


/ Descriptions


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning

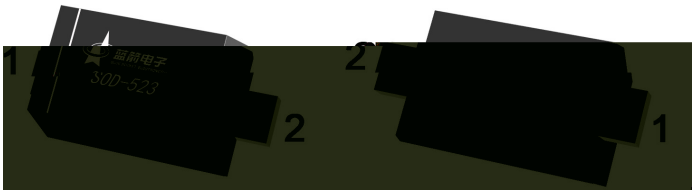

The recommended mounting pad size

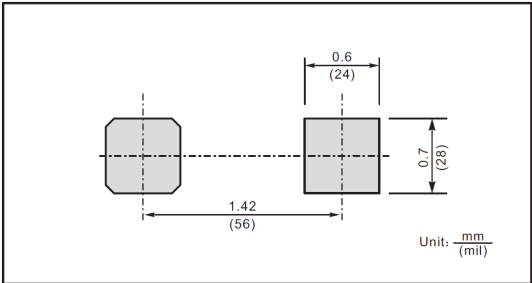

/ Marking

--	--

/ Absolute Maximum Ratings(Ta=25)

			℃
			℃

/ Electrical Characteristics(Ta=25)

		μ				
						μ

/ Electrical Characteristic Curve

Fig.1 Power Derating Curve




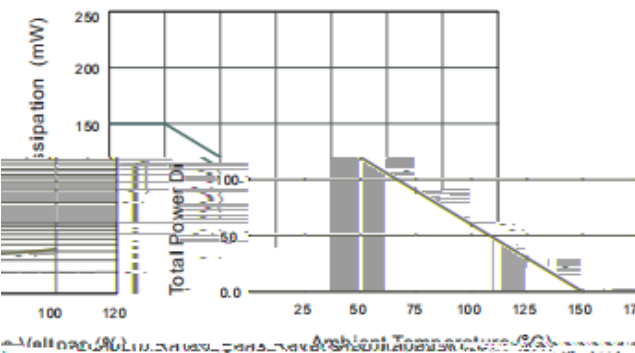


Fig.2 Typical Reverse Characteristics

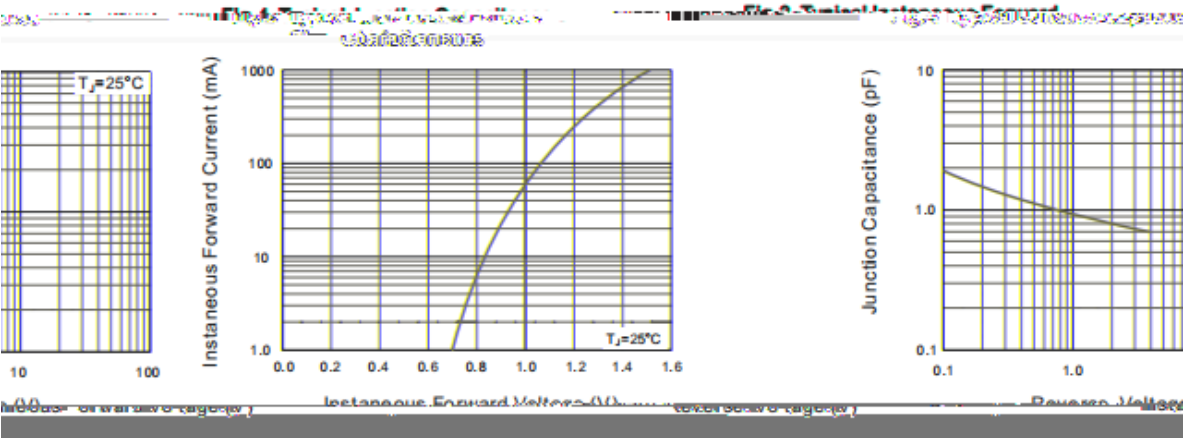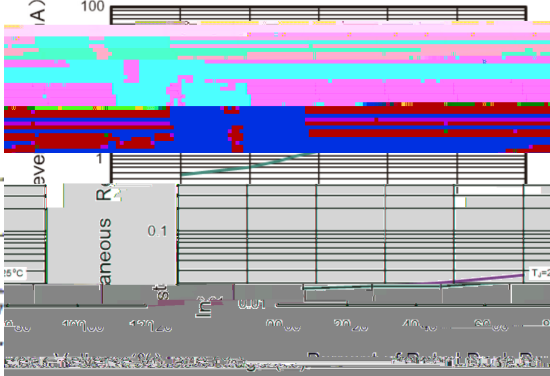


/ Package Dimensions

SOD-523

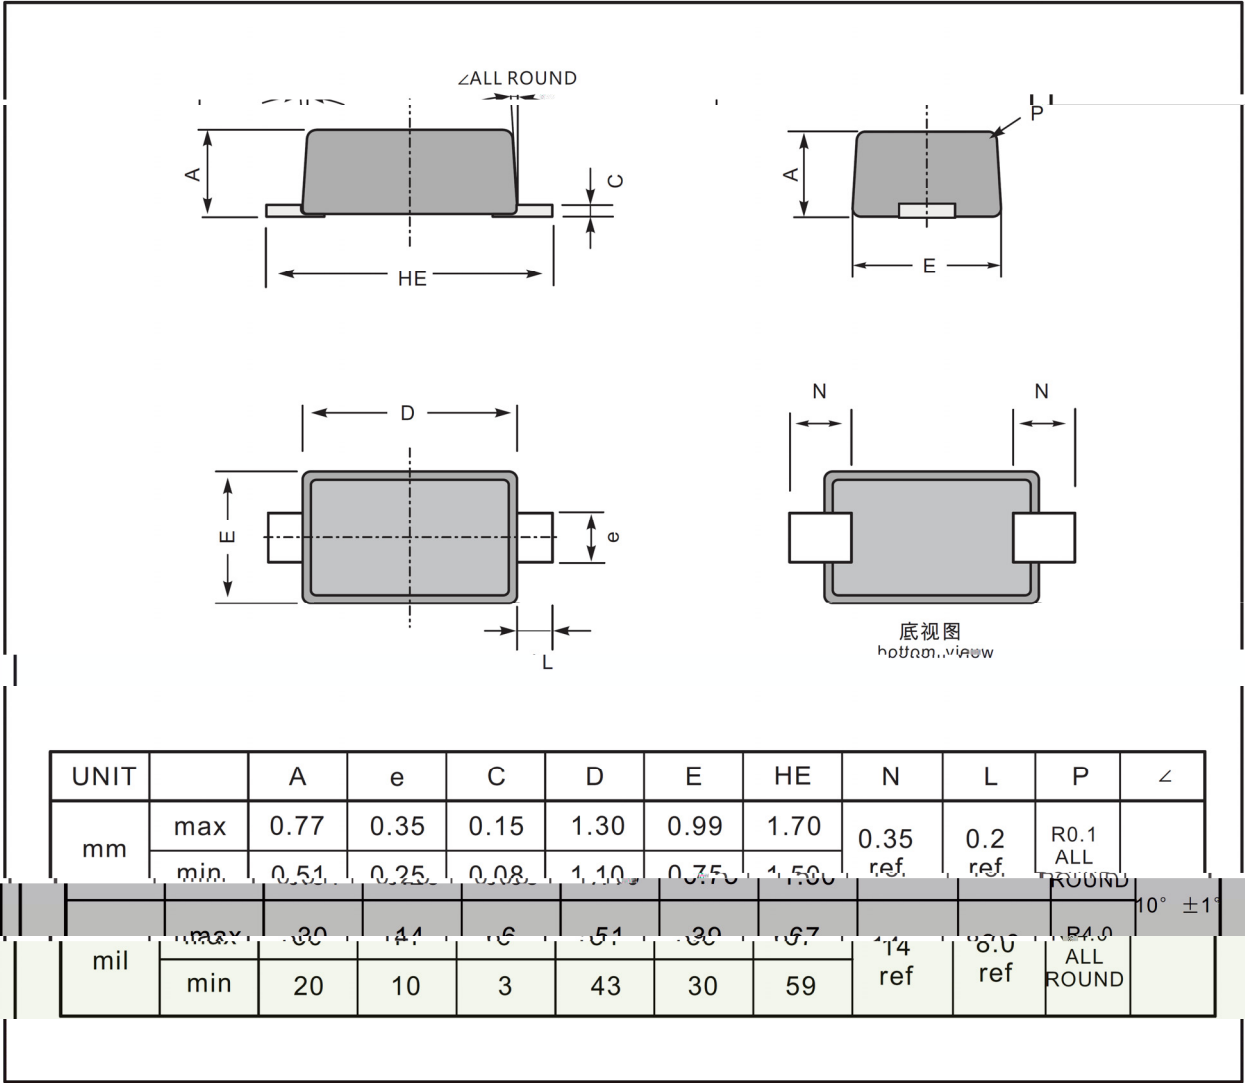


/ Marking Instructions

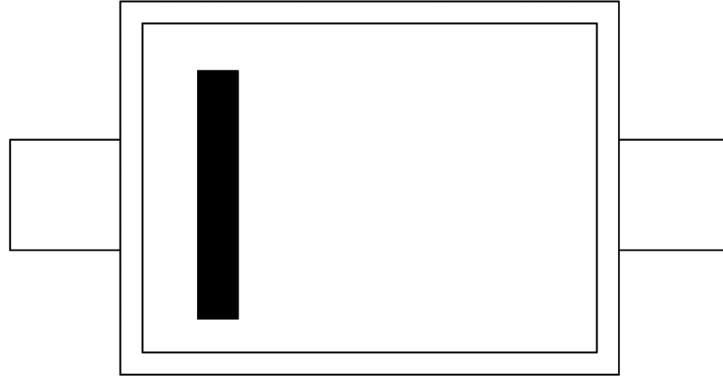

T4

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

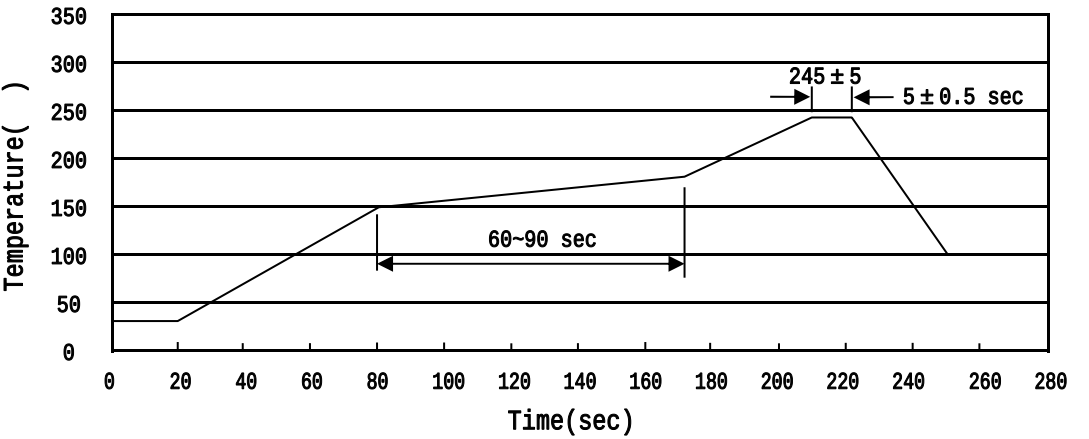

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

/ Notices