

/ Descriptions


TO-3P PNP

/ Features


100W 2SC5200

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


						μ
						μ



/ Electrical Characteristic Curve

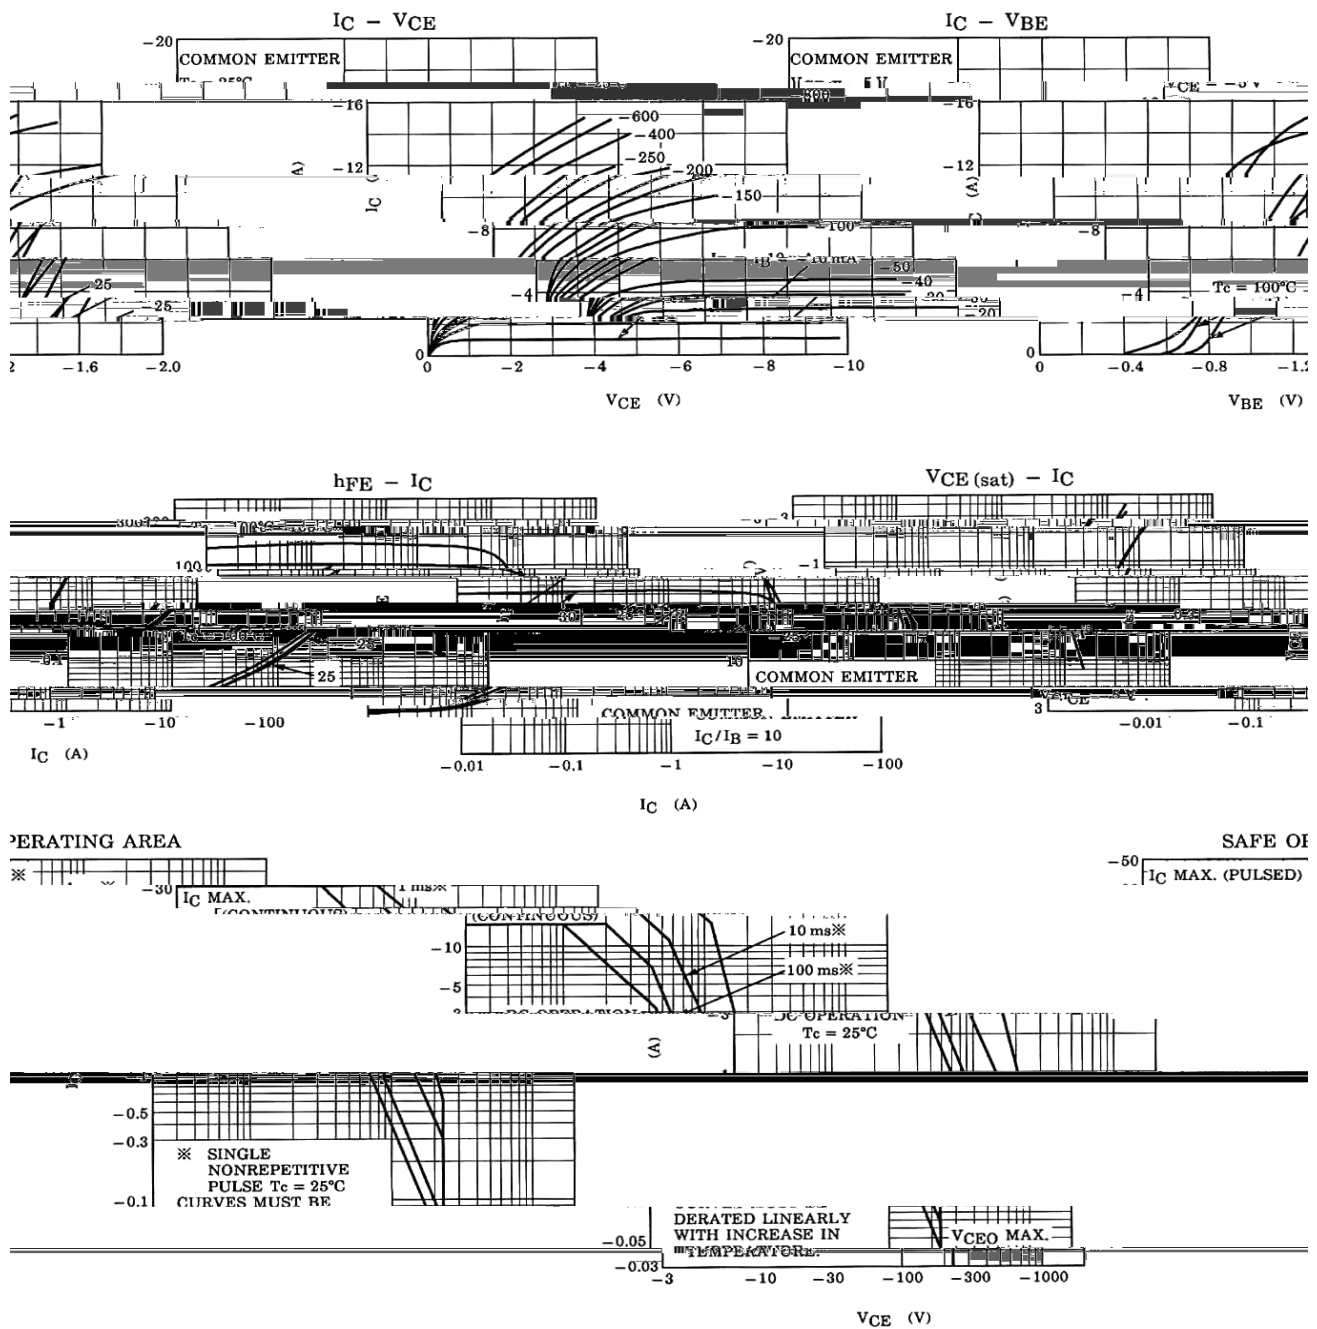

/ Marking Instructions

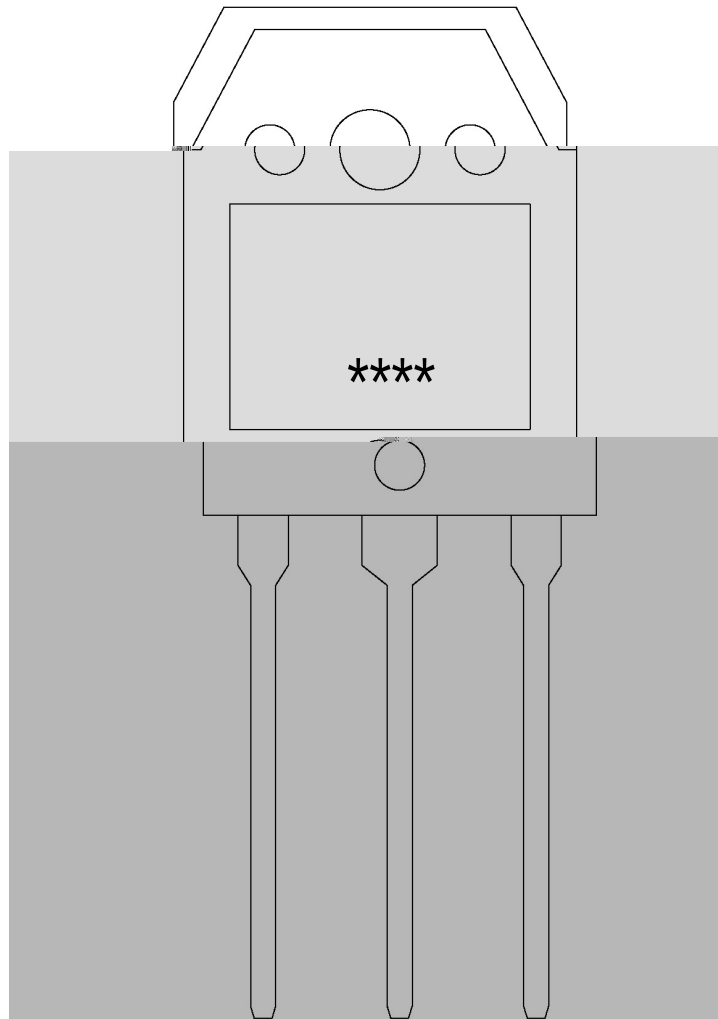


BR

A1943

O:

() / Temperature Profile for Dip Soldering(Pb-Free)

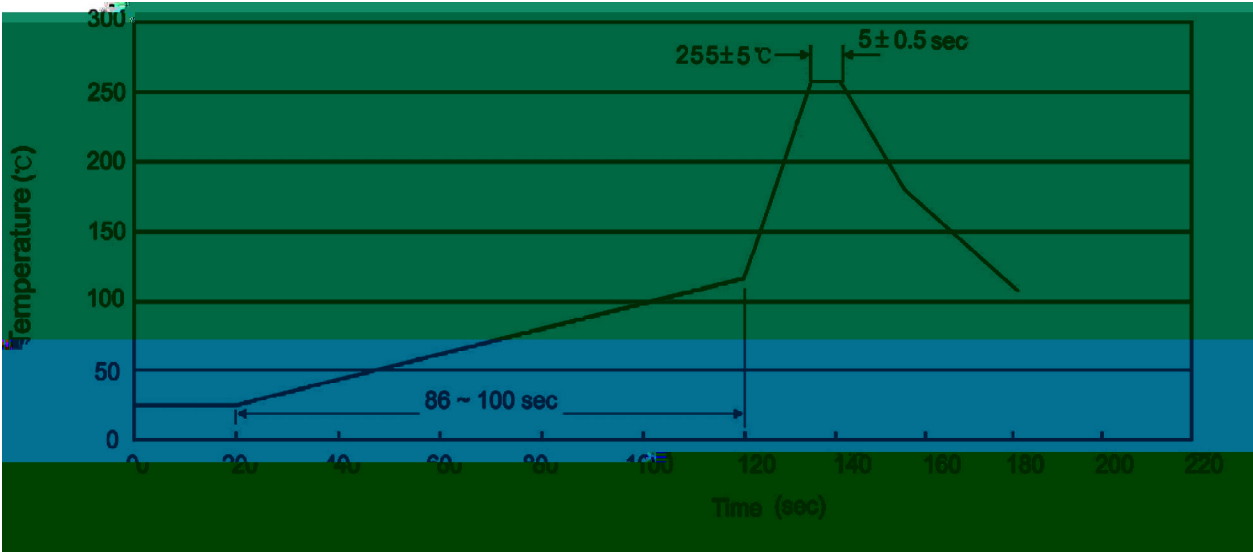

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

包装数量			包装尺寸	:
封装形式	Units/Tube 只/套管	Tubes/Inner Box 套管/盒		