


SOT-23 PNP

2SC5342S

/ Equivalent Circuit




/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

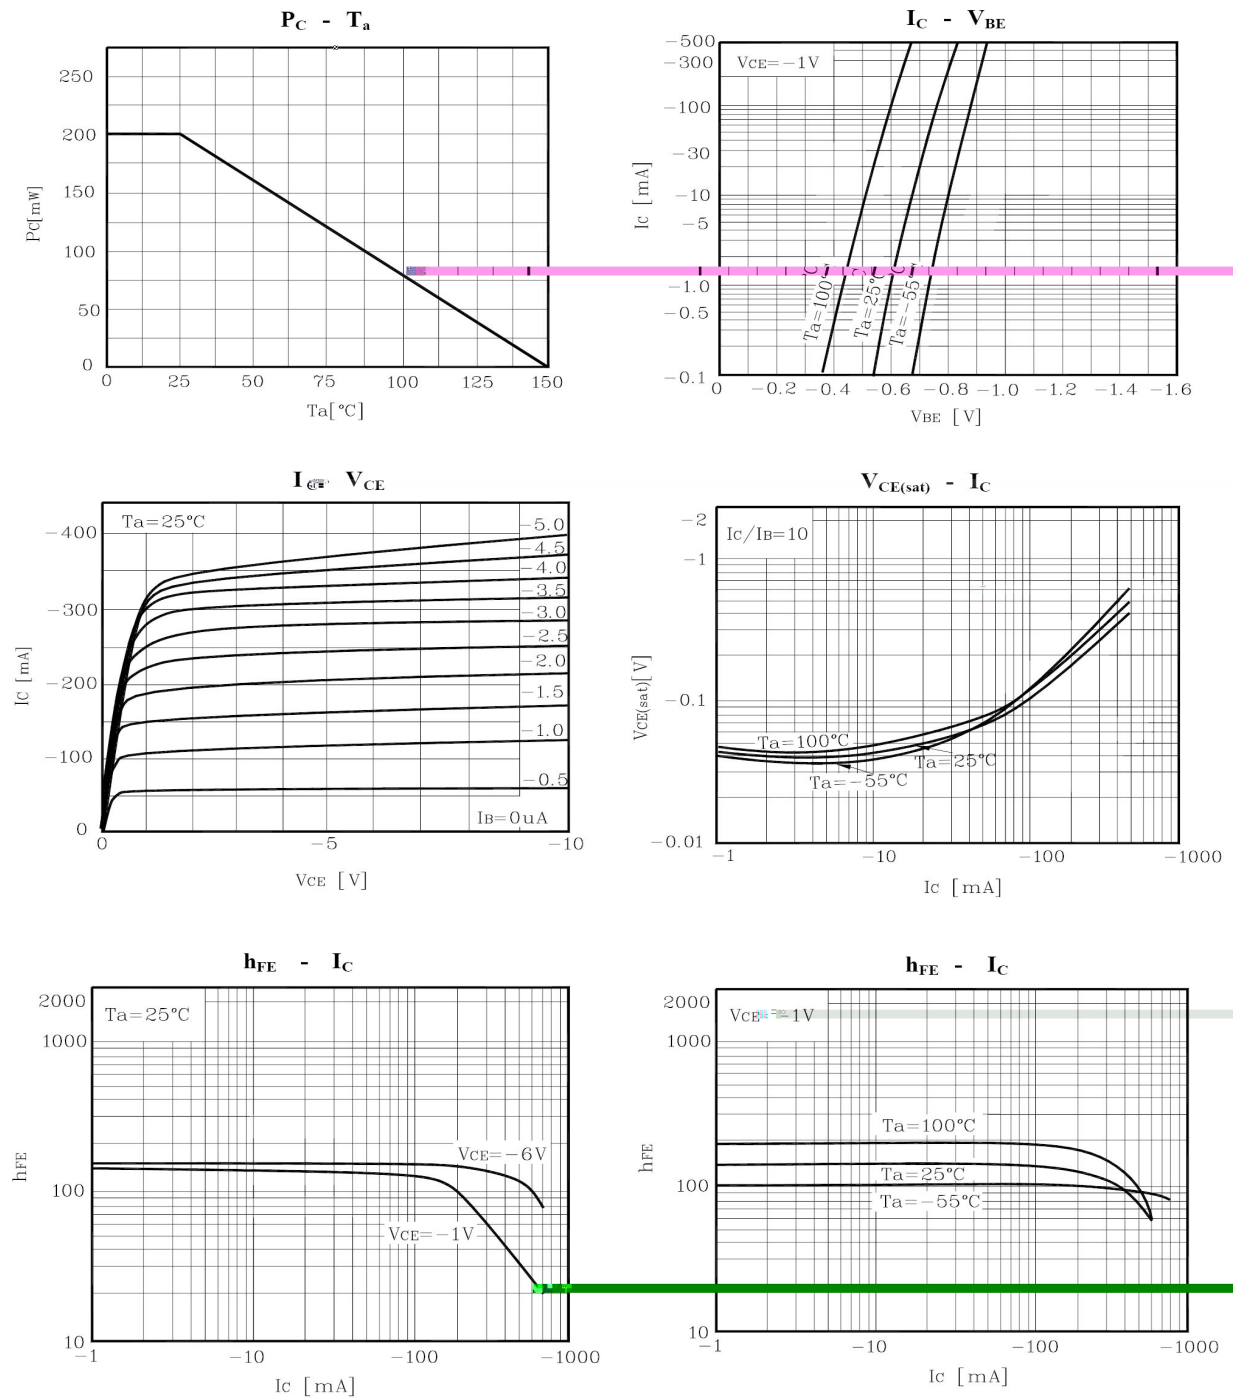


/ Package Dimensions

SOT-23

单位: mm

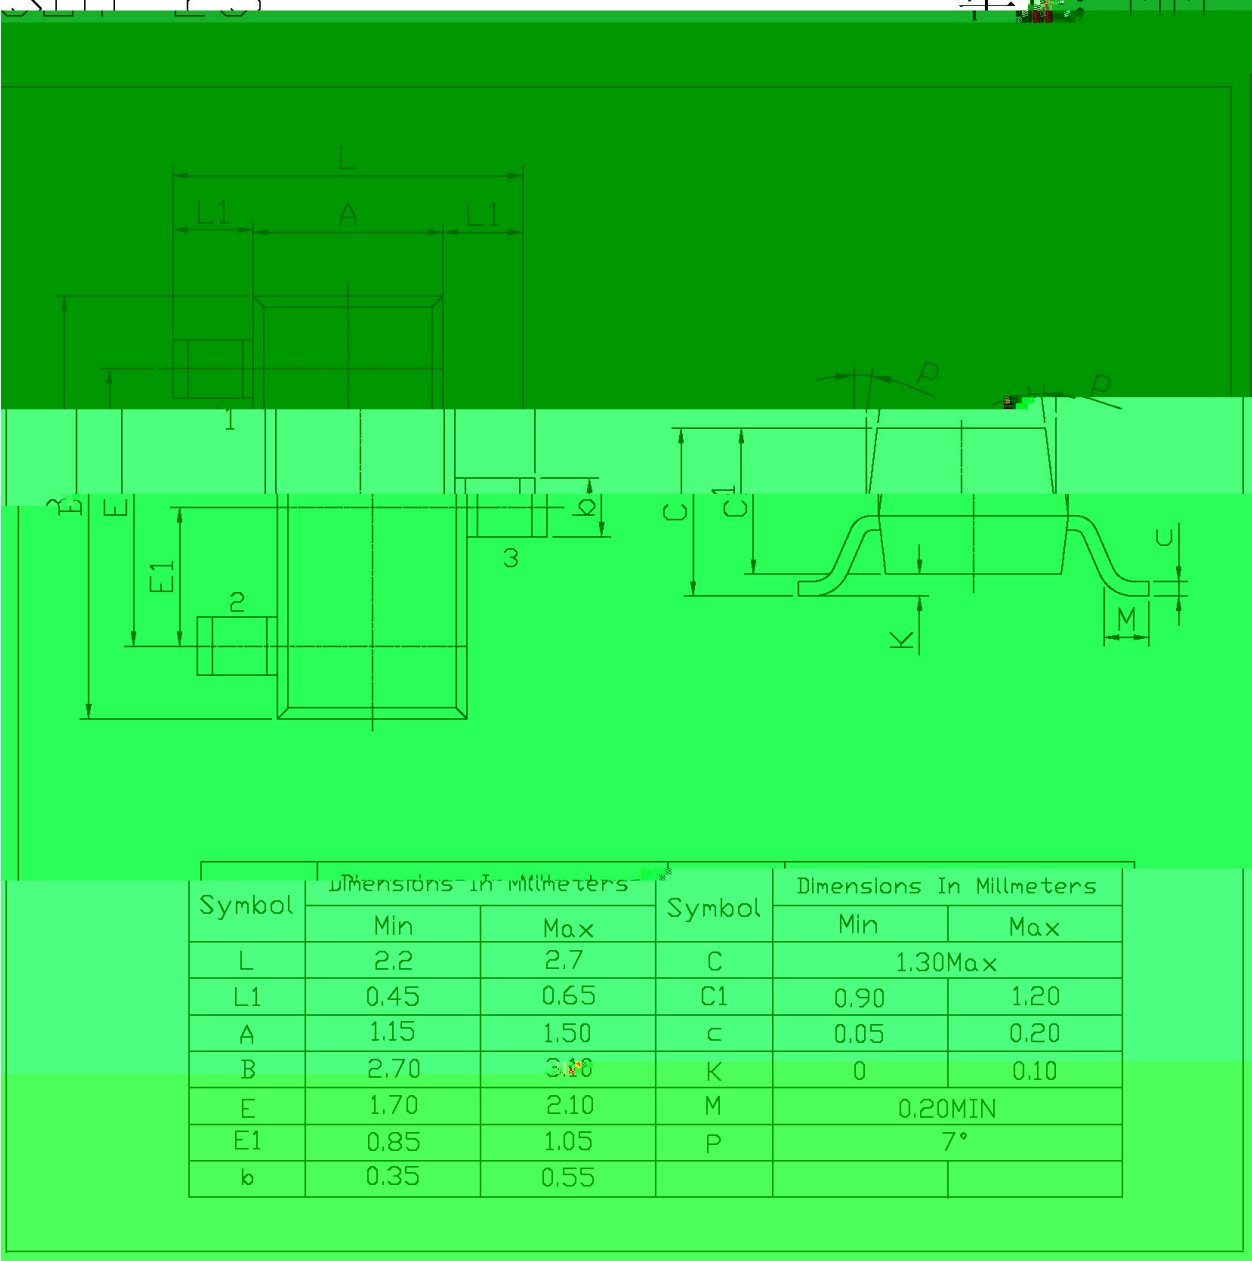

/ Marking Instructions

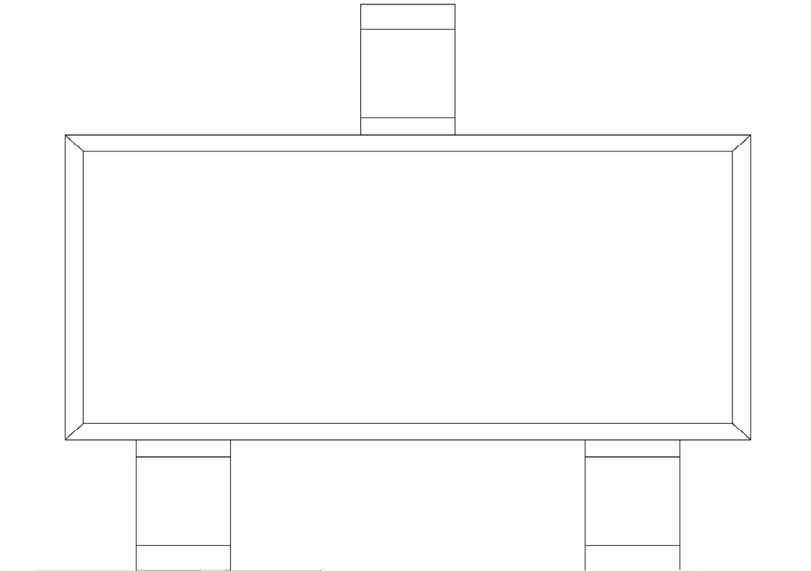

H
AA
O:

Figure 1 is a line graph showing the temperature profile of the test specimen over time. The y-axis represents Temperature in degrees Celsius (°C), ranging from 0 to 350. The x-axis represents Time in seconds (sec), ranging from -30 to 260. The profile starts at 25°C, ramps up to 150°C at 50 seconds, holds for 60 ~ 90 seconds, ramps up to 245 ± 5°C at 180 seconds, holds for 5 ± 0.5 seconds, and then ramps down to 100°C at 220 seconds.

 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

包装数量

包装用 86.4(s6785)903(Ou 86.4ter)8721