


Silicon PNP transistor in a TO-220F Plastic Package.


Low $V_{CE(sat)}$, excellent DC current gain characteristics, wide SOA, complements the 2SD1833.


General power amplifier applications.



PIN1	Base	PIN 2	Collector	PIN 3	Emitter
------	------	-------	-----------	-------	---------

See Marking Instructions.

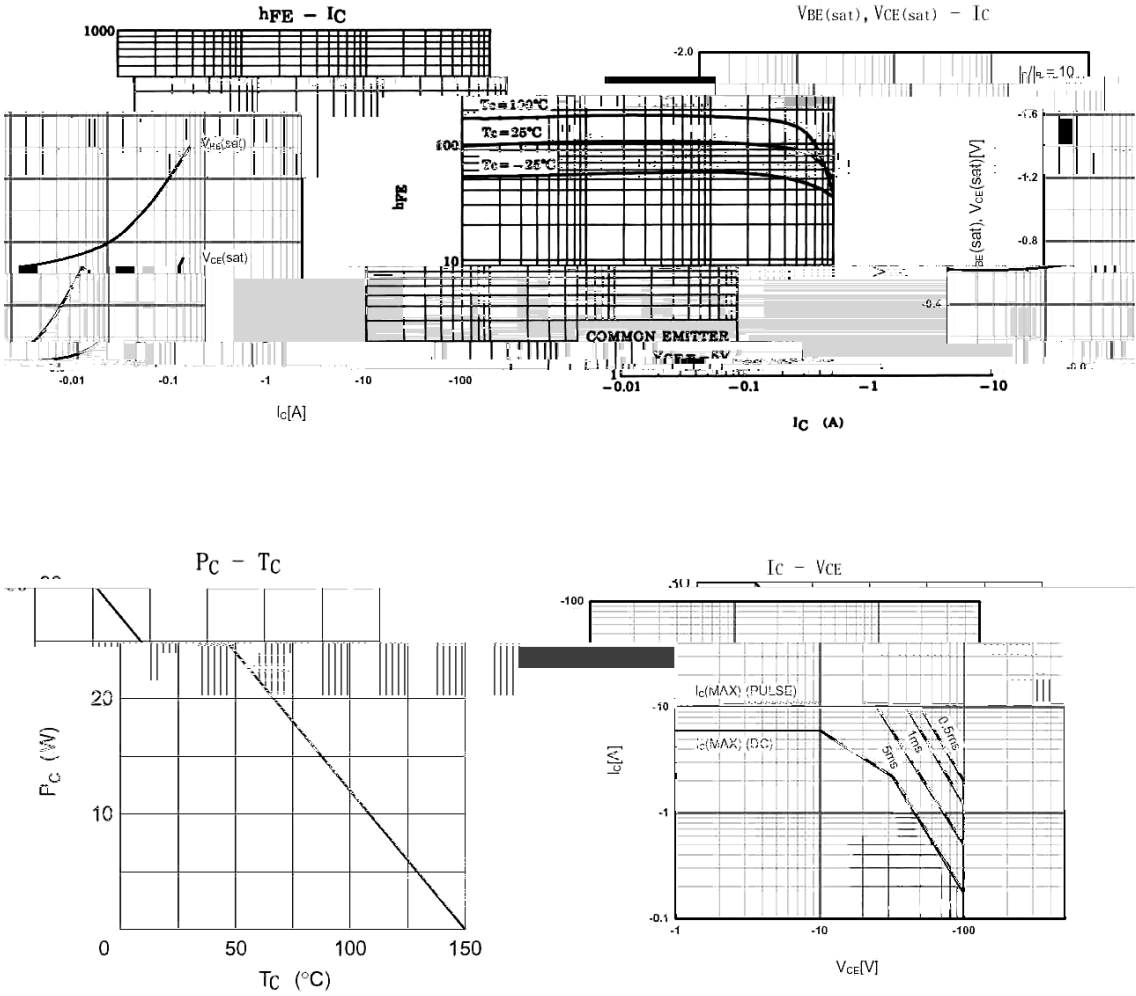

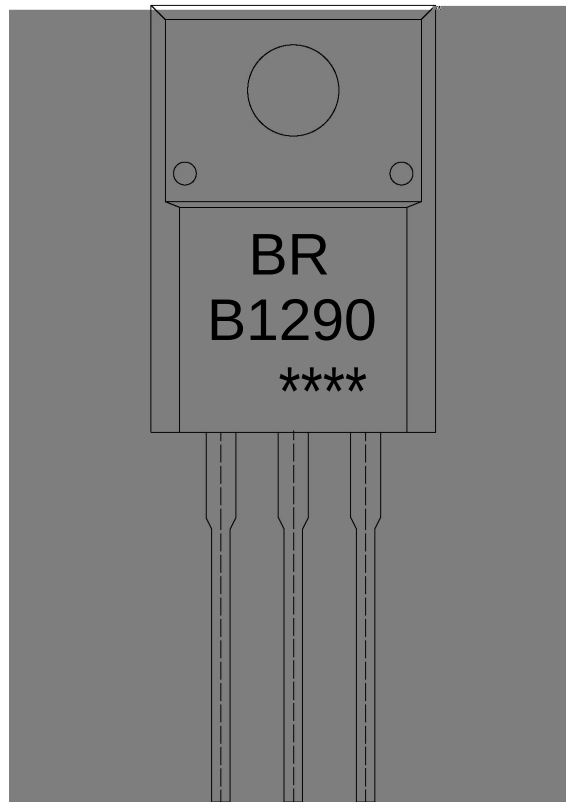


Note:

BR: Company Code.

B1290: Product Type.

****: Lot No. Code, code change with Lot No.

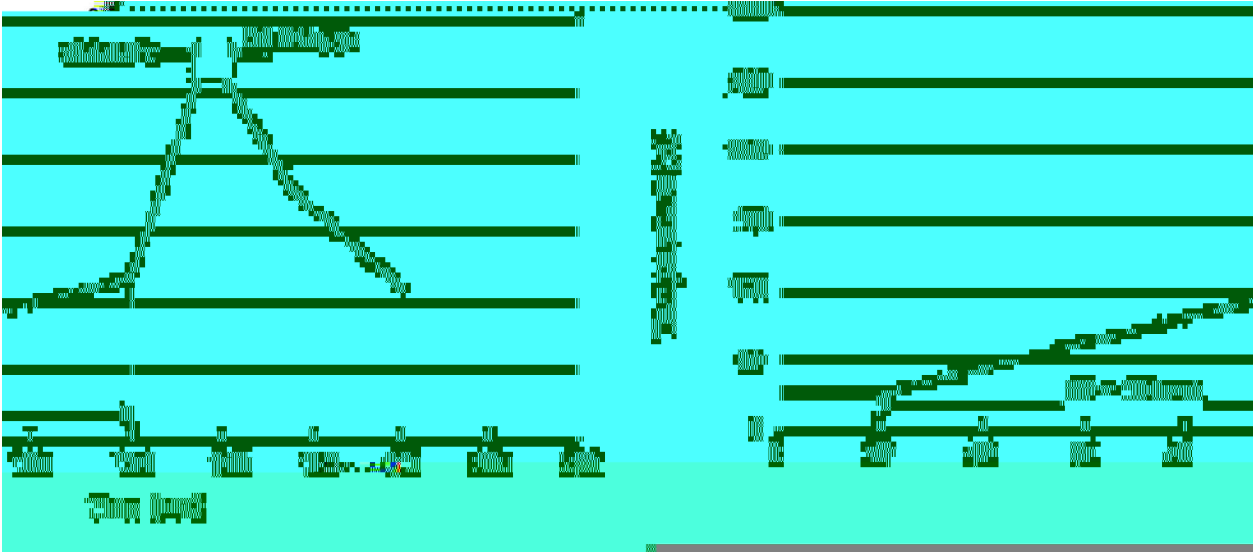

- 1

25 150

60 90sec;
- 2

255 5

5 0.5sec;
- 3

2 10

/sec.
- Note:
1.Preheating:25~150 , Time:60~90sec.
2.Peak Temp.:255 5 , Duration:5 0.5sec.
3. Cooling Speed: 2~10 /sec.

270 5

10 1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量		Dimension 包装尺寸 (unit: mm ³)
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	