



/ Descriptions

TO-126F PNP


/ Features**/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

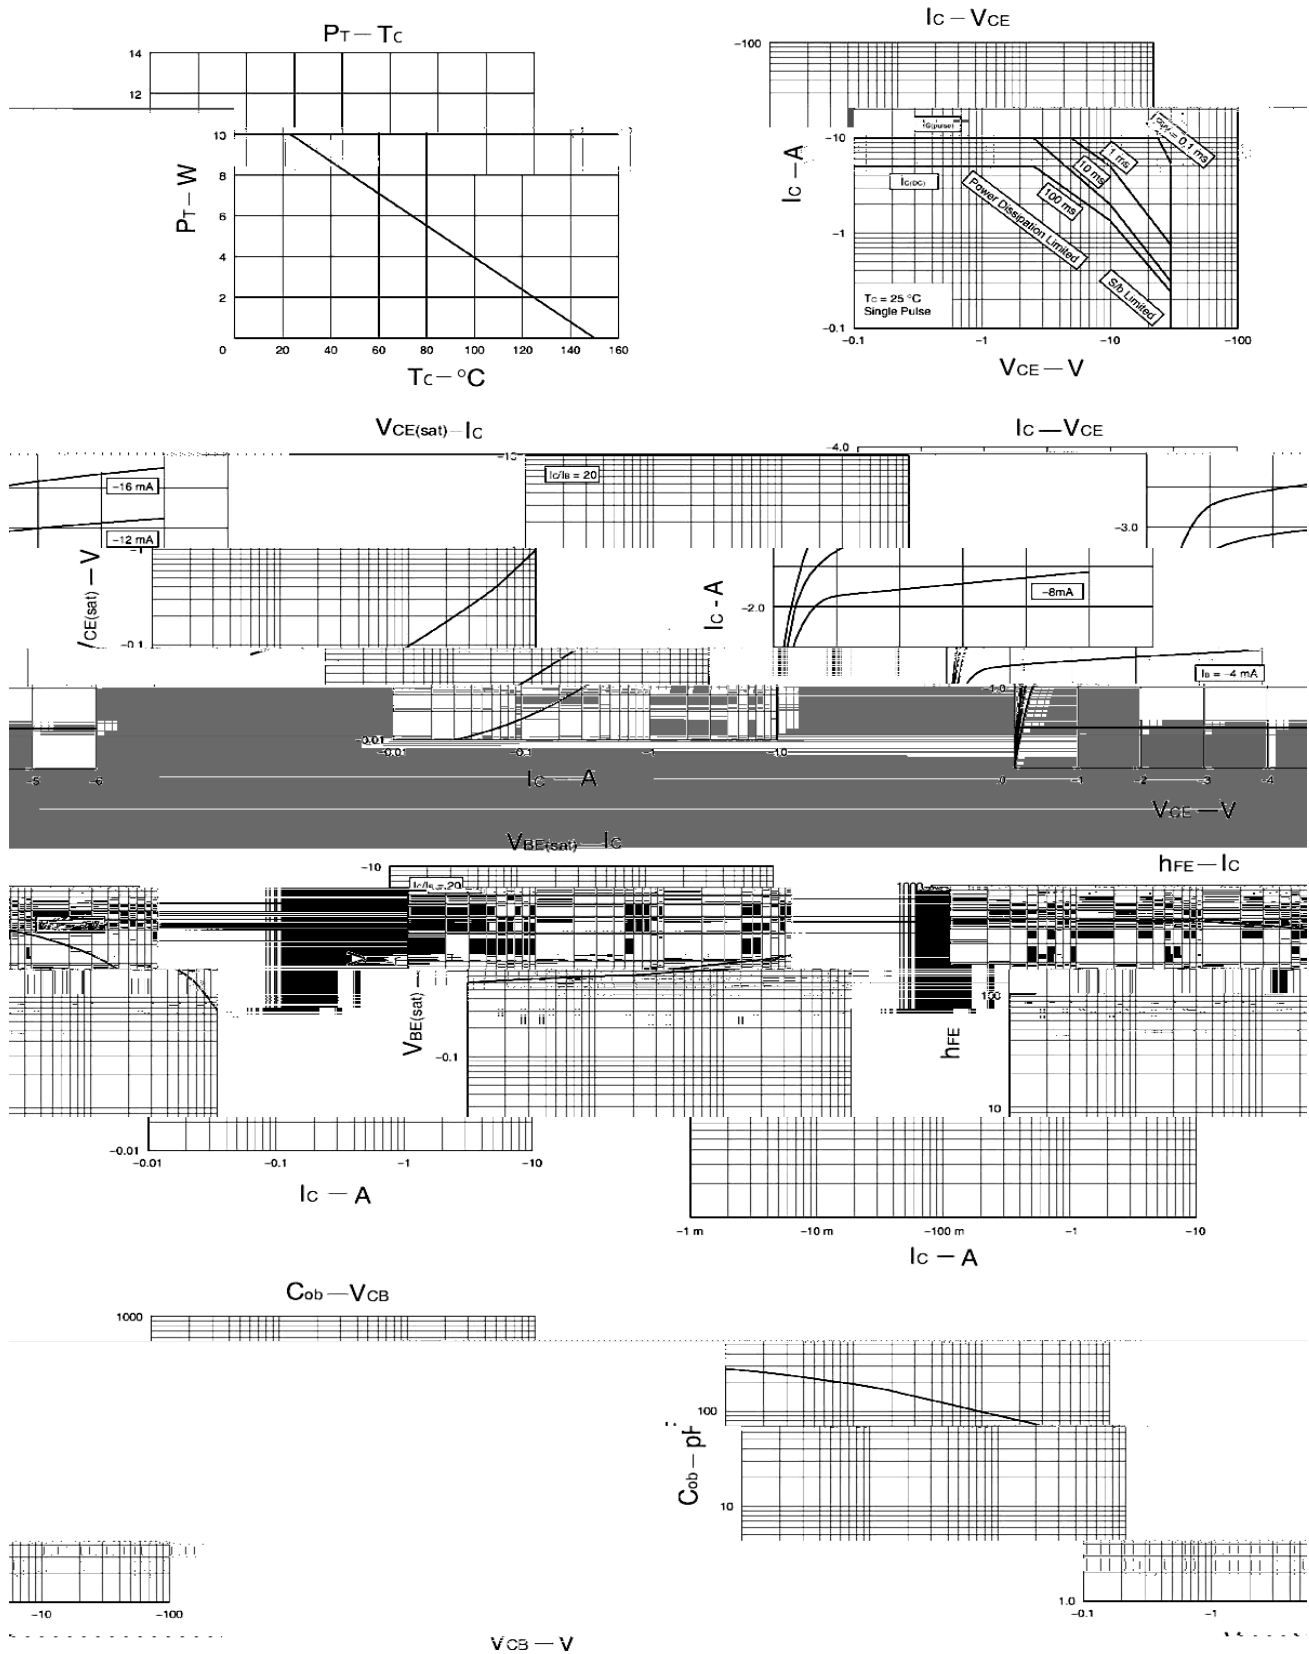

/ Package Dimensions


TO-18

单位: mm

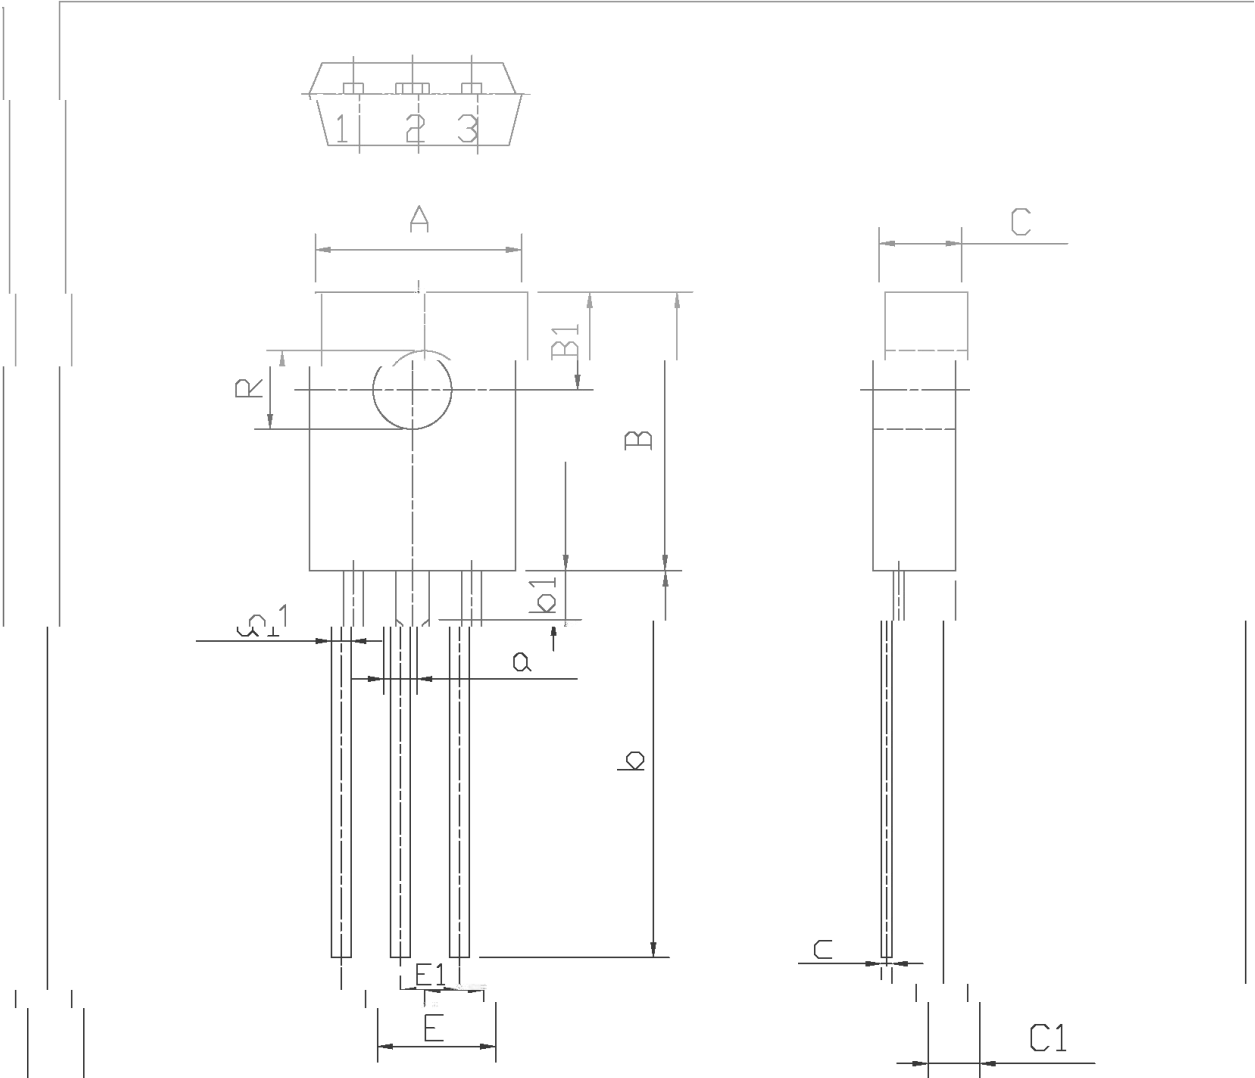

Symbol	Dimension in Millimeters		Symbol	Dimension in Millimeters	
	Min	Max		Min	Max
A	7.8	8.2	a1	0.65	0.85
B	10.0	11.2	E	4.4	4.8
B1	3.8	4.2	C	3.1	3.3
R	2.95	3.15	C1	1.9	2.1
b	14	16	c	0.3	0.6
b1	1.9		a	1.27	
E1	2.1	2.5			

/ Marking Instructions

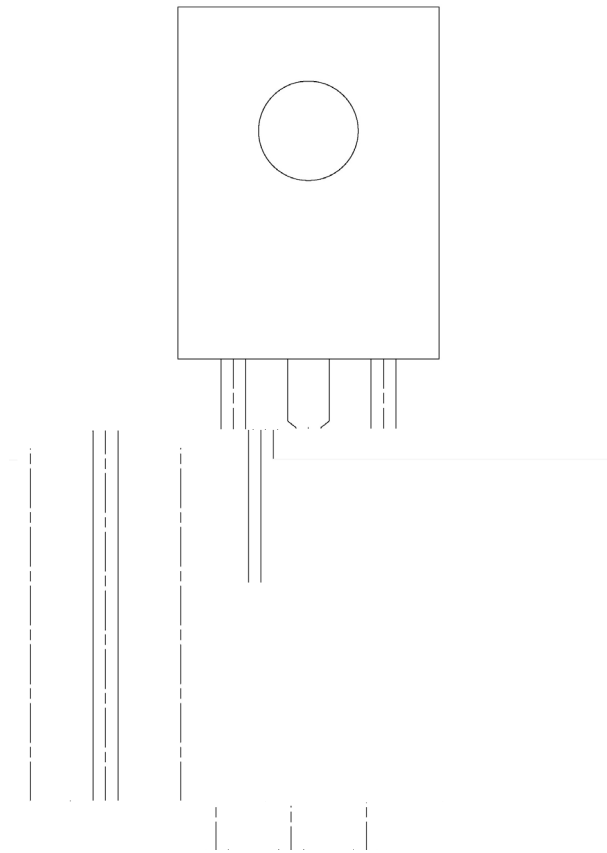

BR
B1658

Figure 1 consists of two plots. The left plot shows the number of iterations required for convergence (Y-axis, 0 to 100) versus the number of iterations (X-axis, 0 to 100). The right plot shows the number of iterations required for convergence (Y-axis, 0 to 100) versus the number of iterations (X-axis, 0 to 100). Both plots show a sharp increase in the number of iterations required for convergence as the number of iterations increases, peaking around 50 iterations.

 $\pm$ $\pm$

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

封装形式	包装数量					包装尺寸 :		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

6 6