


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SD786

Ultra-low noise, low base resistance, low noise voltage, complementary pair with 2SD786.

Ultra-low noise low-frequency amplification, low base resistance for use in MC Head amplifiers.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	120~270	180~390	270~560

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBO}	0.5 5.995V	

T0-92

Unit: mm

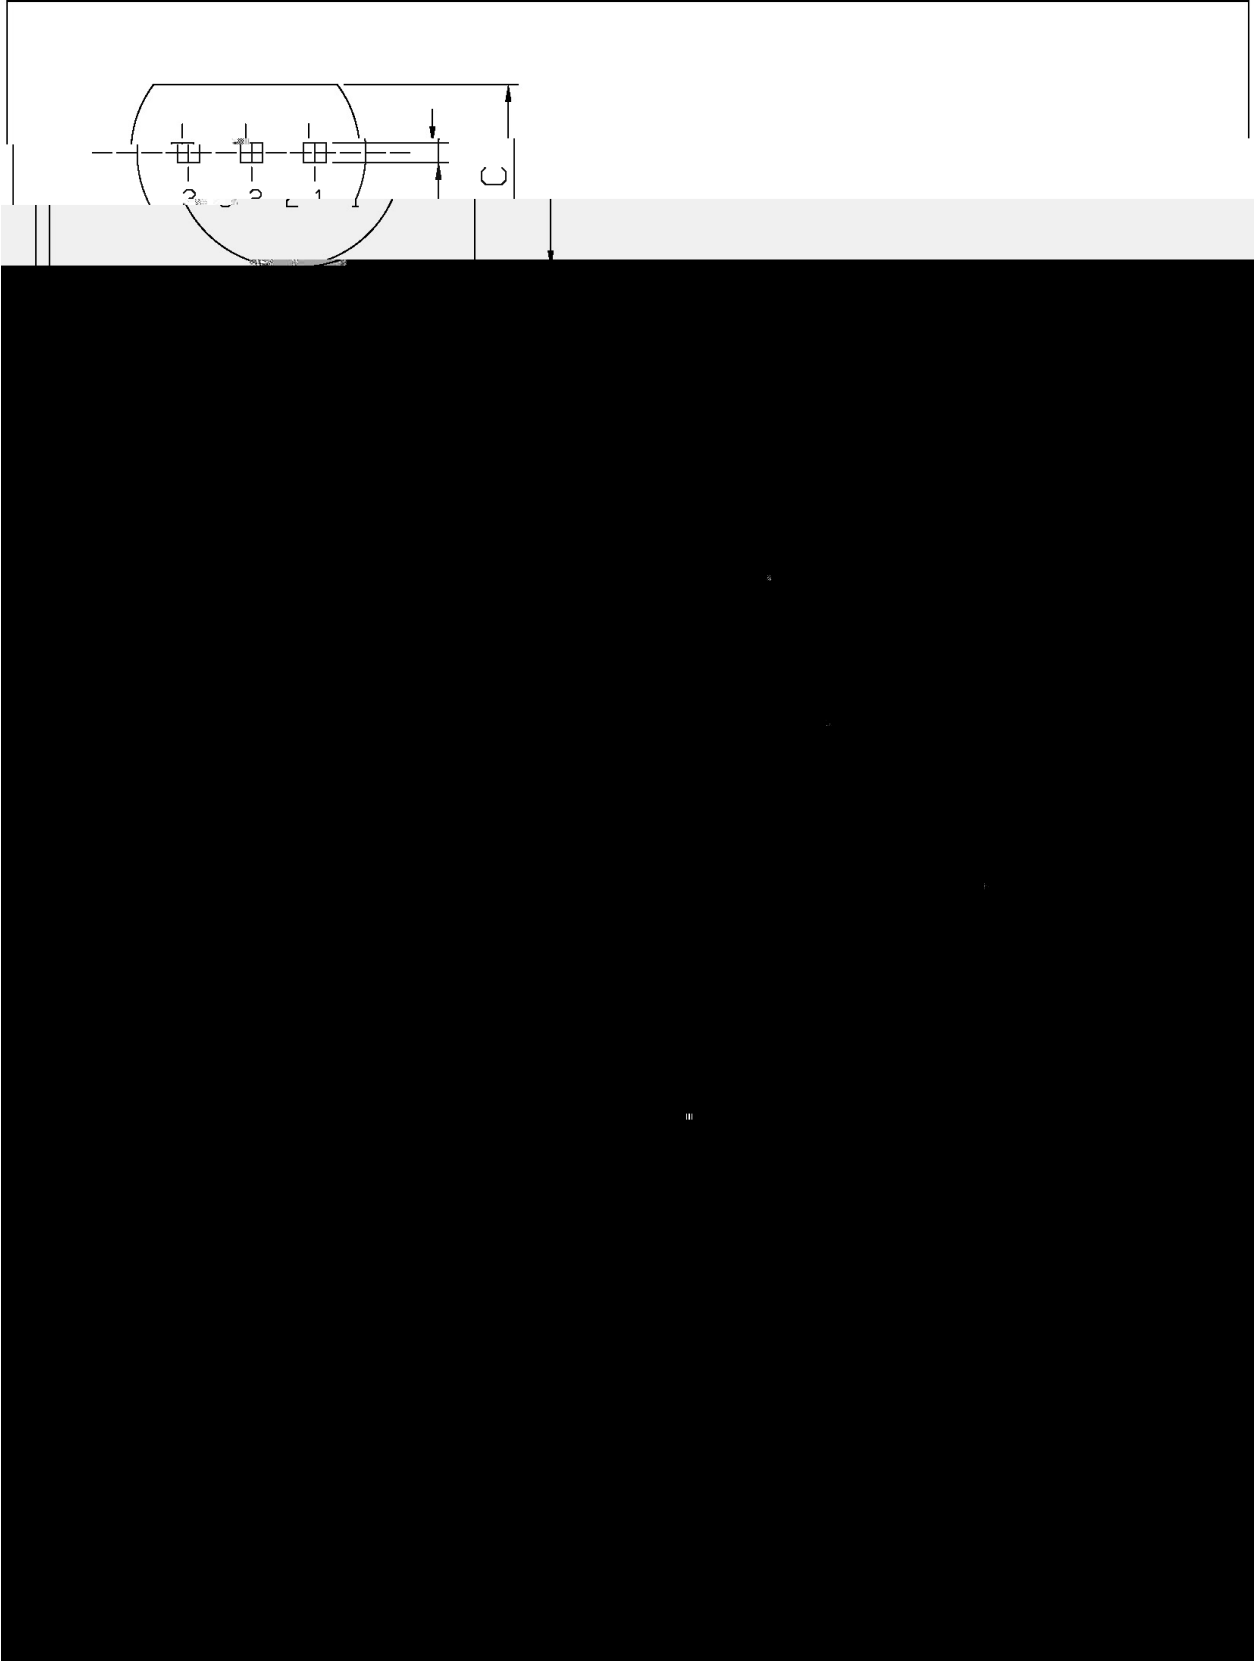

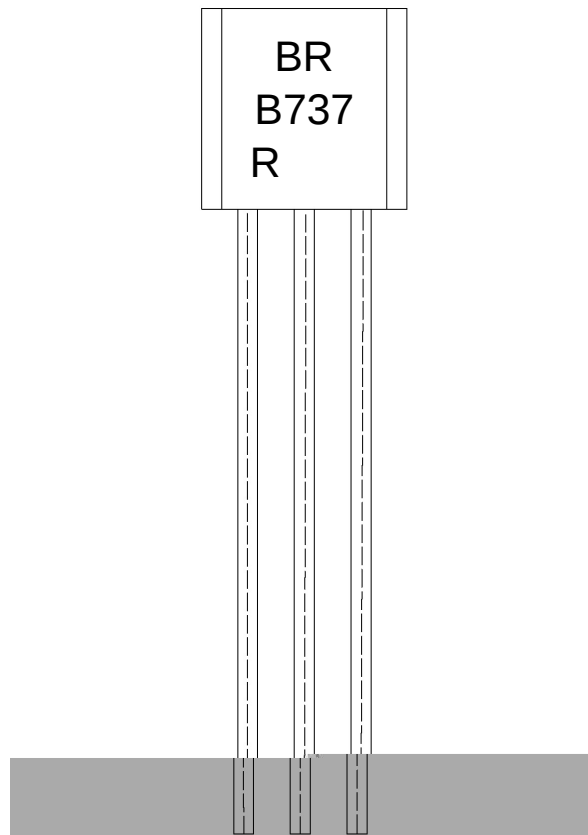

BR:

B737

R: h_{FE}


Note:

BR: Company Code.

B737: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

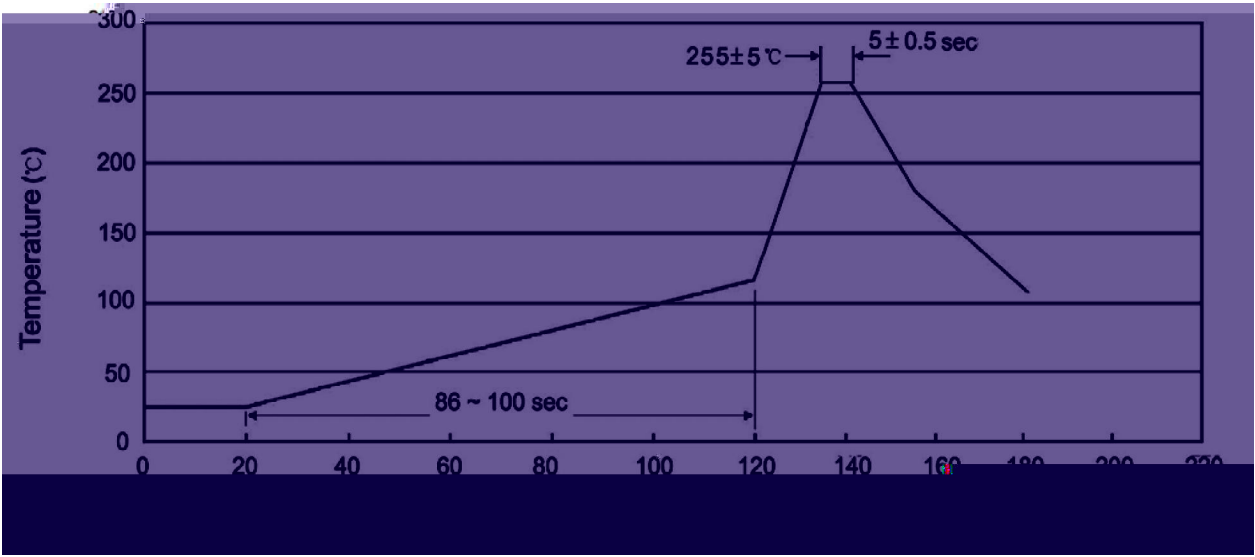

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

，Time:60~90sec.
- 2.Peak Temp.:255±5

，Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

270±5

10±1 sec.

Temp:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 大箱