


SOT-23

PNP

, h_{FE}







		μ				
		μ				
						μ
						μ
						μ

*


≤300μS

≤ μ


≤2.0%

≤


Static Characteristics

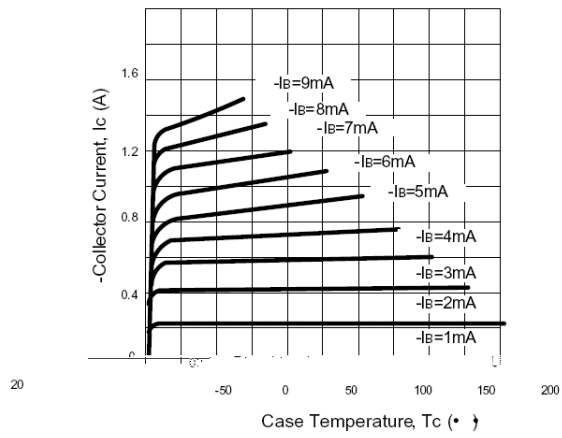


Derating Curve of Safe Operating Areas

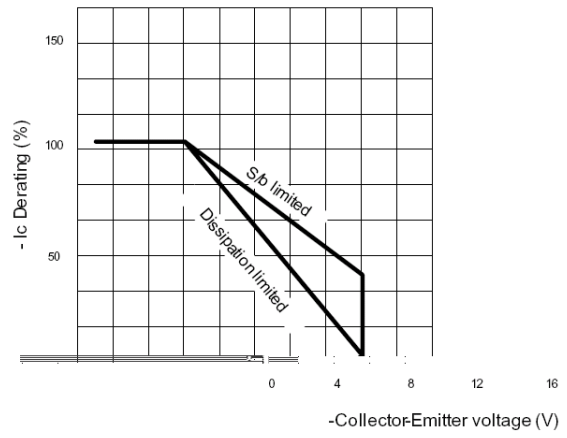



Collector Output Capacitance

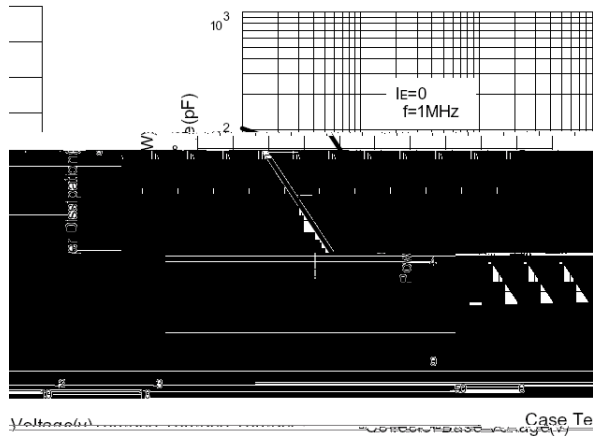


Power Derating

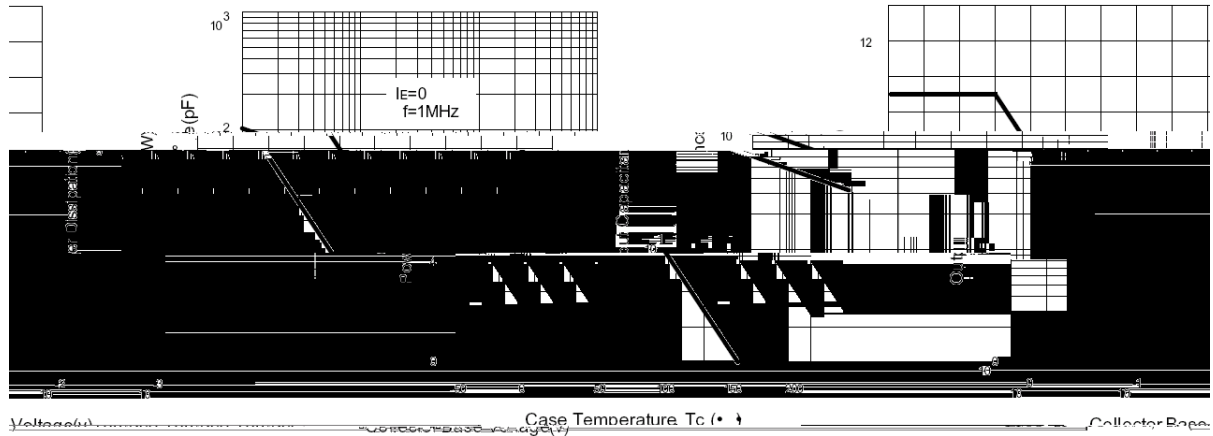

Safe Operating Area

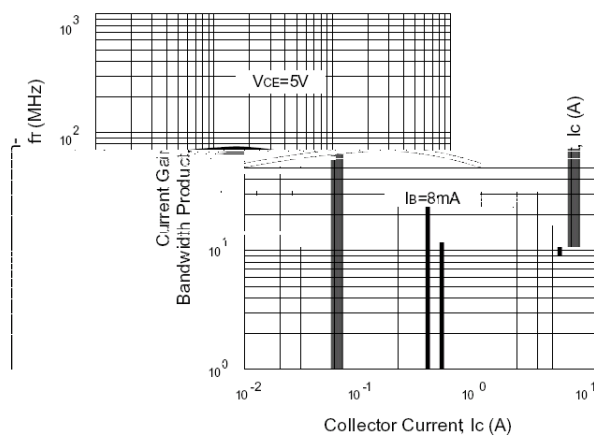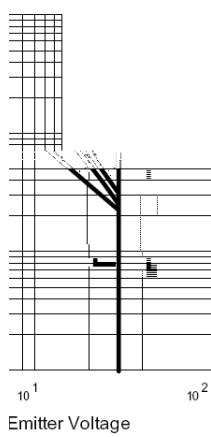



Current Gain - Bandwidth Product

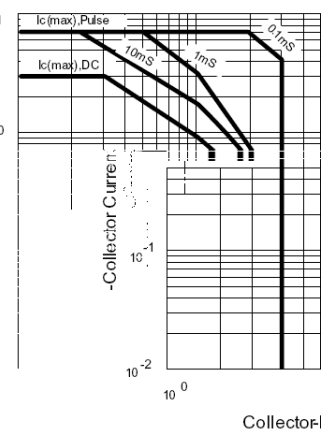

SOT-23


单位: mm

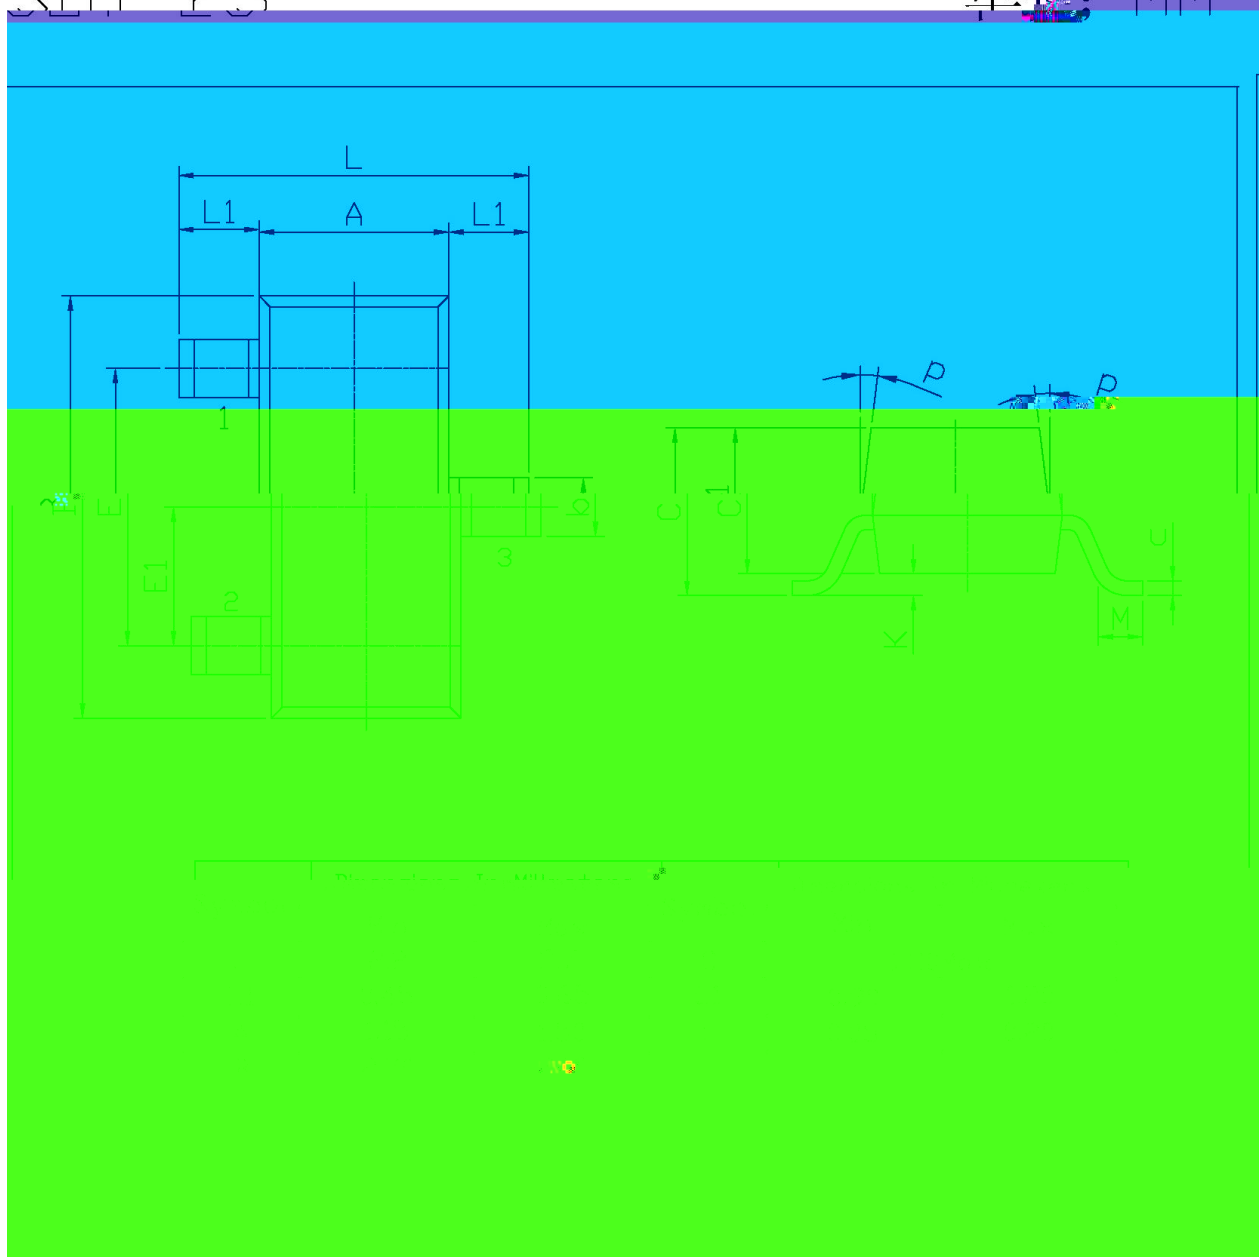

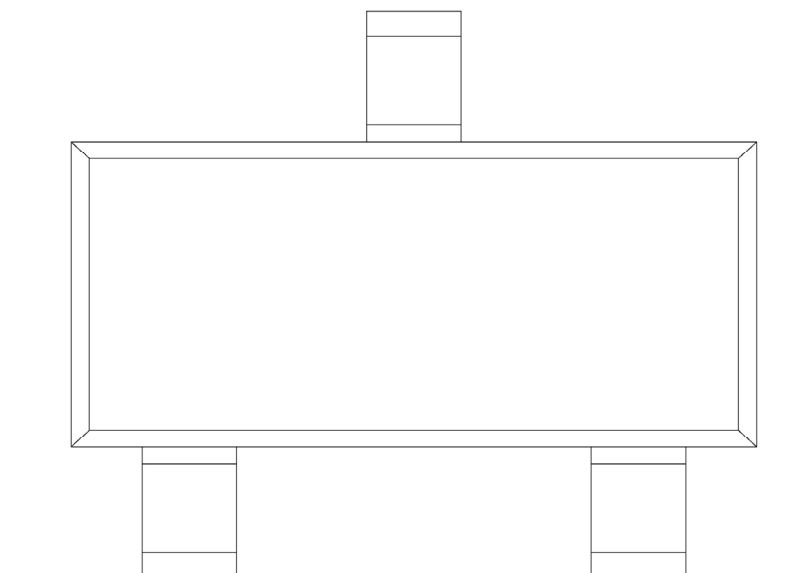

H
72
Q

Temperature Profile for IR Reflow Soldering(Pb-Free)

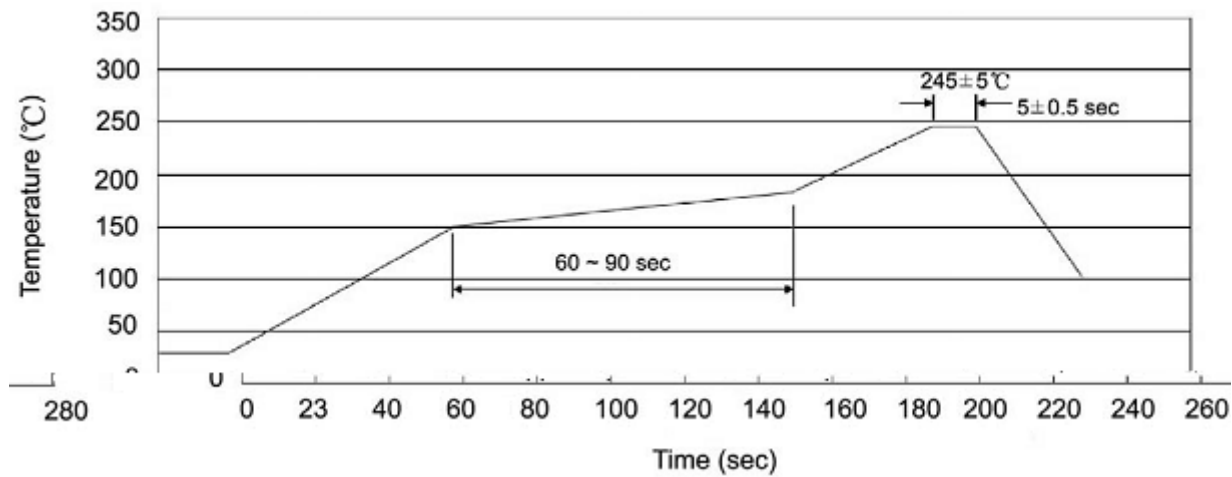

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		