


TO-126F NPN Silicon NPN transistor in a TO-126F Plastic Package.

30 35W 2SA817AF

Driver stage of 30 to 35 watts application, complementary pair with 2SA817AF.


Driver stage amplifier and voltage amplifier.



PIN1 Emitter PIN 2 Collector PIN 3 Base


h_{FE} Classifications Symbol	O	Y
h_{FE} Range	70 140	120 240


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	80	V
Collector to Emitter Voltage	V_{CEO}	80	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	400	mA
Emitter Current – Continuous	I_E	-400	mA
Collector Power Dissipation	P_C	1.0	W
Junction Temperature	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

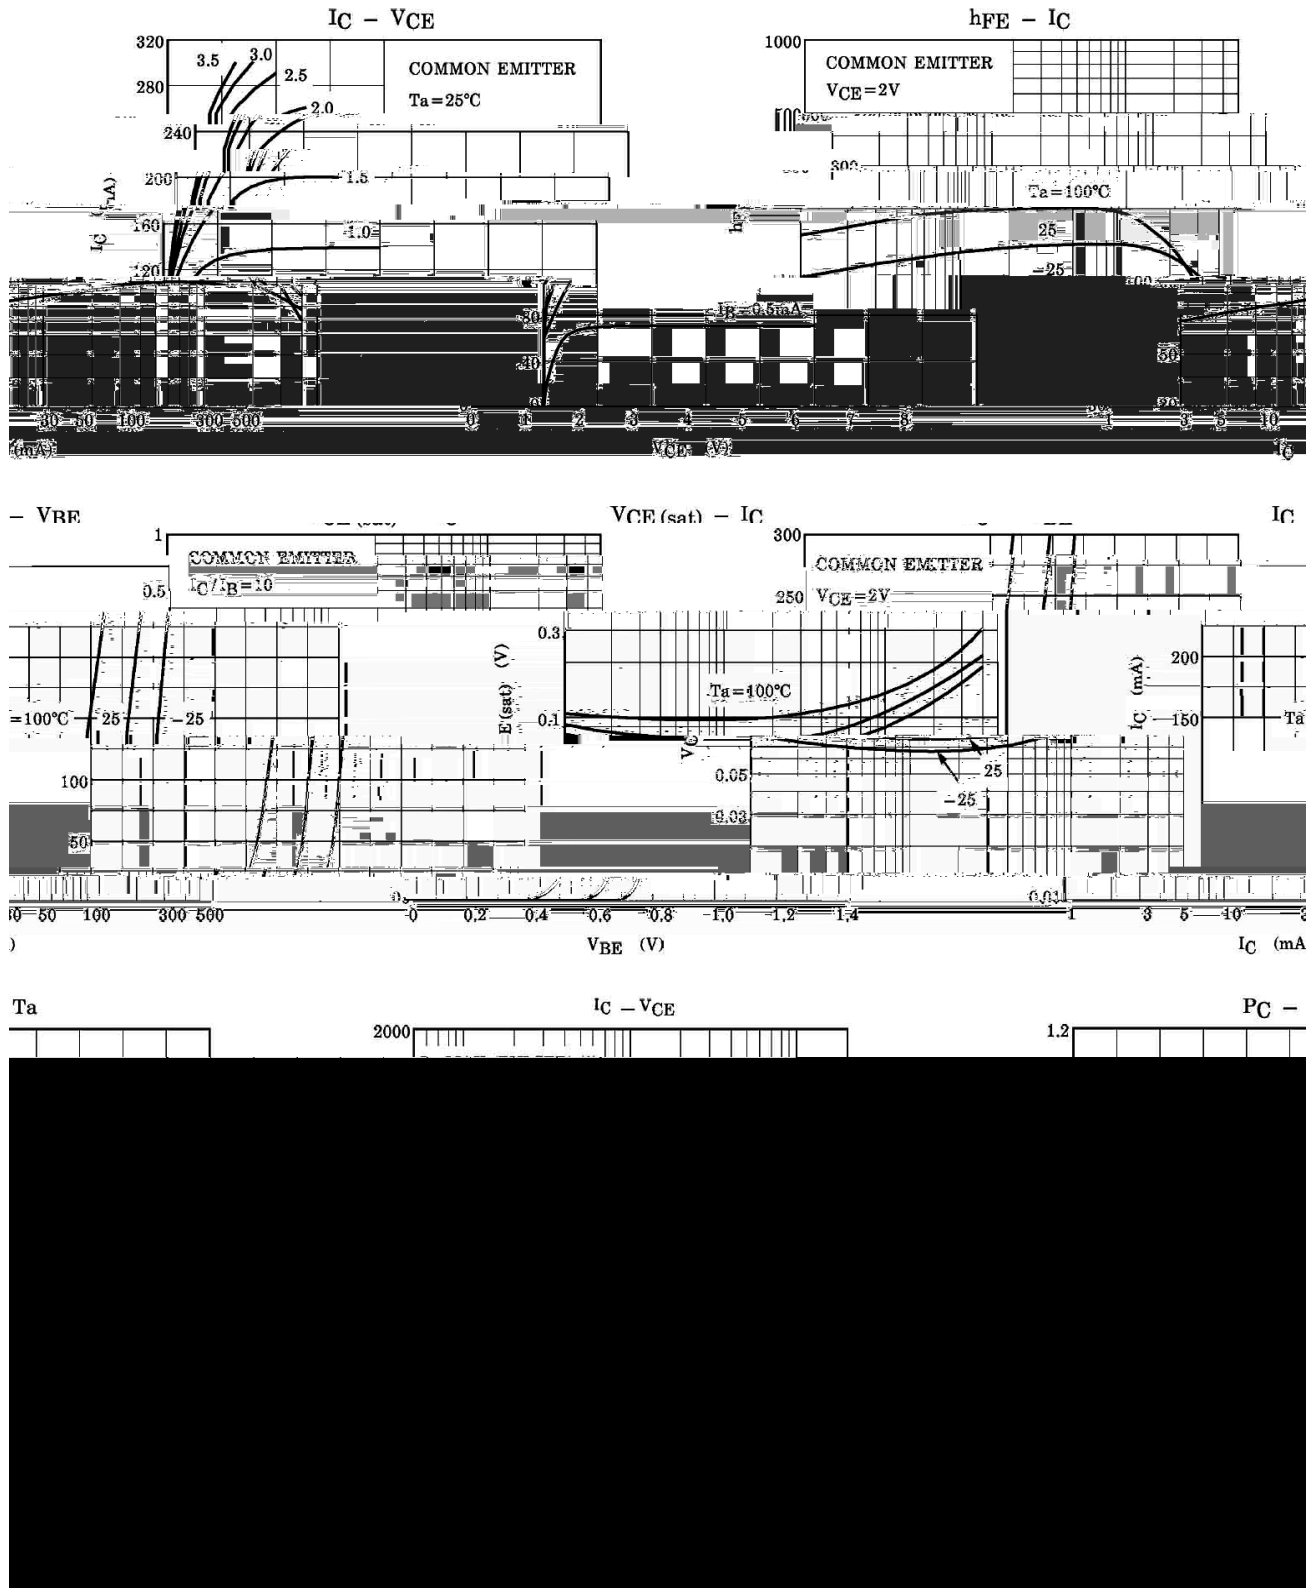

1U-126T

单位: mm

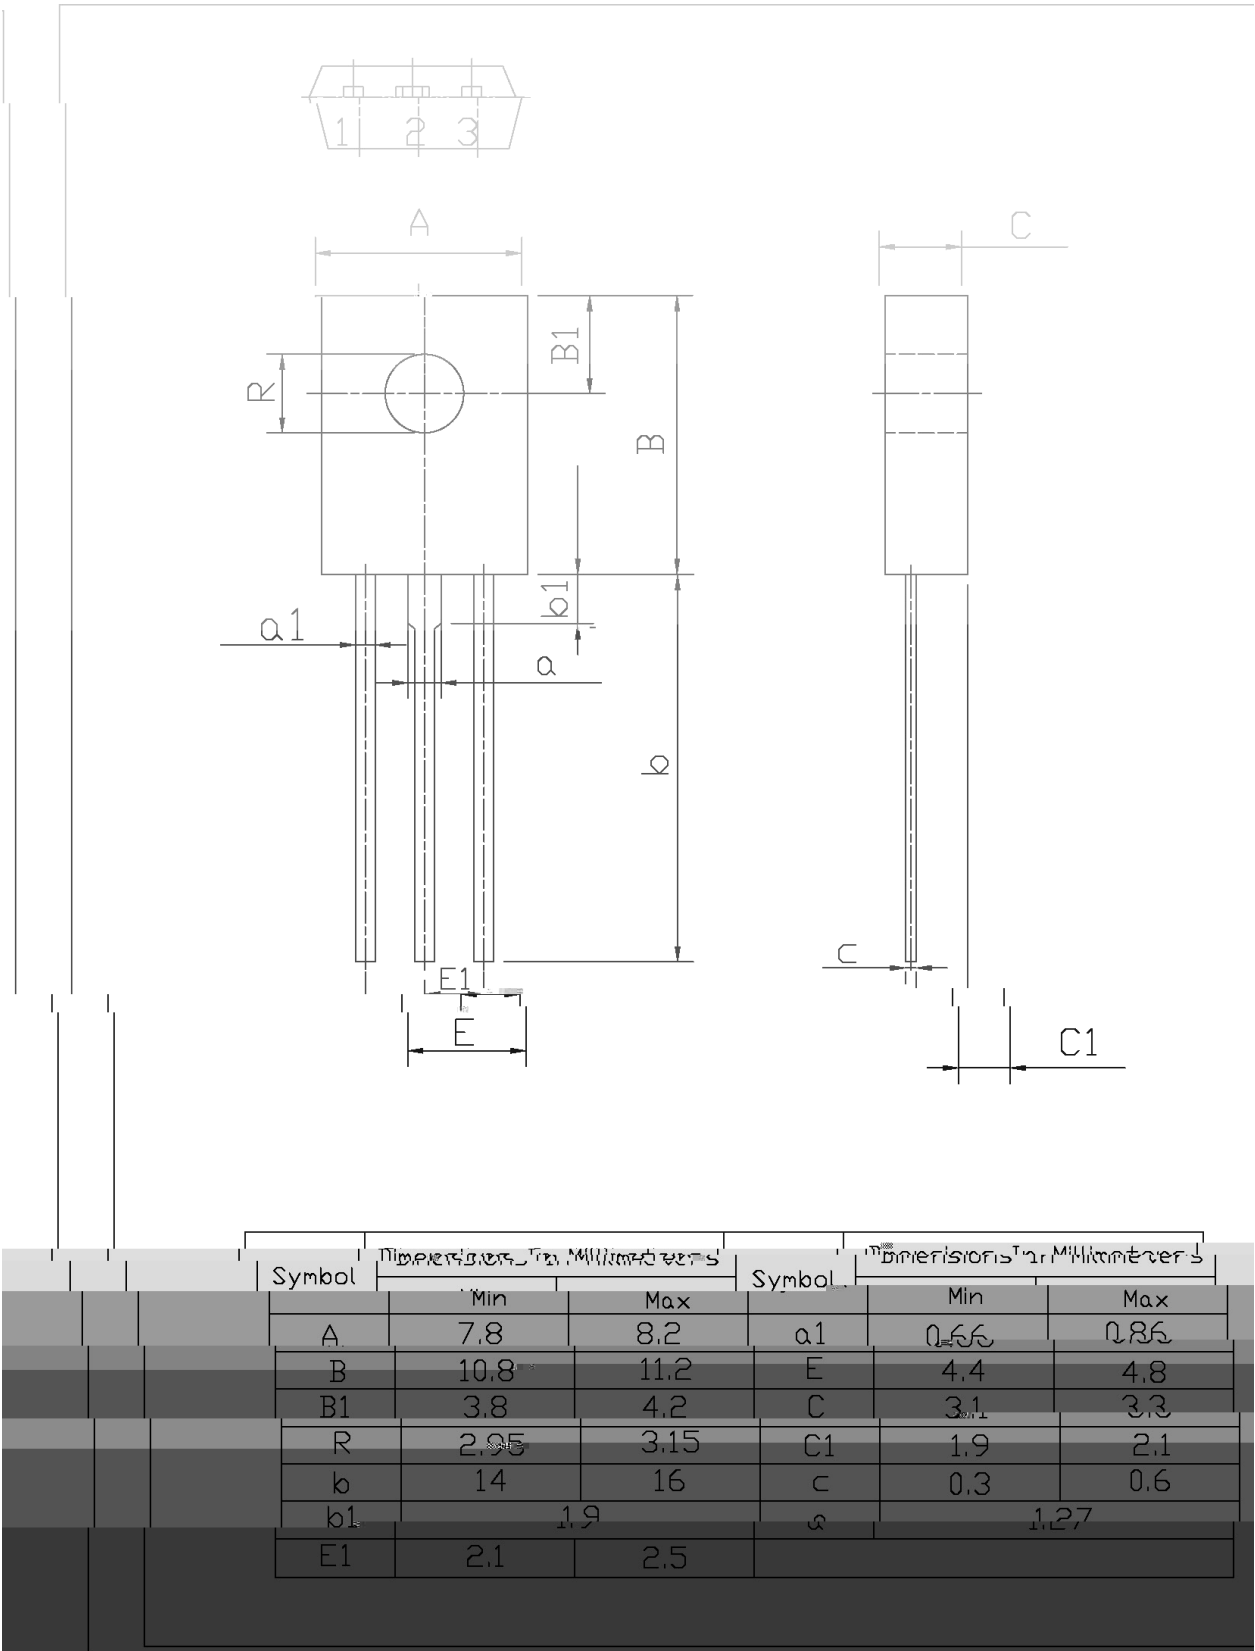

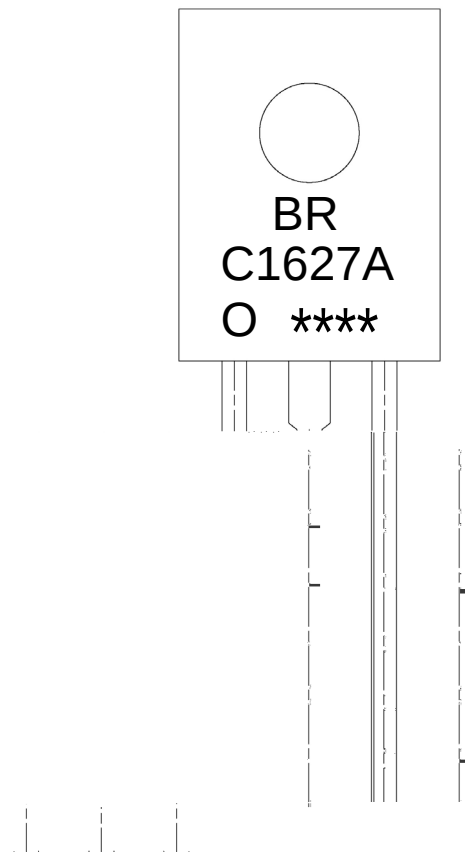

BR

C1627A

O: h_{FE}


Note:

BR: Company Code

C1627A: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

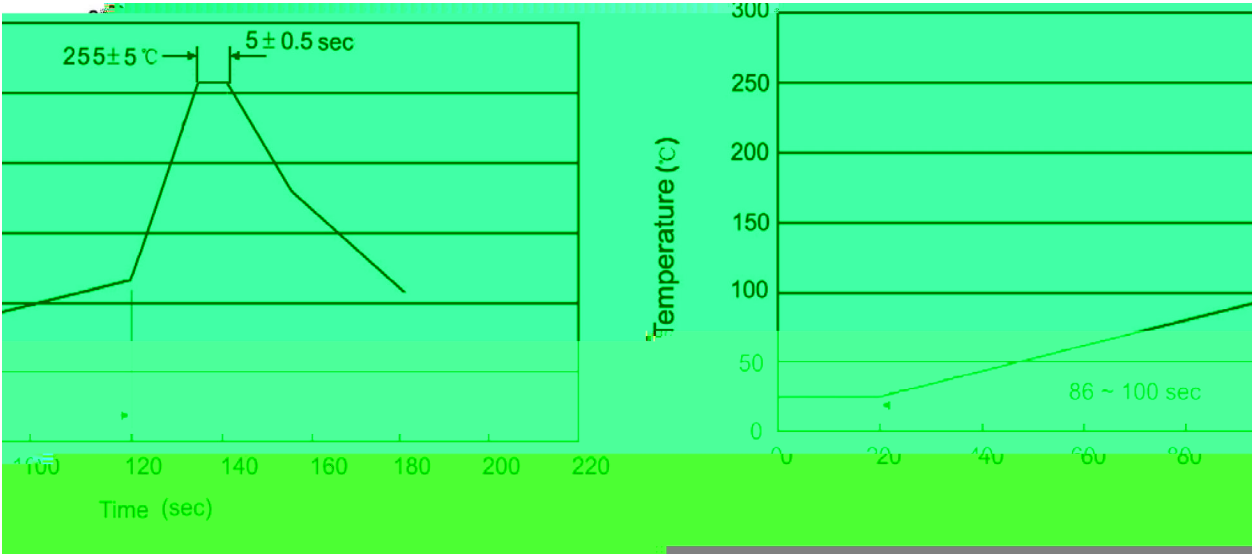

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180