

/ Descriptions

VRW056 MM QSQ æ M ȳ s ll 1


/ Features

I


/ Applications

ȧȧȧ W ȧ ȧȧȧȧ ȧ z

/ Equivalent Circuit



/ Pinning



X

X

X


/ hFE Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

V_{DS}	I_N	V_{GS}	D

/ Electrical Characteristics(Ta=25)


V_{DS}	I_N	f_{T}	ω_{n}	ε_z	ω_z	D
		μ				
		μ				
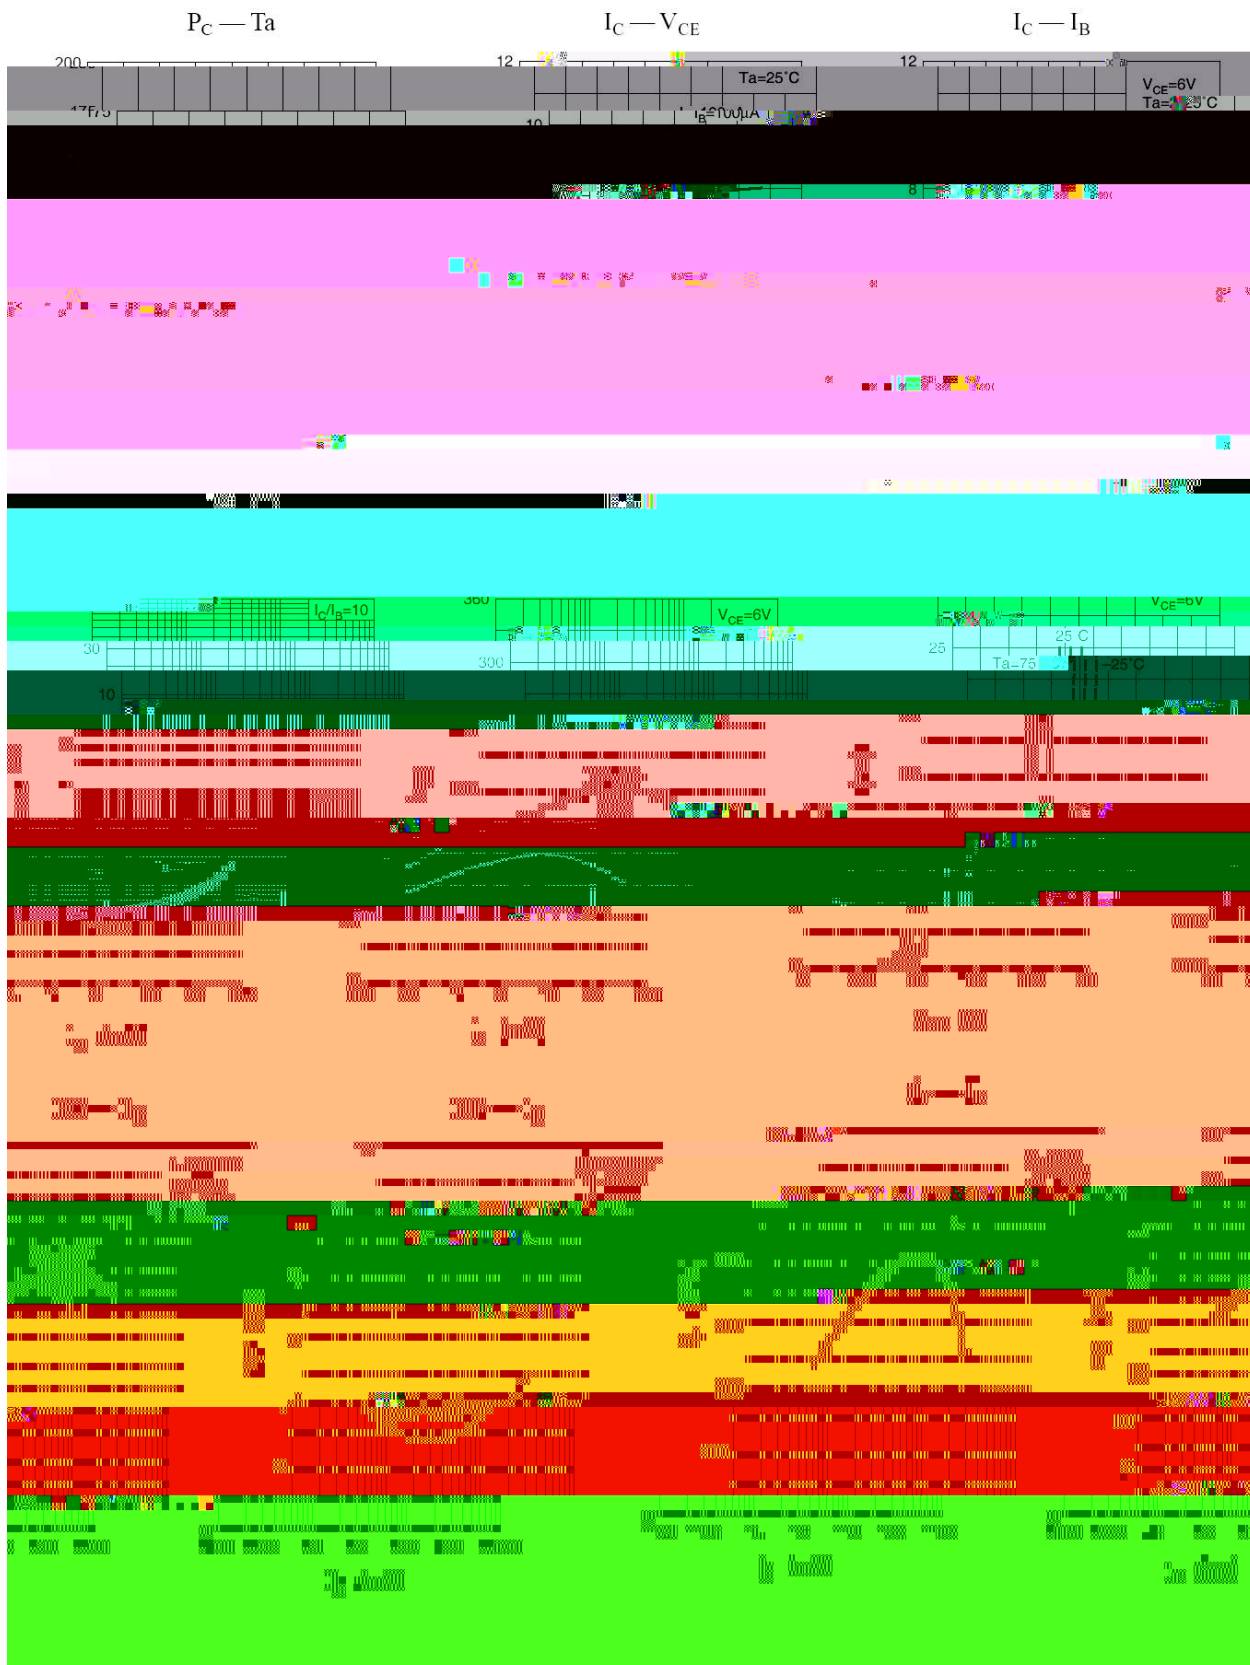
$$P_C - Ta$$


/ Package Dimensions


SOT-23

单位: mm

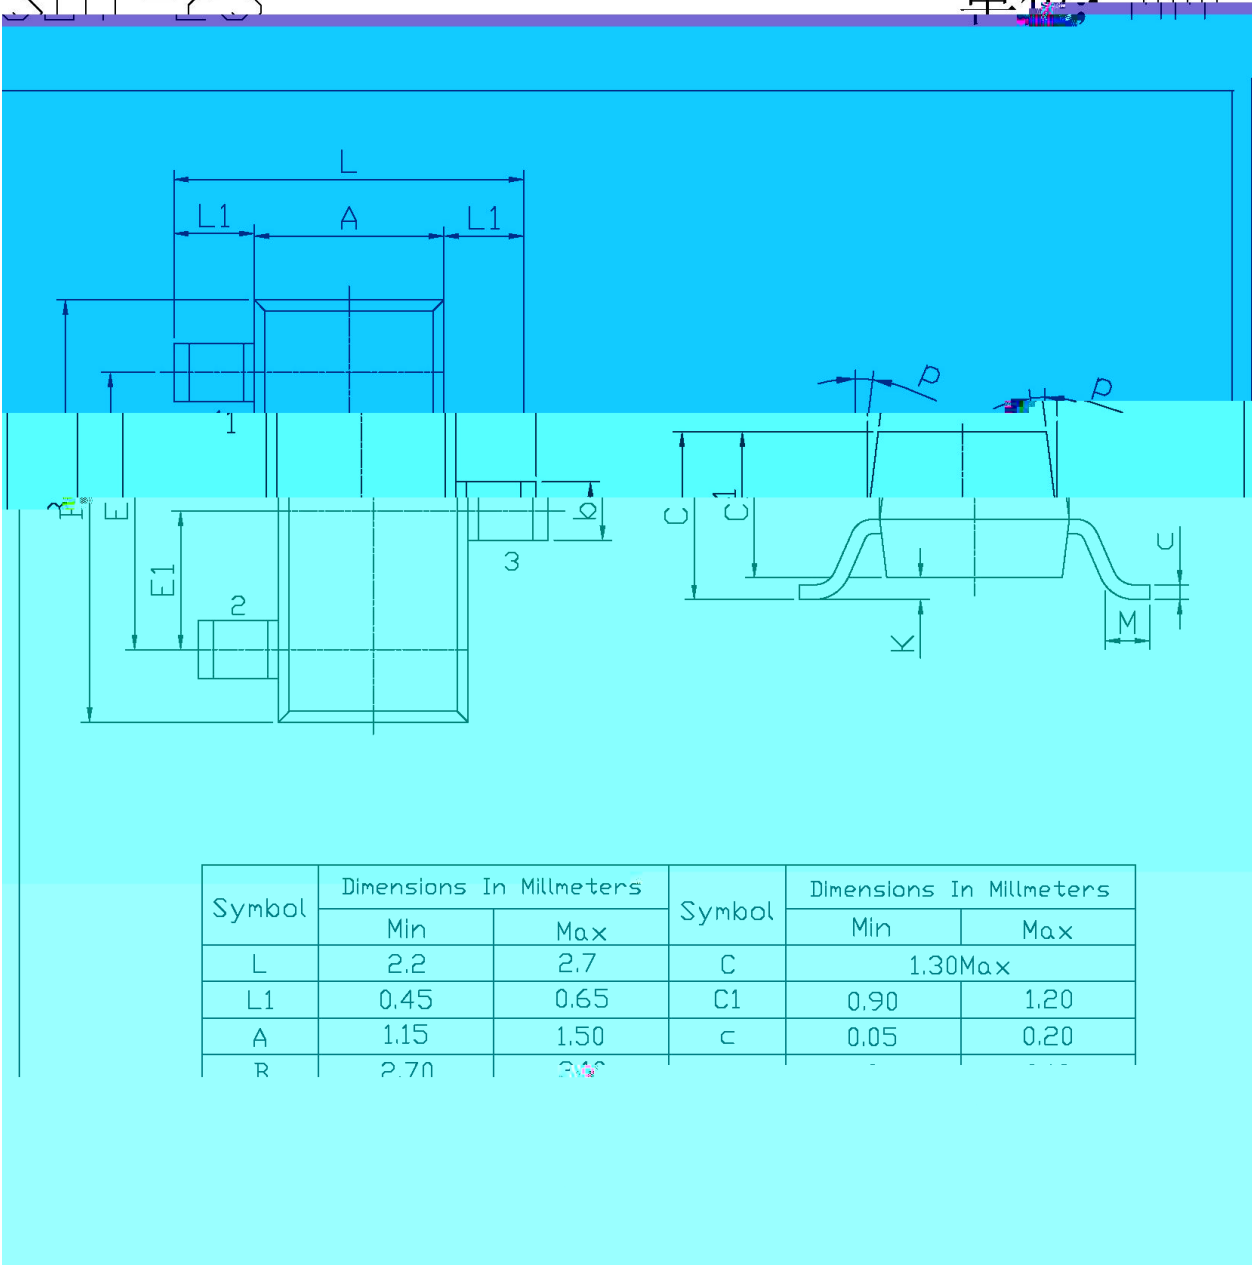


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
R	2.70	3.40			

/ Marking Instructions

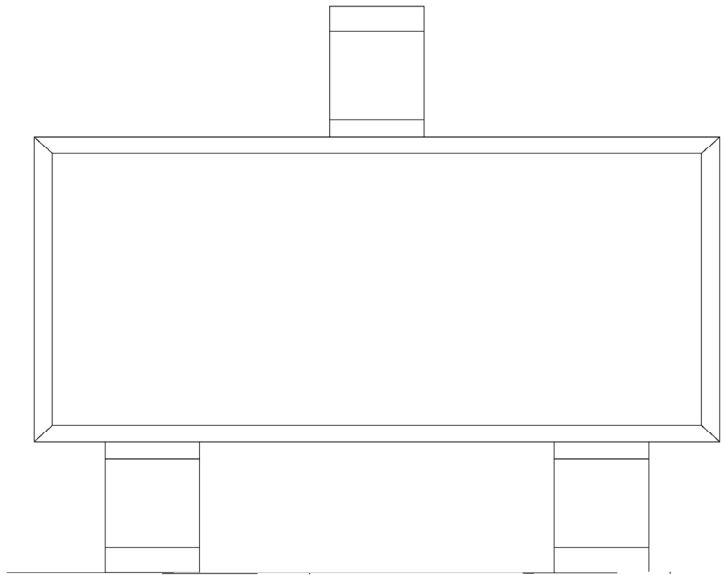

() /

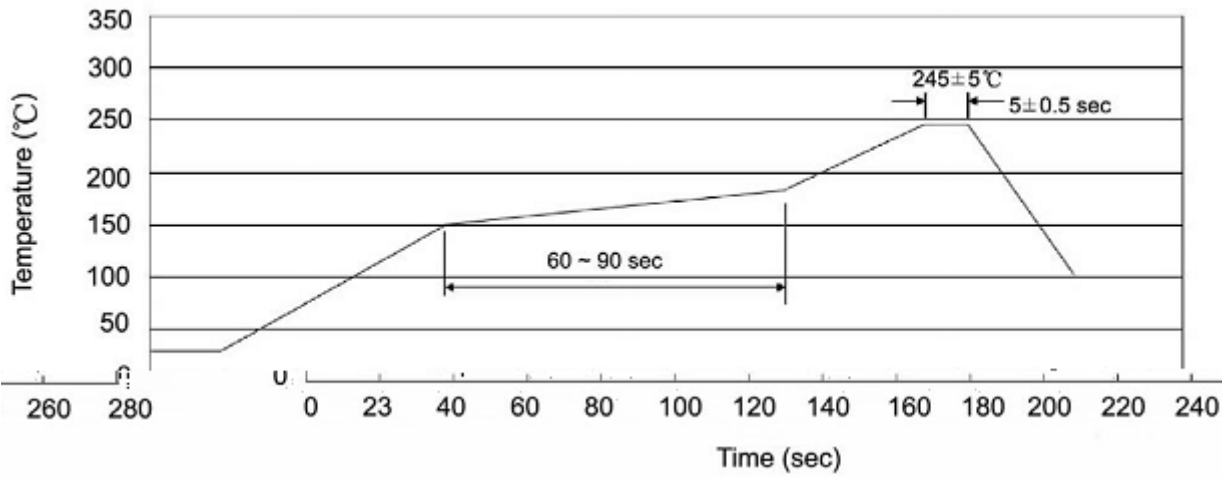

” X
♫ □ ŷ K † i`H K †
Š Œ □ ŷ ° † i`H      `Y ʌ ʌ ° ° † °
i` ʌ, ɔ ŷ ʌ K † †

/ Resistance to Soldering Heat Test Conditions

□ ŷ X ° † `H X °

/ Packaging SPEC.

ɔ` γ

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices