

2SC2411K

/ Descriptions


SOT-23 NPN

/ Features


， ， 2SA1036K

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

			℃
			℃


/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
						μ

/ Electrical Characteristic Curve

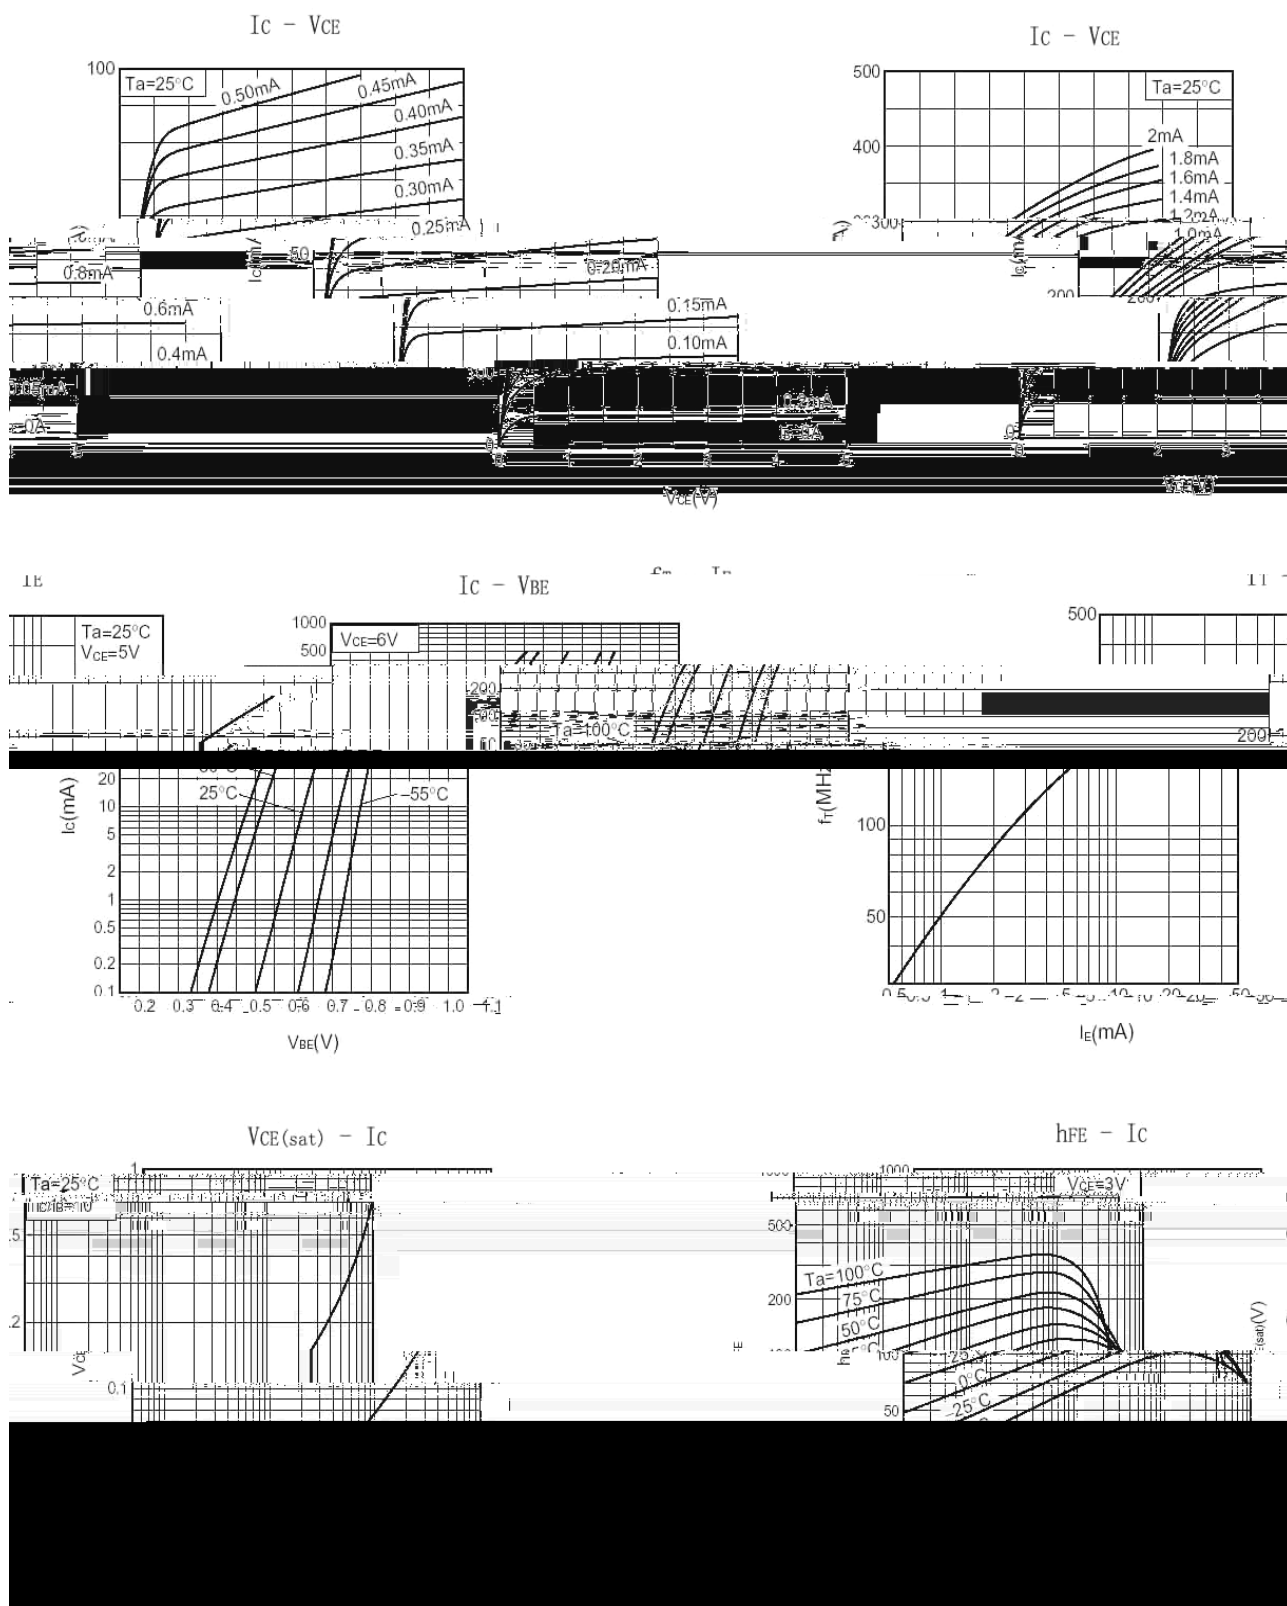


/ Marking Instructions

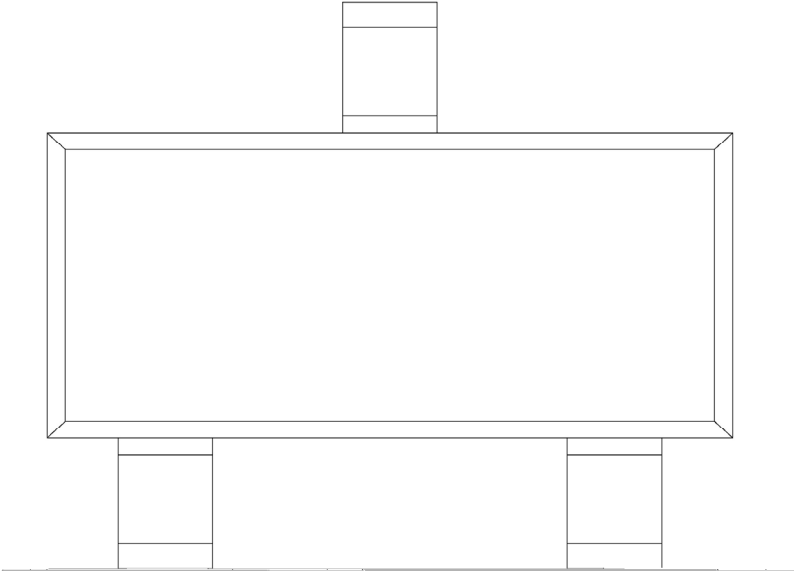

H
C
P

H
C
P

() /

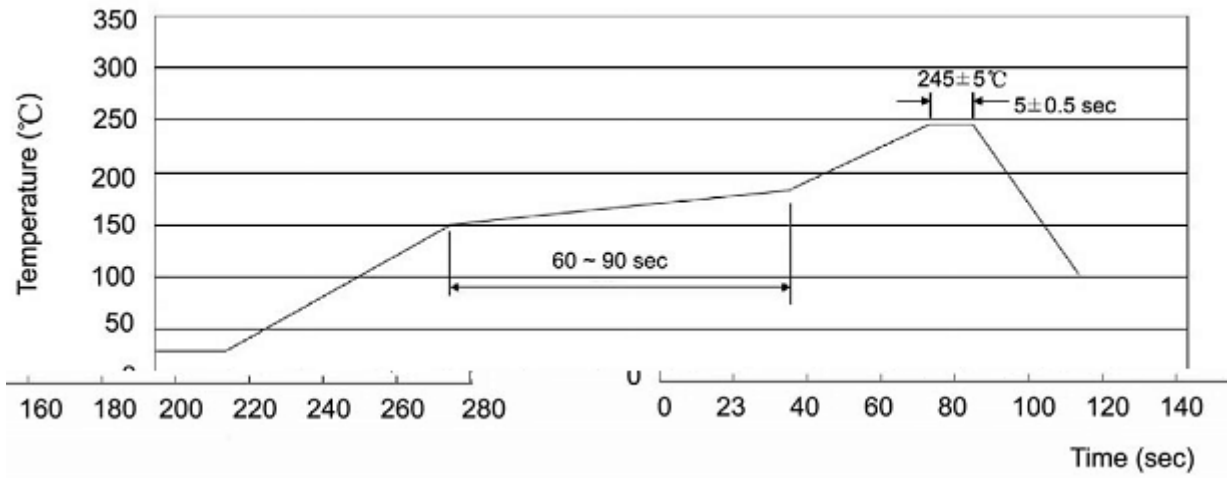 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices