

/ Descriptions

Silicon NPN transistor in a SOT-89 Plastic Package.


/ Features

High f_T , high V_{CEO} , small flat package, complementary pair with 2SA1201A.


/ Applications

Power amplifier applications.

/ Equivalent Circuit



/ Pinning









PIN1 Base PIN 2 Collector PIN 3 Emitter

/ Marking

h_{FE} Classifications Symbol	O	Y
h_{FE} Range	80 160	120 240
Marking	HCO * *	HCY * *

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V		


/ Electrical Characteristic Curve

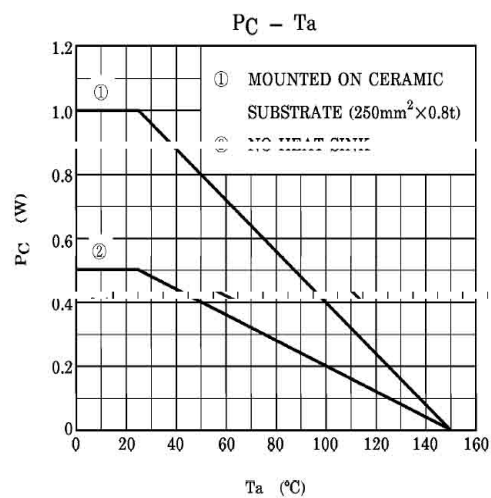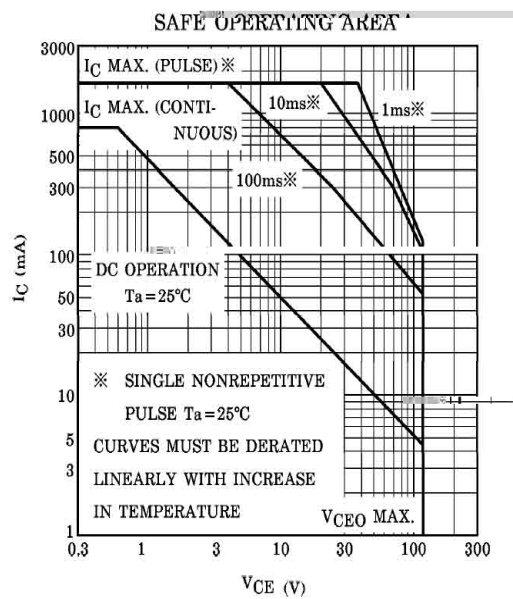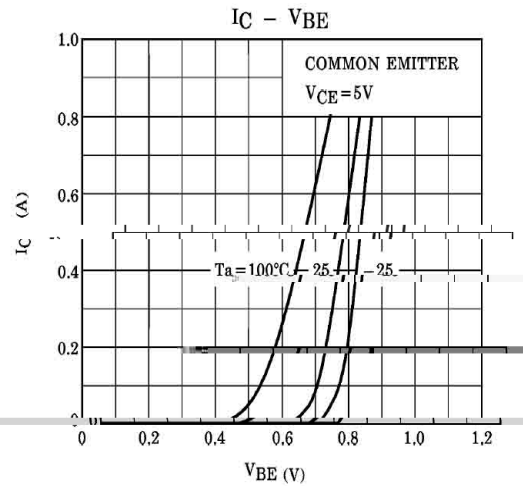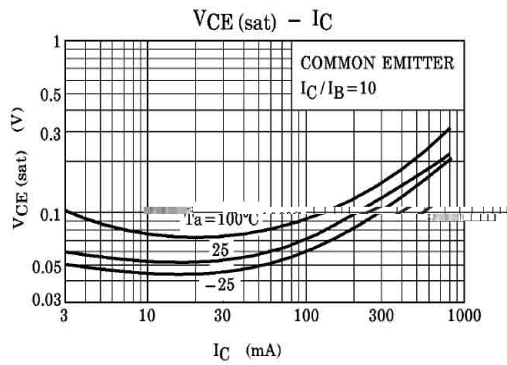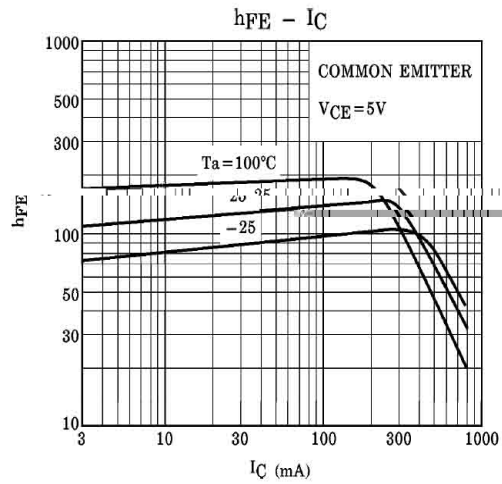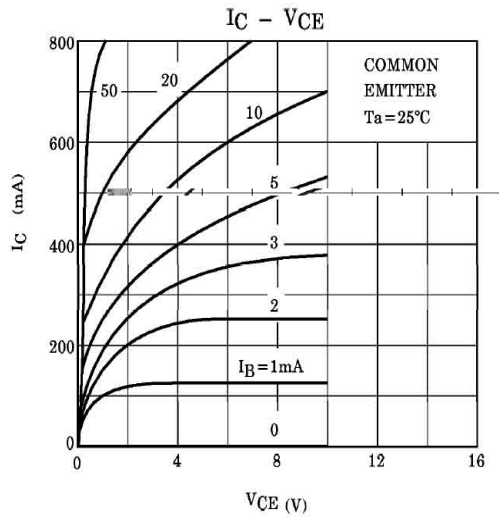


/ Package Dimensions

SOT-89

单位: mm

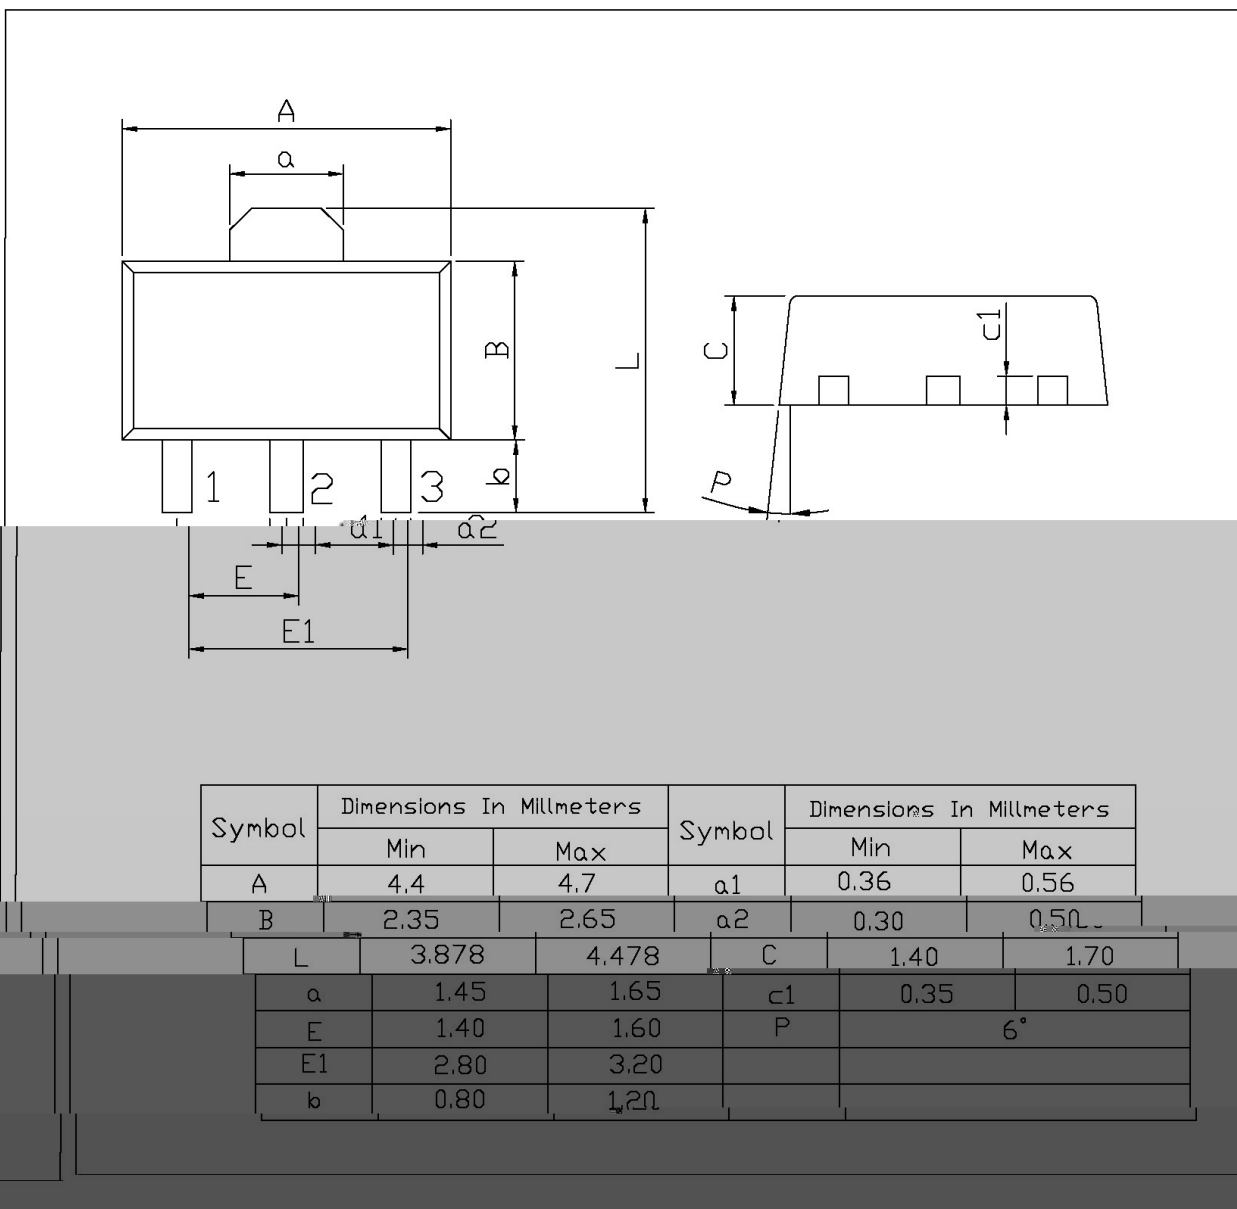

/ Marking Instructions

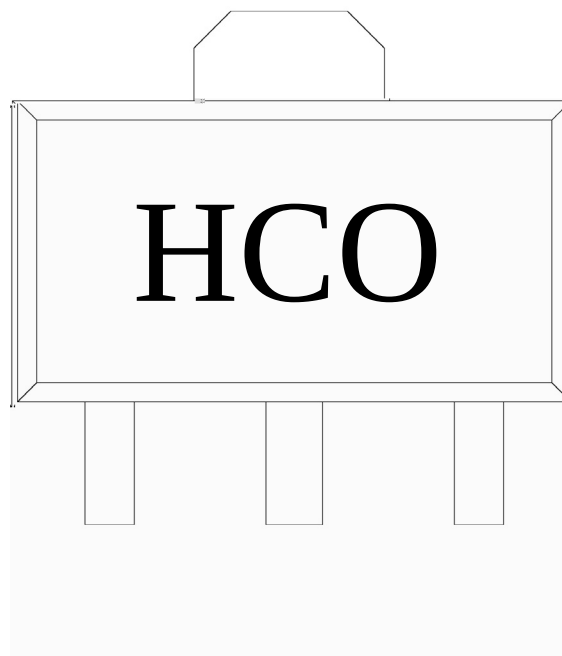

Note:


H: Company Code.

C: Product Type.

O h_{FE} Classifications Symbol

** : Lot No. Code, code change with Lot No.

() /

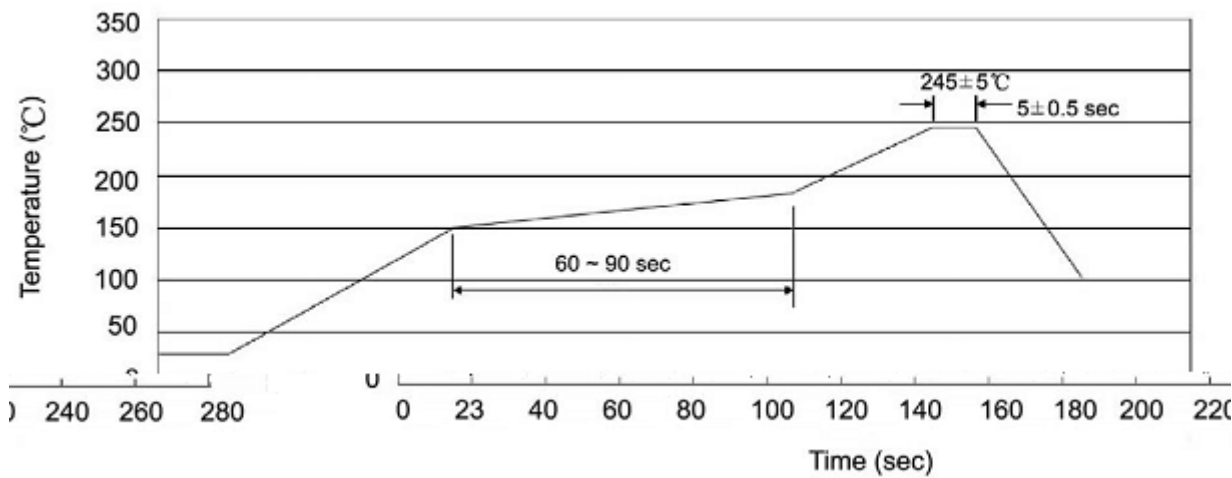

Note:

- 1

25 150

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10 /sec.
- 1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices