



/ Descriptions

WR0553I QSQ

/ Features

/

/ Applications**/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
		~	℃


/ Electrical Characteristics(Ta=25)

						μ
						μ


Electrical Characteristic Curve

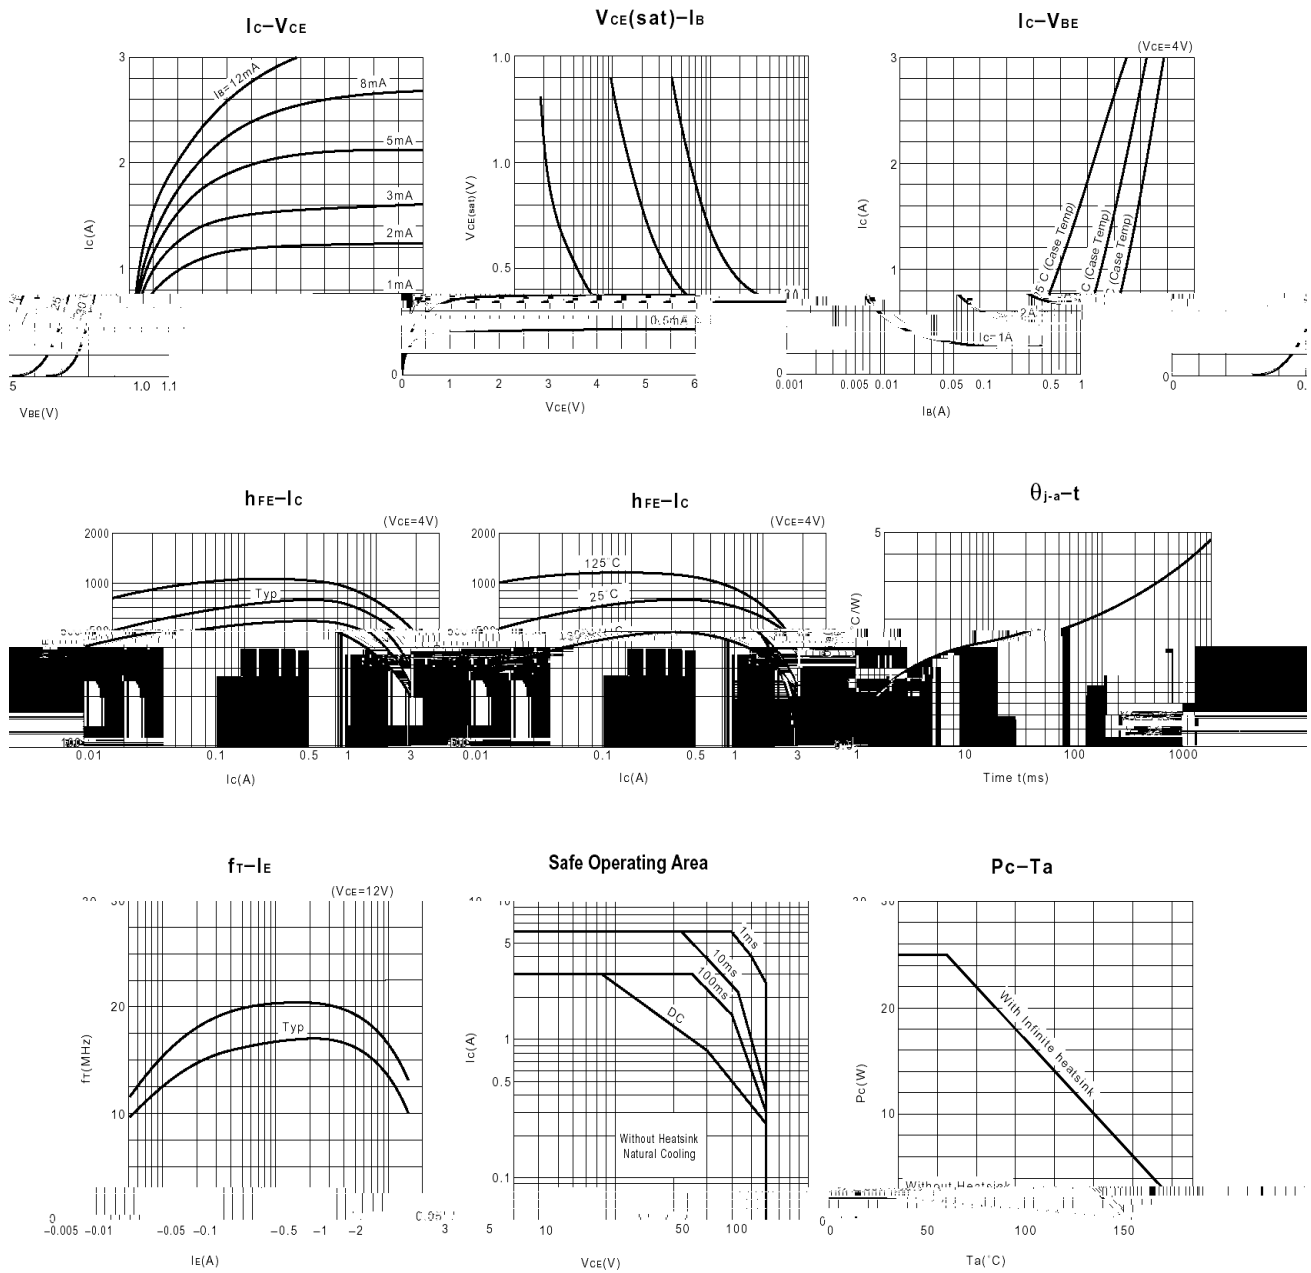

/ Package Dimensions

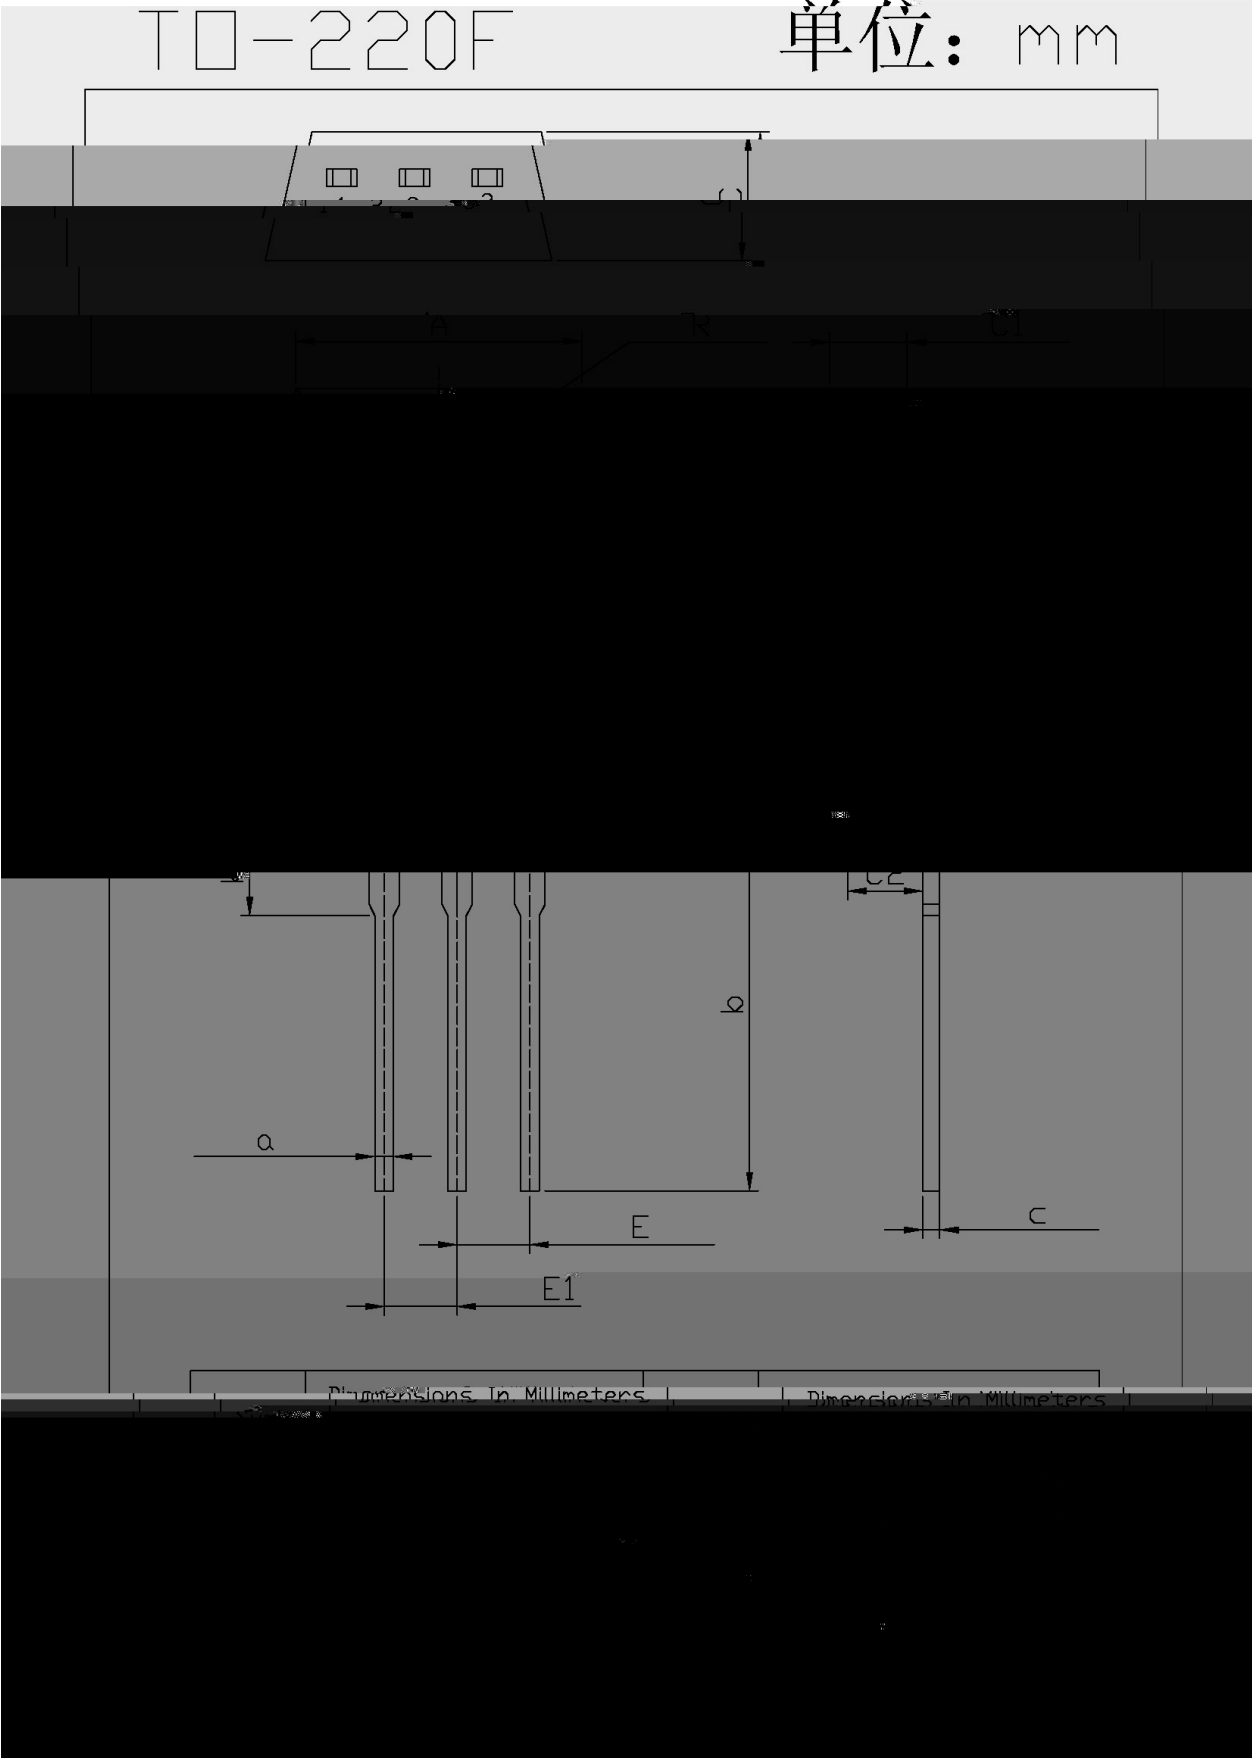


/ Marking Instructions

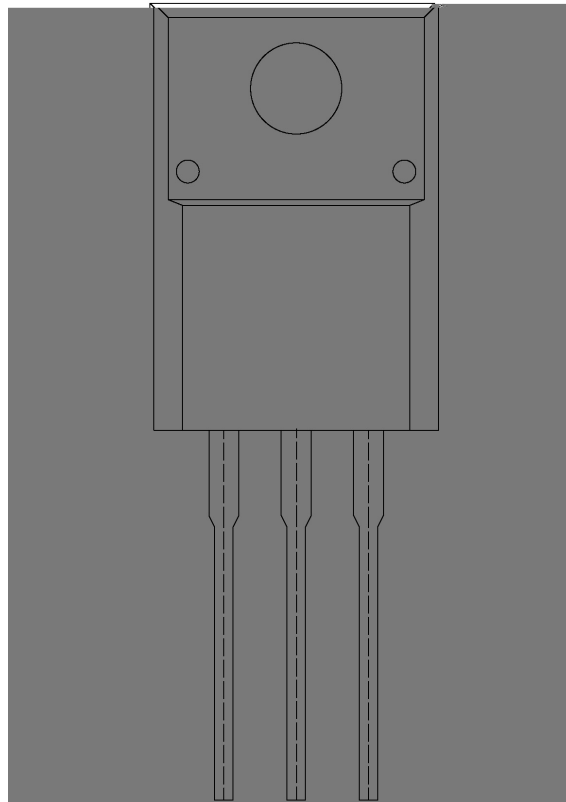

EU
F6;85

() / Temperature Profile for Dip Soldering(Pb-Free)

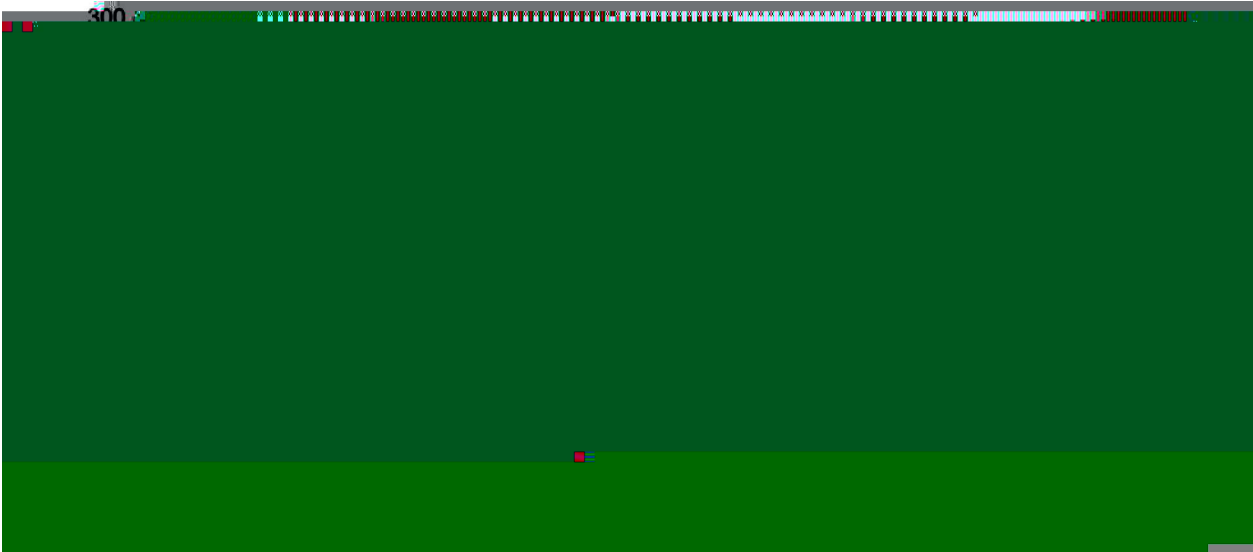

$\frac{3}{8}$ $\frac{3}{8}$
2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2
 $\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2 °C

/ Packaging SPEC.

/ Notices