

2SC4081W


/ Descriptions

SOT-323 NPN

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

/ Absolute Maximum Ratings(Ta=25 –)


/ Electrical Characteristics(Ta=25 –)

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

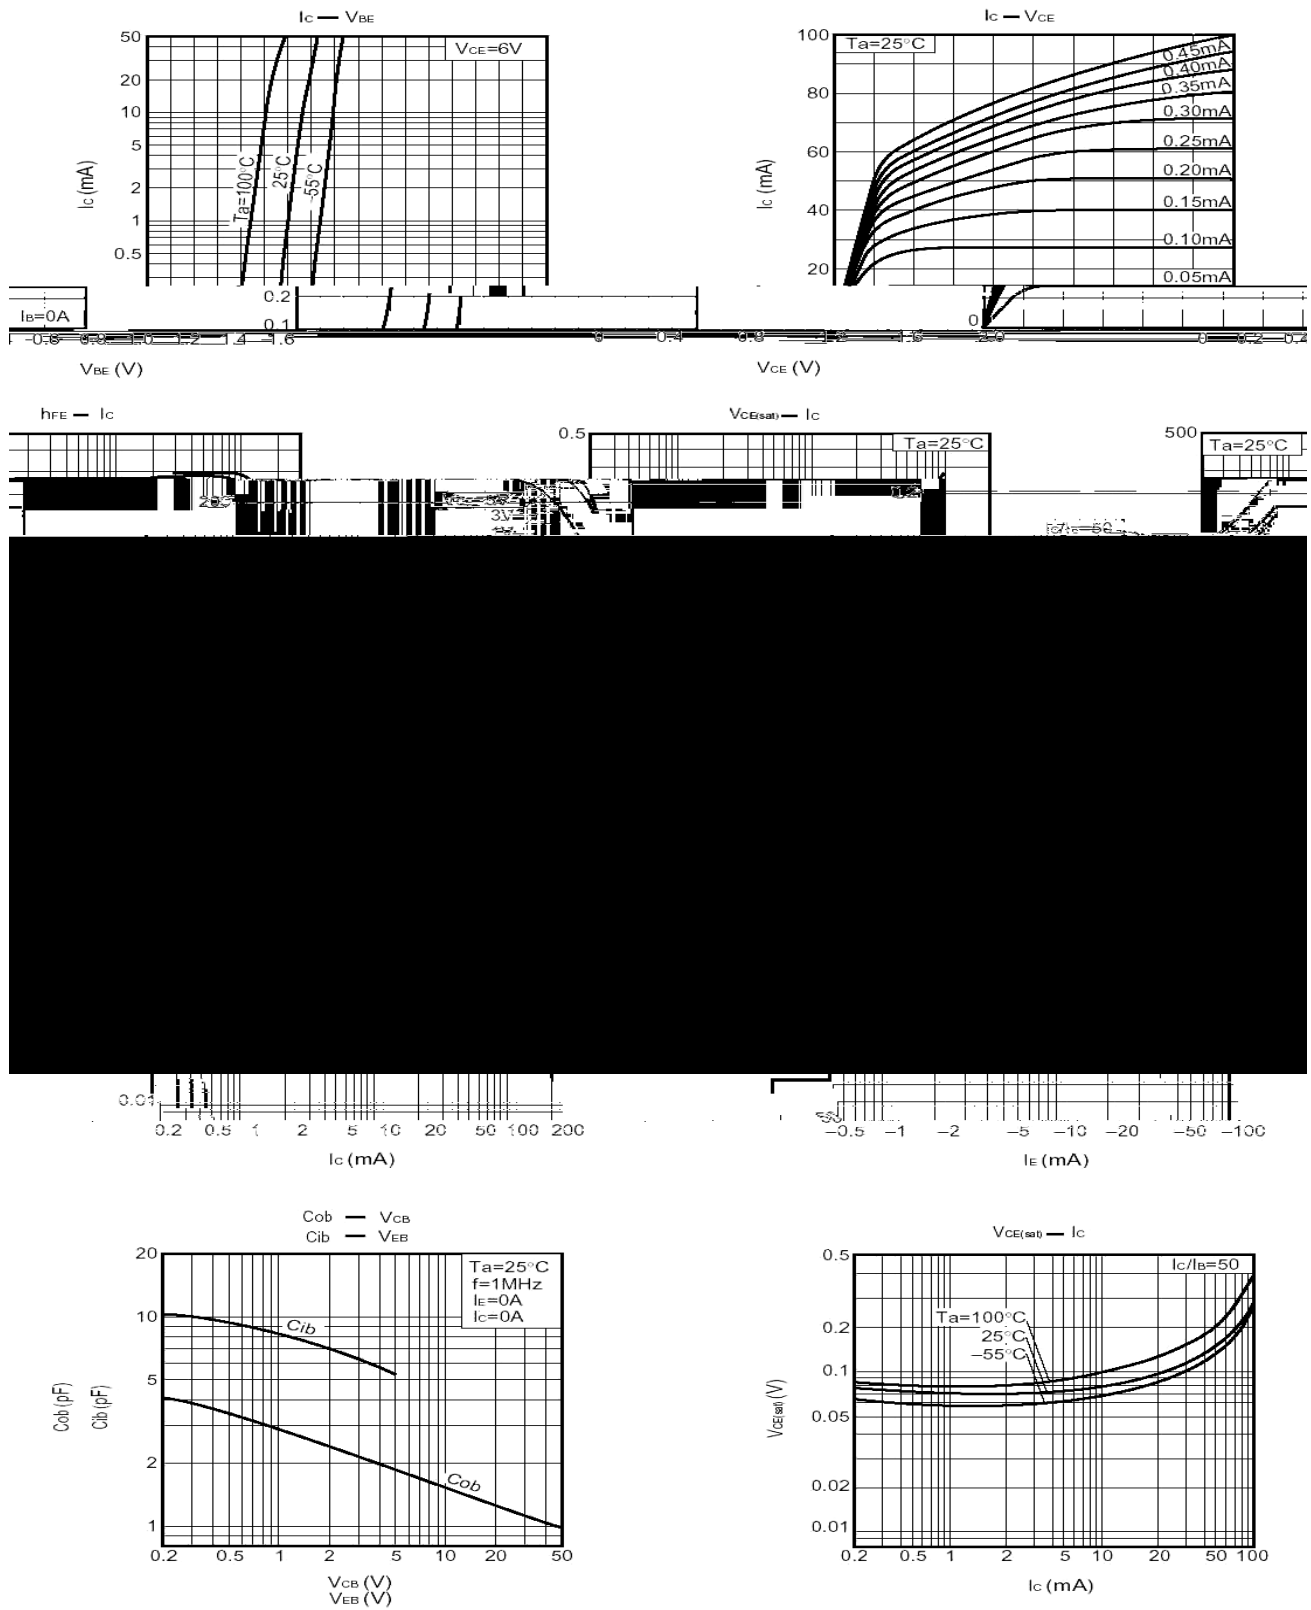

/ Package Dimensions




/ Marking Instructions

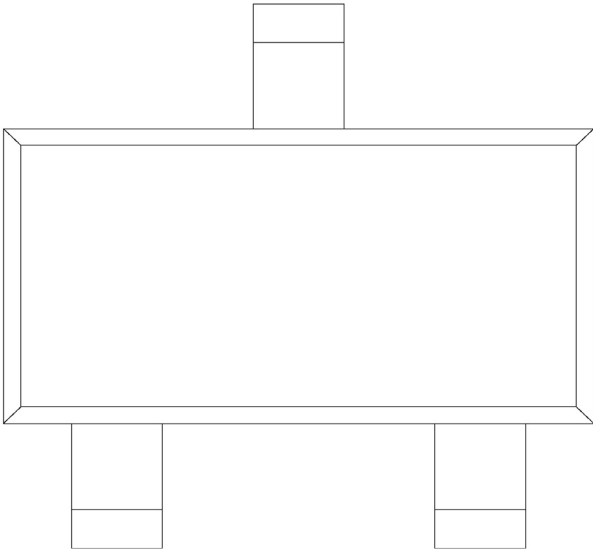

H
B
Q

h_{FE}

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

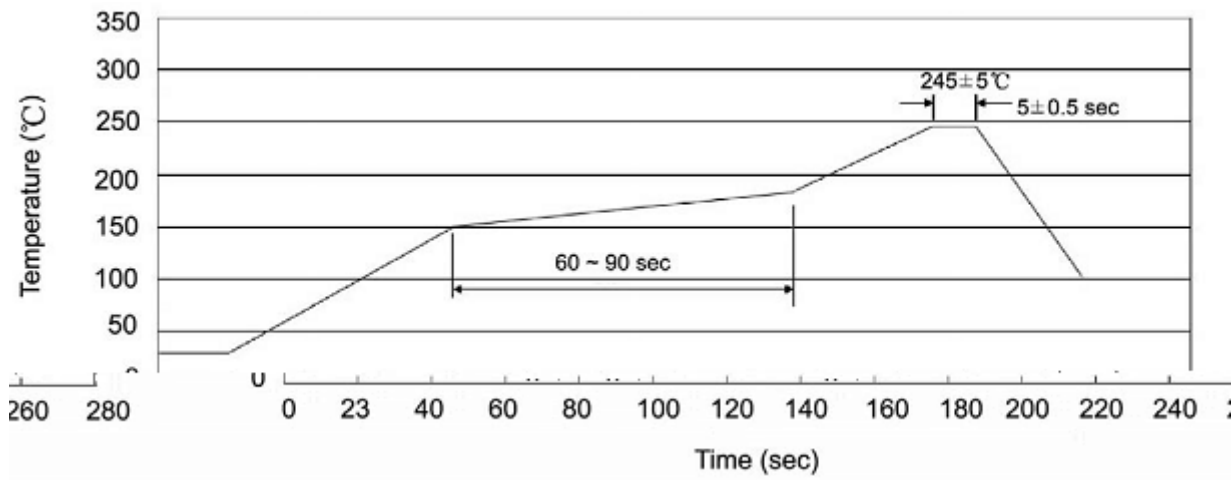

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices