

1. 1 / Descriptions

SOT-323 NPN Silicon NPN transistor in a SOT-323 Plastic Package.


2. 2 / Features

- $V_{ce(sat)}=0.3V_{max}$
Collector to emitter saturation voltage $V_{ce(sat)}=0.3V_{max}$ Excellent lineality of DC forward current gain, Supper mini package for easy mounting.


3. 3 / Applications

For hybrid IC, small type machine low frequency voltage amplify application.

4. 4 / Equivalent Circuit



5. 5 / Pinning



PIN1 Emitter PIN 2 Base PIN 3 Collector


6. 6 / Marking

h_{FE} Classifications Symbol	Q	R	S	T
h_{FE} Range	120~270	180~390	270~560	390~820
Marking	HQH	HRH	HHS	HHT

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	50	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	6	V
Collector Current - Continuous	I_C	2SC4155 0.1	A
		2SC4155A 0.2	
Collector Power Dissipation	P_C	150	mW
Junction Temperature	T_j	125	°C
Storage Temperature Range	T_{stg}	-55~150	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=0.1mA$ $R_{BE}=\infty$	50			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=50V$ $I_E=0$			0.5	μA
					0.1	
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=4V$ $I_C=0$			0.1	μA


电气特性 / Electrical Characteristic Curve

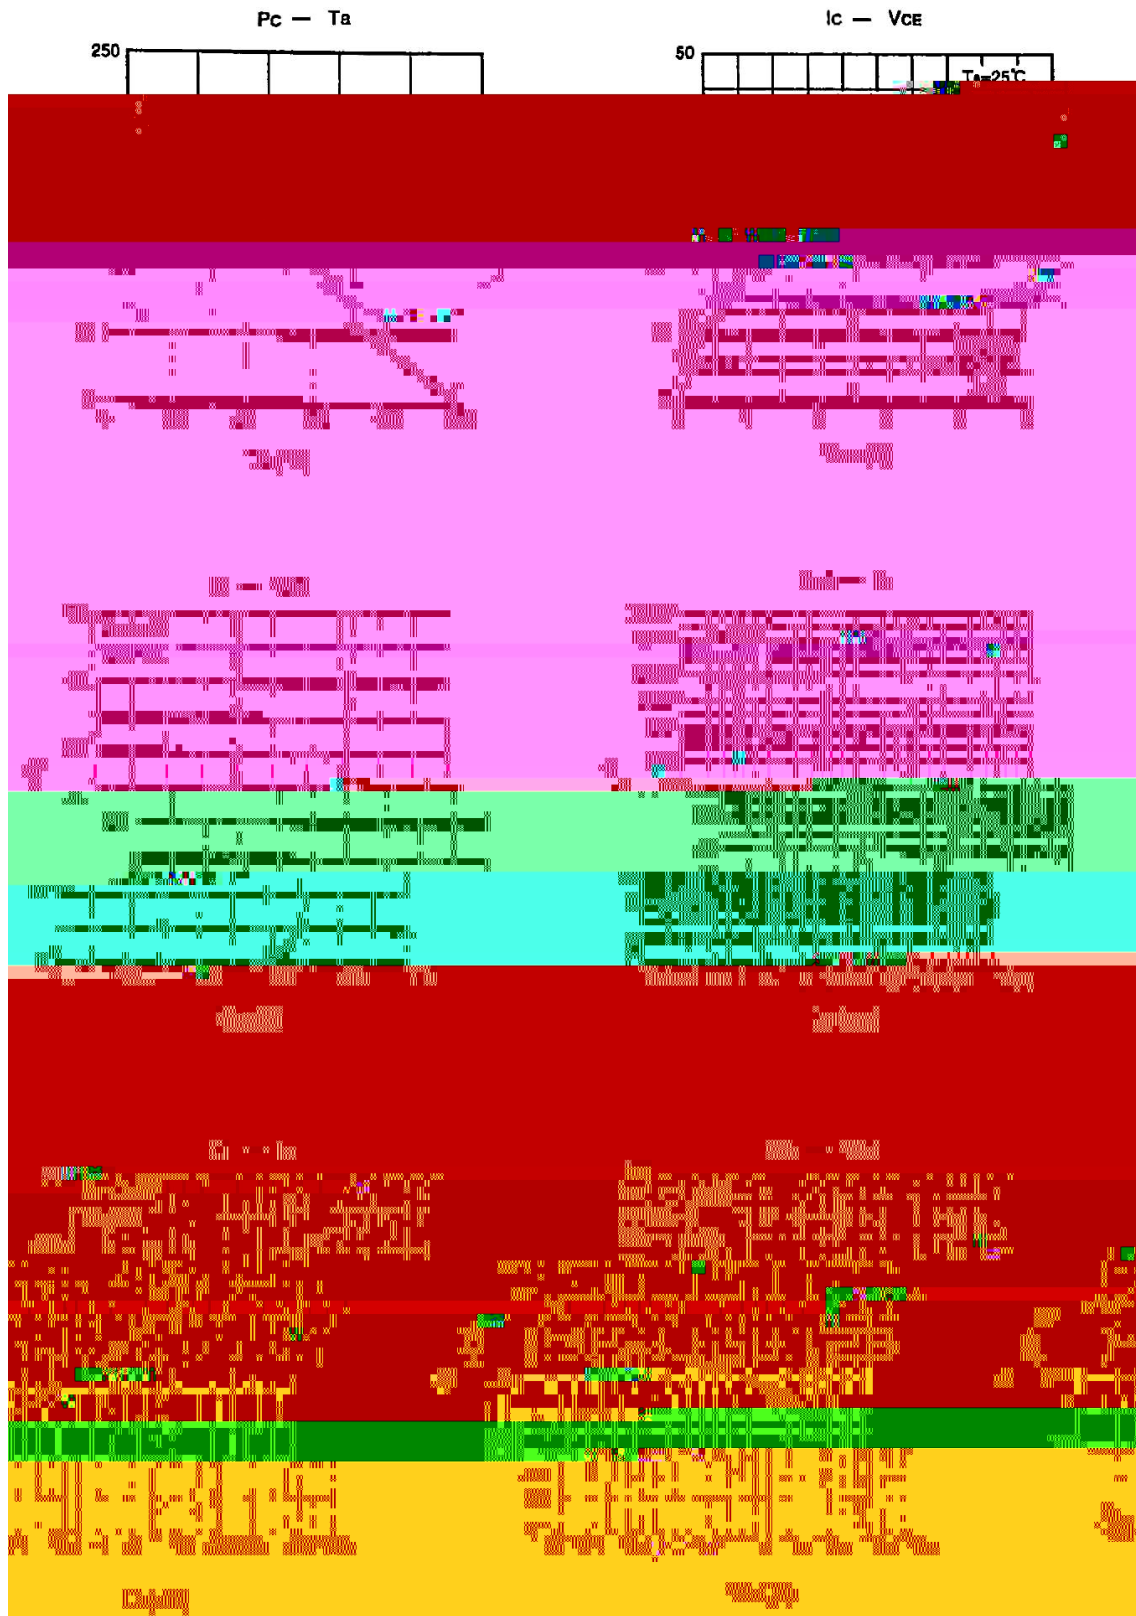

⌘ È Ò Ì ¢ / Package Dimensions


SOT-323

单位：mm

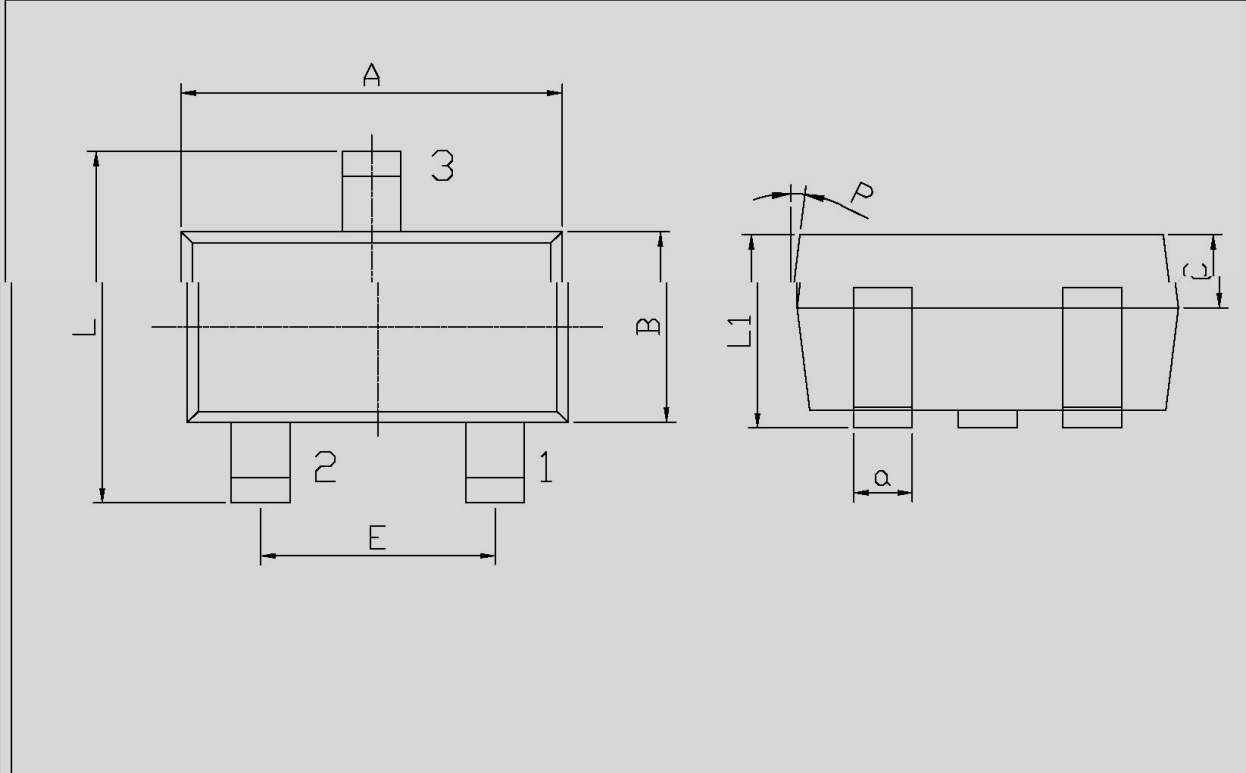

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	1.95	2.35	C	0.30	0.50
L	2.00	2.2	L1	0.85	1.15
E	1.20	1.40	a	0.20	0.40
R	1.15	1.35	P		7°

4. 标记 / Marking Instructions

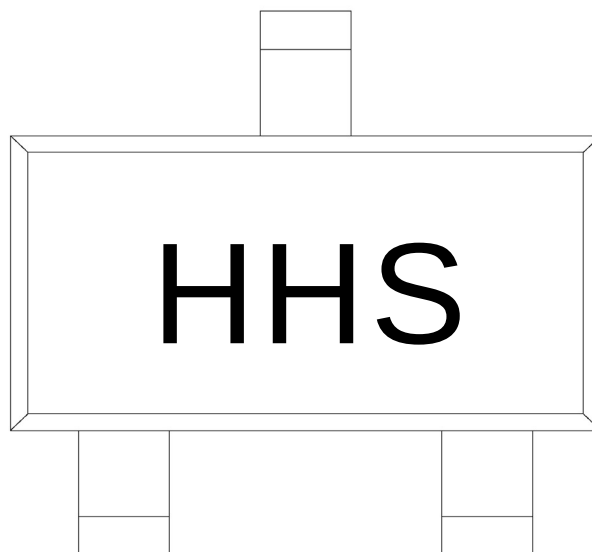

H

H

S h_{FE}


Note:

H: Company Code.

H: Product Type.

S: h_{FE} Classifications Symbol

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

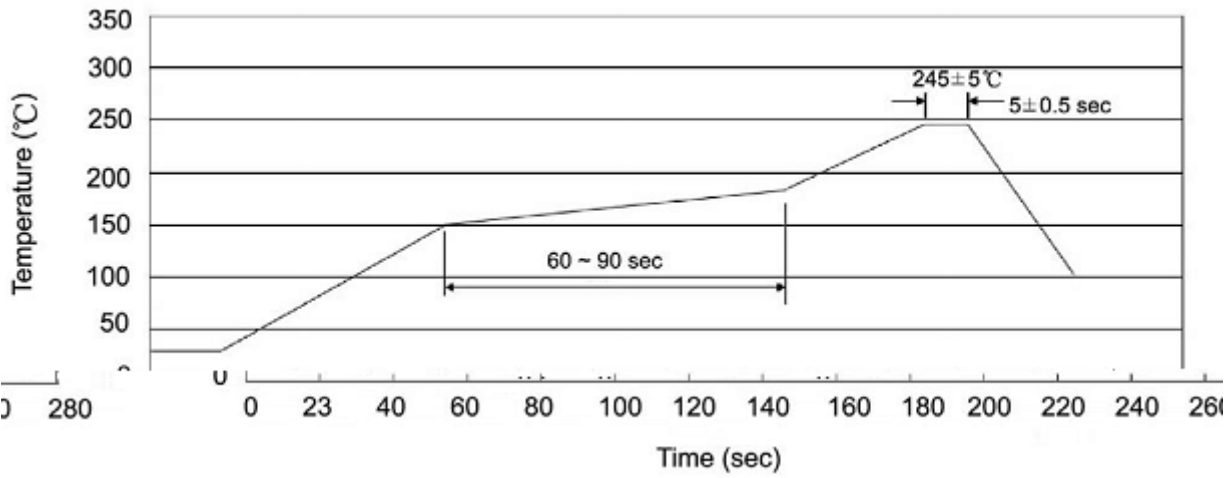

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5℃ Time:10±1 sec

Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Uni /Reel 只/卷盘	Reel /Inner Bos 卷盘/盒	Uni /Inner Bo 只/盒	Inner Bos /O er Bo 盒/箱	Uni /O er Bo 只/箱	Reel 尺寸	Inner Bos 盒	O xer Bo 箱
SOT-323	3,000	10	30,000	8	240,000	7" ×8	180×120×180	385×257×392

Notices