


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ
		Ω				μ
						μ

/ Electrical Characteristic Curve

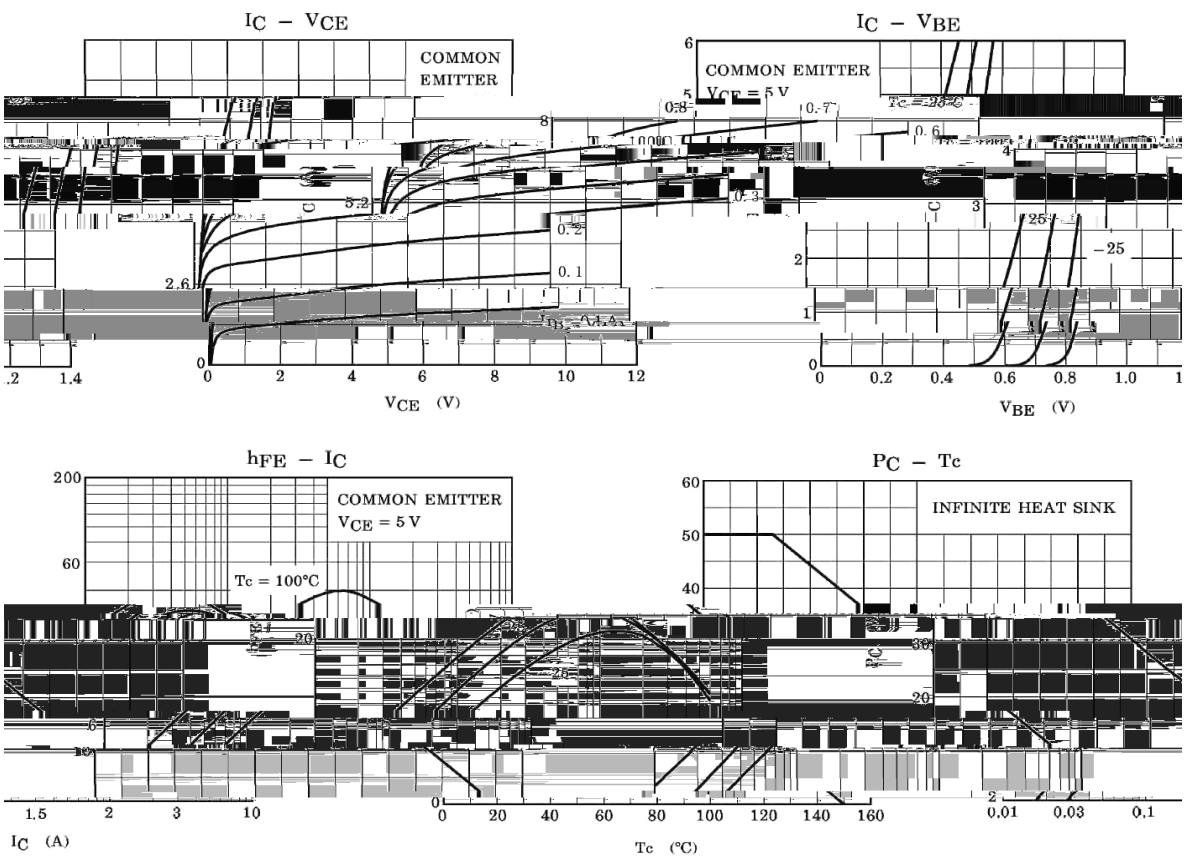


/ Package Dimensions

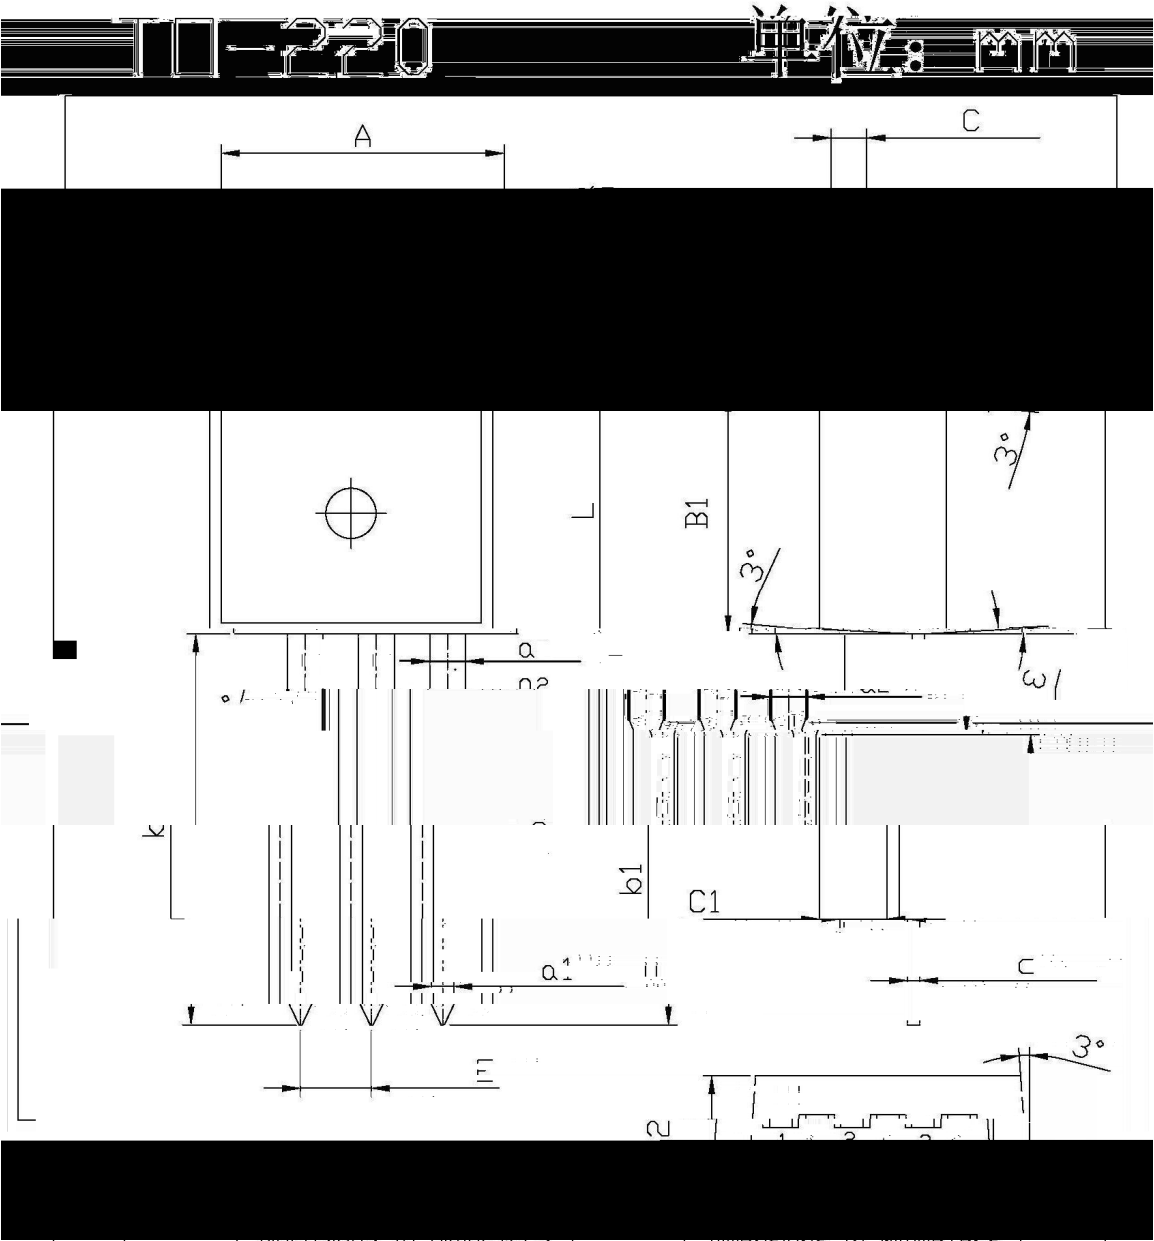


Symbol	Dimensions in millimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
A	9.8	10.2	C	1.2	1.4
B1	9.0	9.4	C1	6.3	6.7
a	0.4	0.6	a1	0.2	0.25
b1	0.2	0.25	k	0.1	0.15

/ Marking Instructions

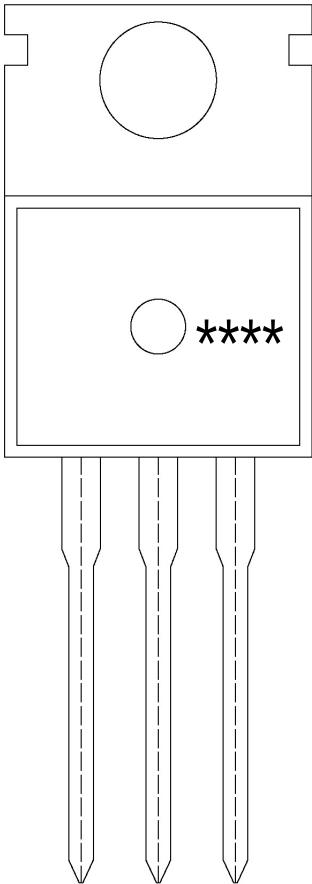

() / Temperature Profile for Dip Soldering(Pb-Free)

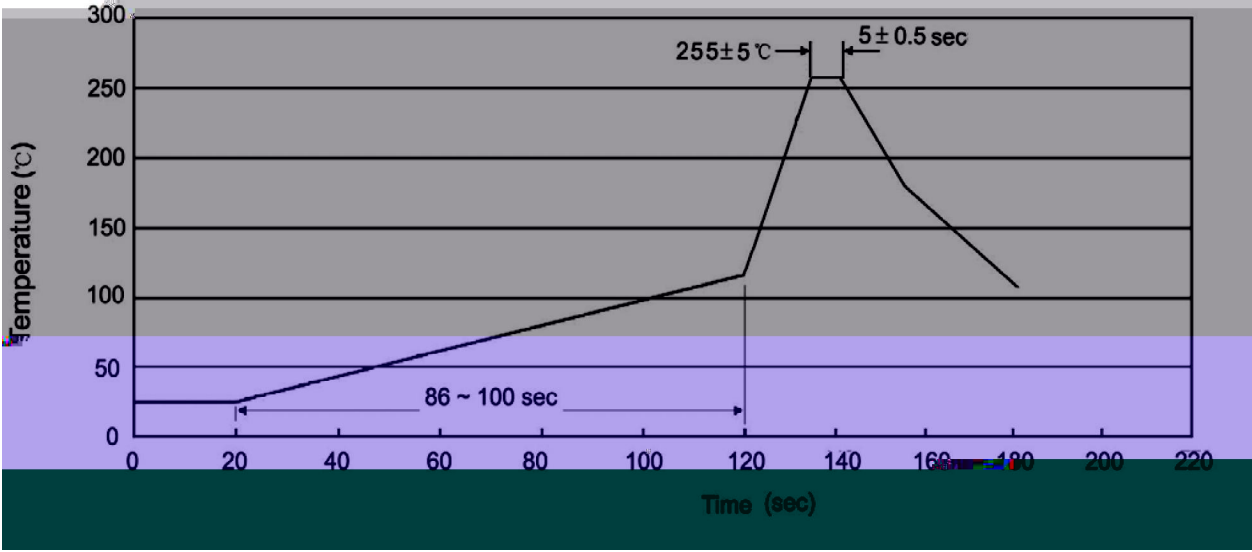

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量				包装尺寸	:
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Innn904 tk44 tte50Ou4 tte4n		