



Rev.E Mar.-2016



Silicon NPN transistor in a TO-92LM Plastic Package.




Low V_1



Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	32	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current (DC)	I_C	2.0	A
Collector Current (Pulse)	I_{CP}	2.5	A
Collector Power Dissipation	P_C	1.0	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 150	°C


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=50\text{ A}$ $I_B=0$	40			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1.0\text{mA}$ $I_B=0$	32			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=50\text{ A}$ $I_C=0$	5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=20\text{V}$ $I_E=0$			1.0	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=4.0\text{V}$ $I_C=0$			1.0	A
DC Current Gain	h_{FE}	$V_{CE}=3.0\text{V}$ $I_C=0.5\text{A}$	120		390	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2.0\text{A}$ $I_B=0.2\text{A}$		0.5	0.8	V
Transition Frequency	f_T	$V_{CE}=5.0\text{V}$ $f=100\text{MHz}$ $I_C=50\text{mA}$		100		MHz
Collector output capacitance	C_{ob}	$V_{CB}=10\text{V}$ $f=1.0\text{MHz}$ $I_E=0$		30		pF




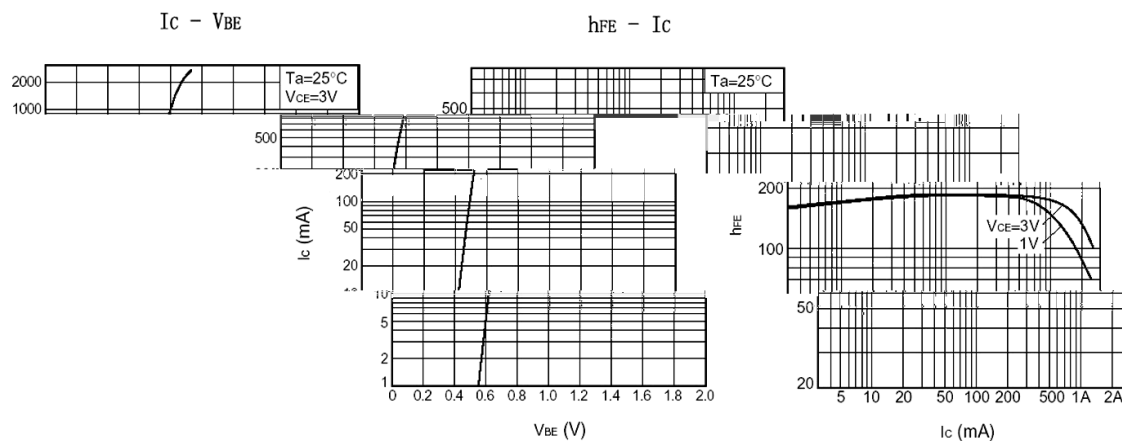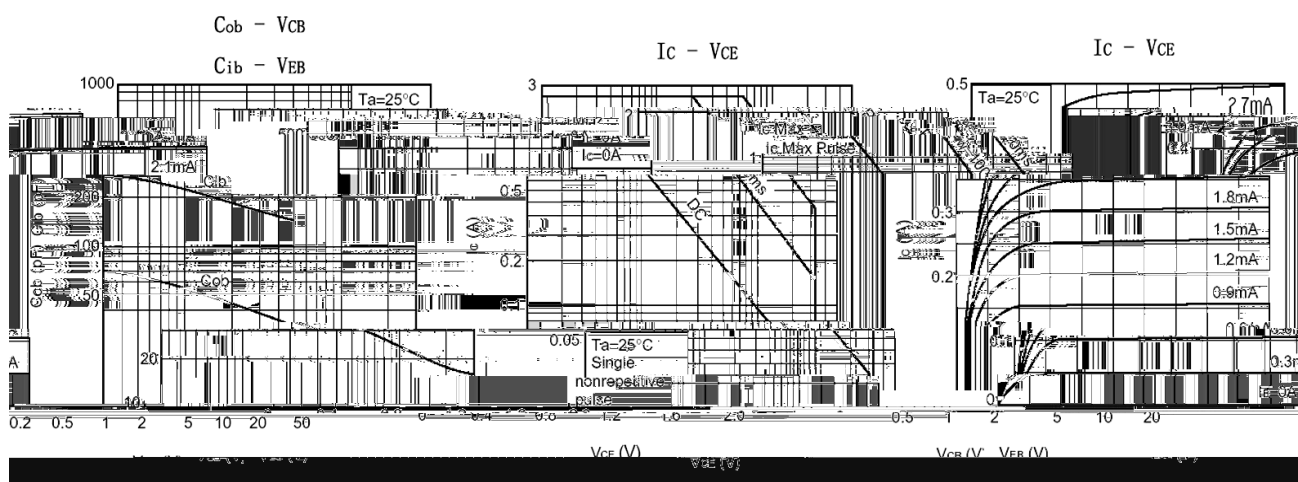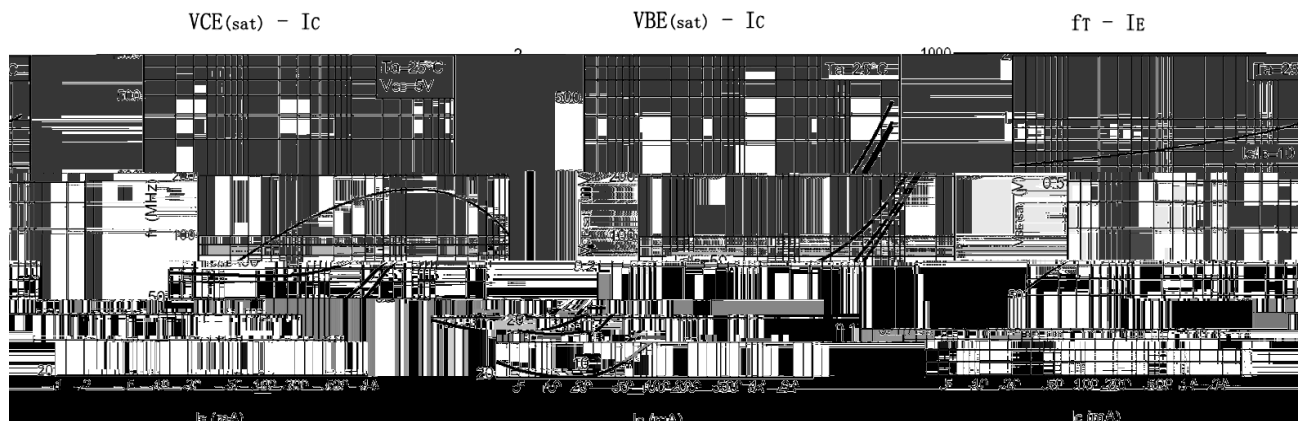

TO-92LM

Unit: mm

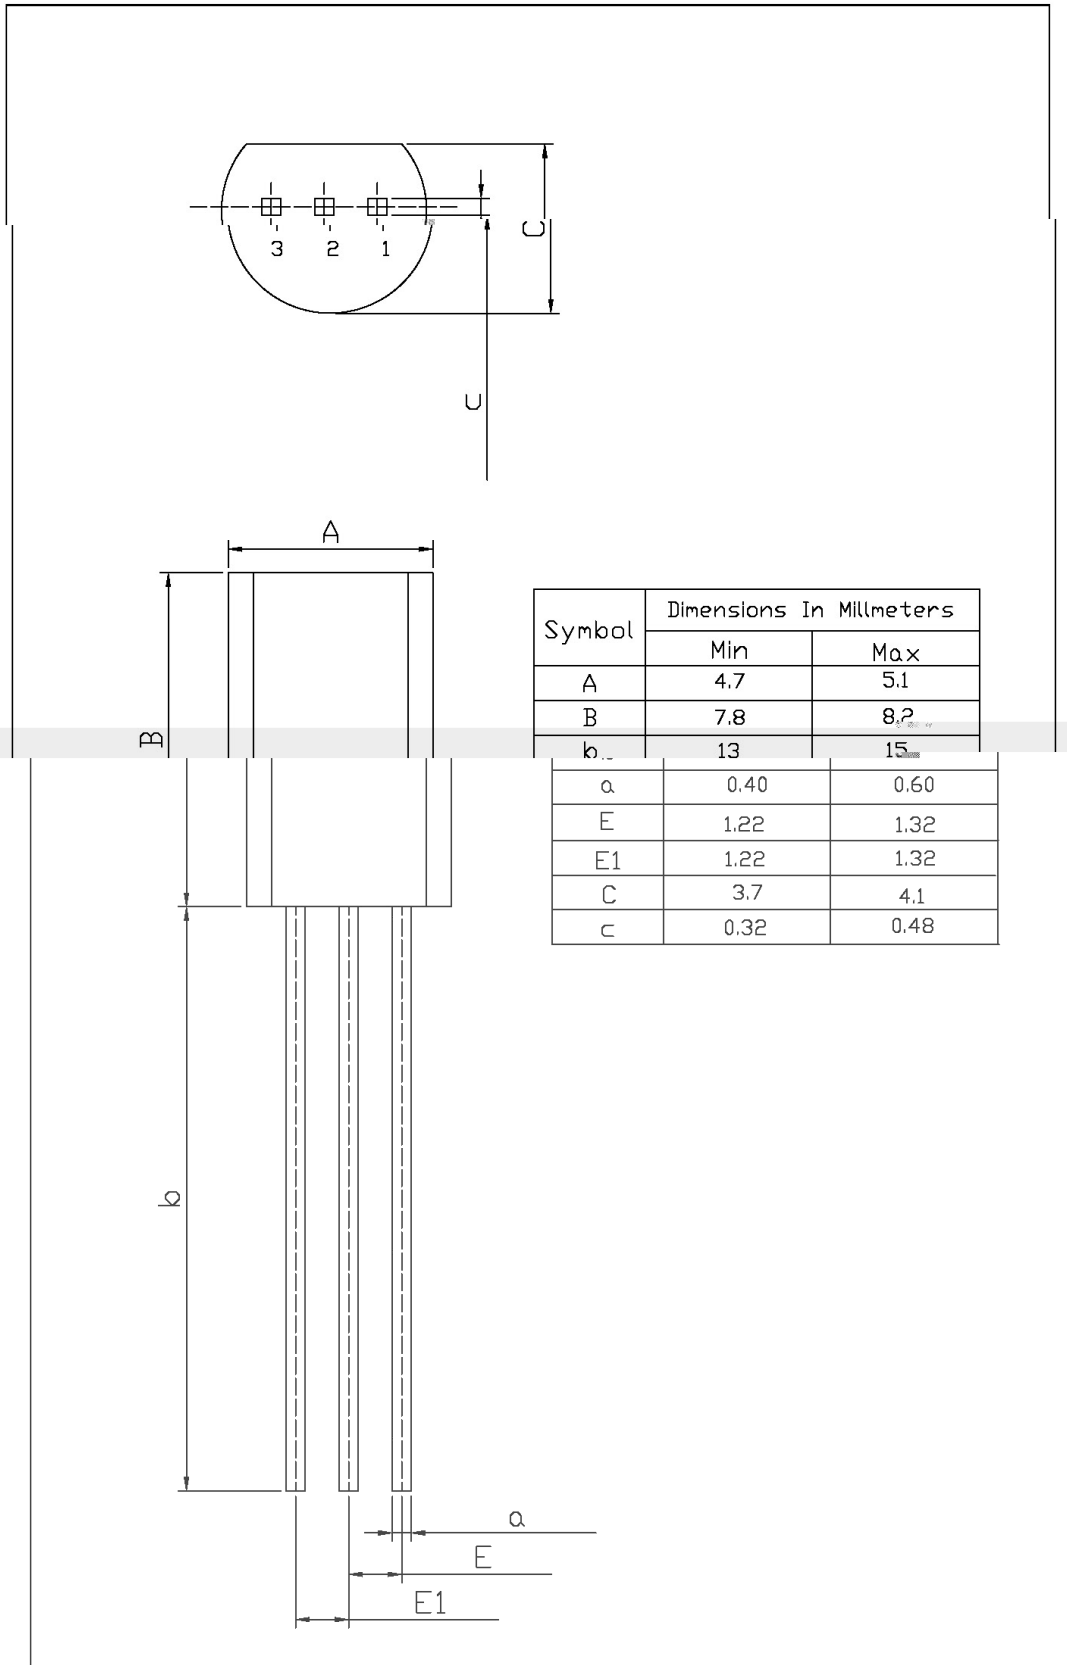



Note:


BR: Company Code.

D1862: Product Type.

Q: h_{FE} Classifications Symbol

****: Lot No. Code,code change with Lot No.



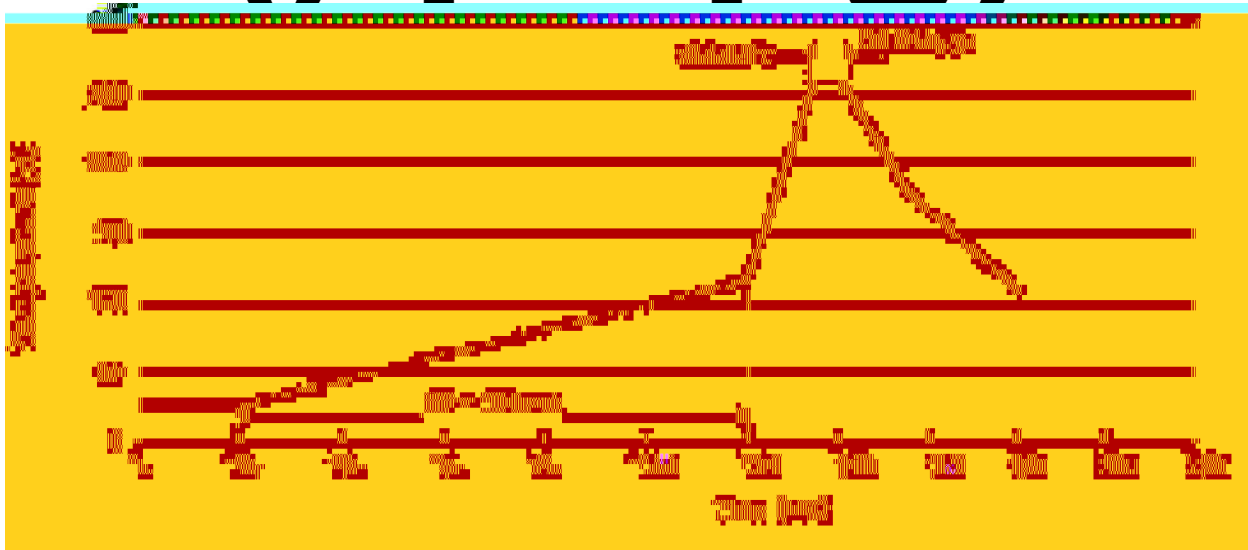

Note:

- 1 25 150 60 90sec; 1.Preheating:25~150 , Time:60~90sec.
 2 255 5 5 0.5 25 5 , Duration:5 0.5sec.
 3 /sec.

270

1 sec.

Temp.:270±5℃

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	Units/tape 只/带	Tape/Inner Box 带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92LM			100	10	25,000	328×230×42	小箱 480×346×235 大箱 547×407×268