


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking



/ Absolute Maximum Ratings(Ta=25)

		~	


/ Electrical Characteristics(Ta=25)


						μ
						μ

/ Electrical Characteristic Curve

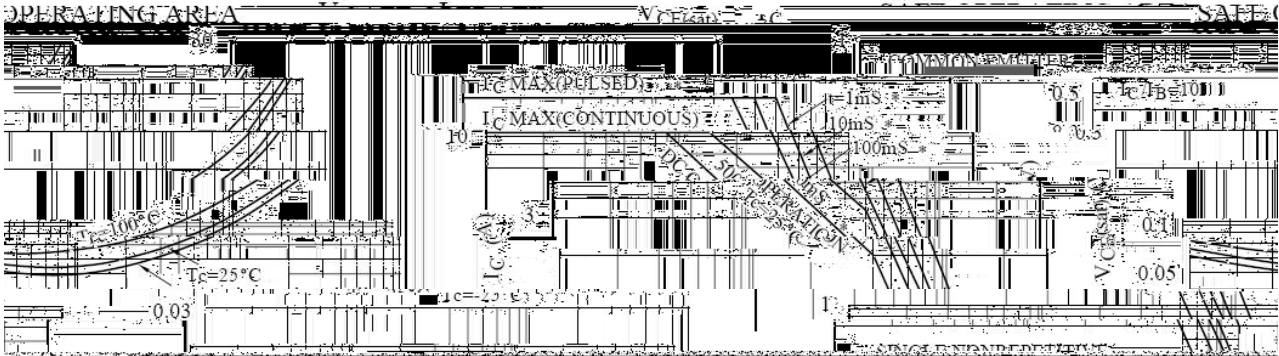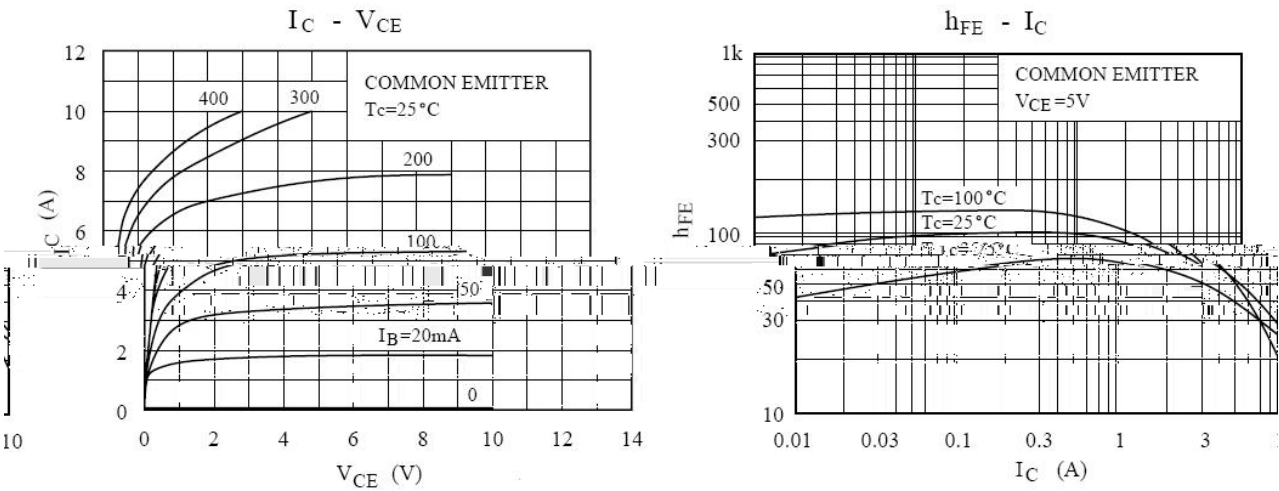


/ Package Dimensions

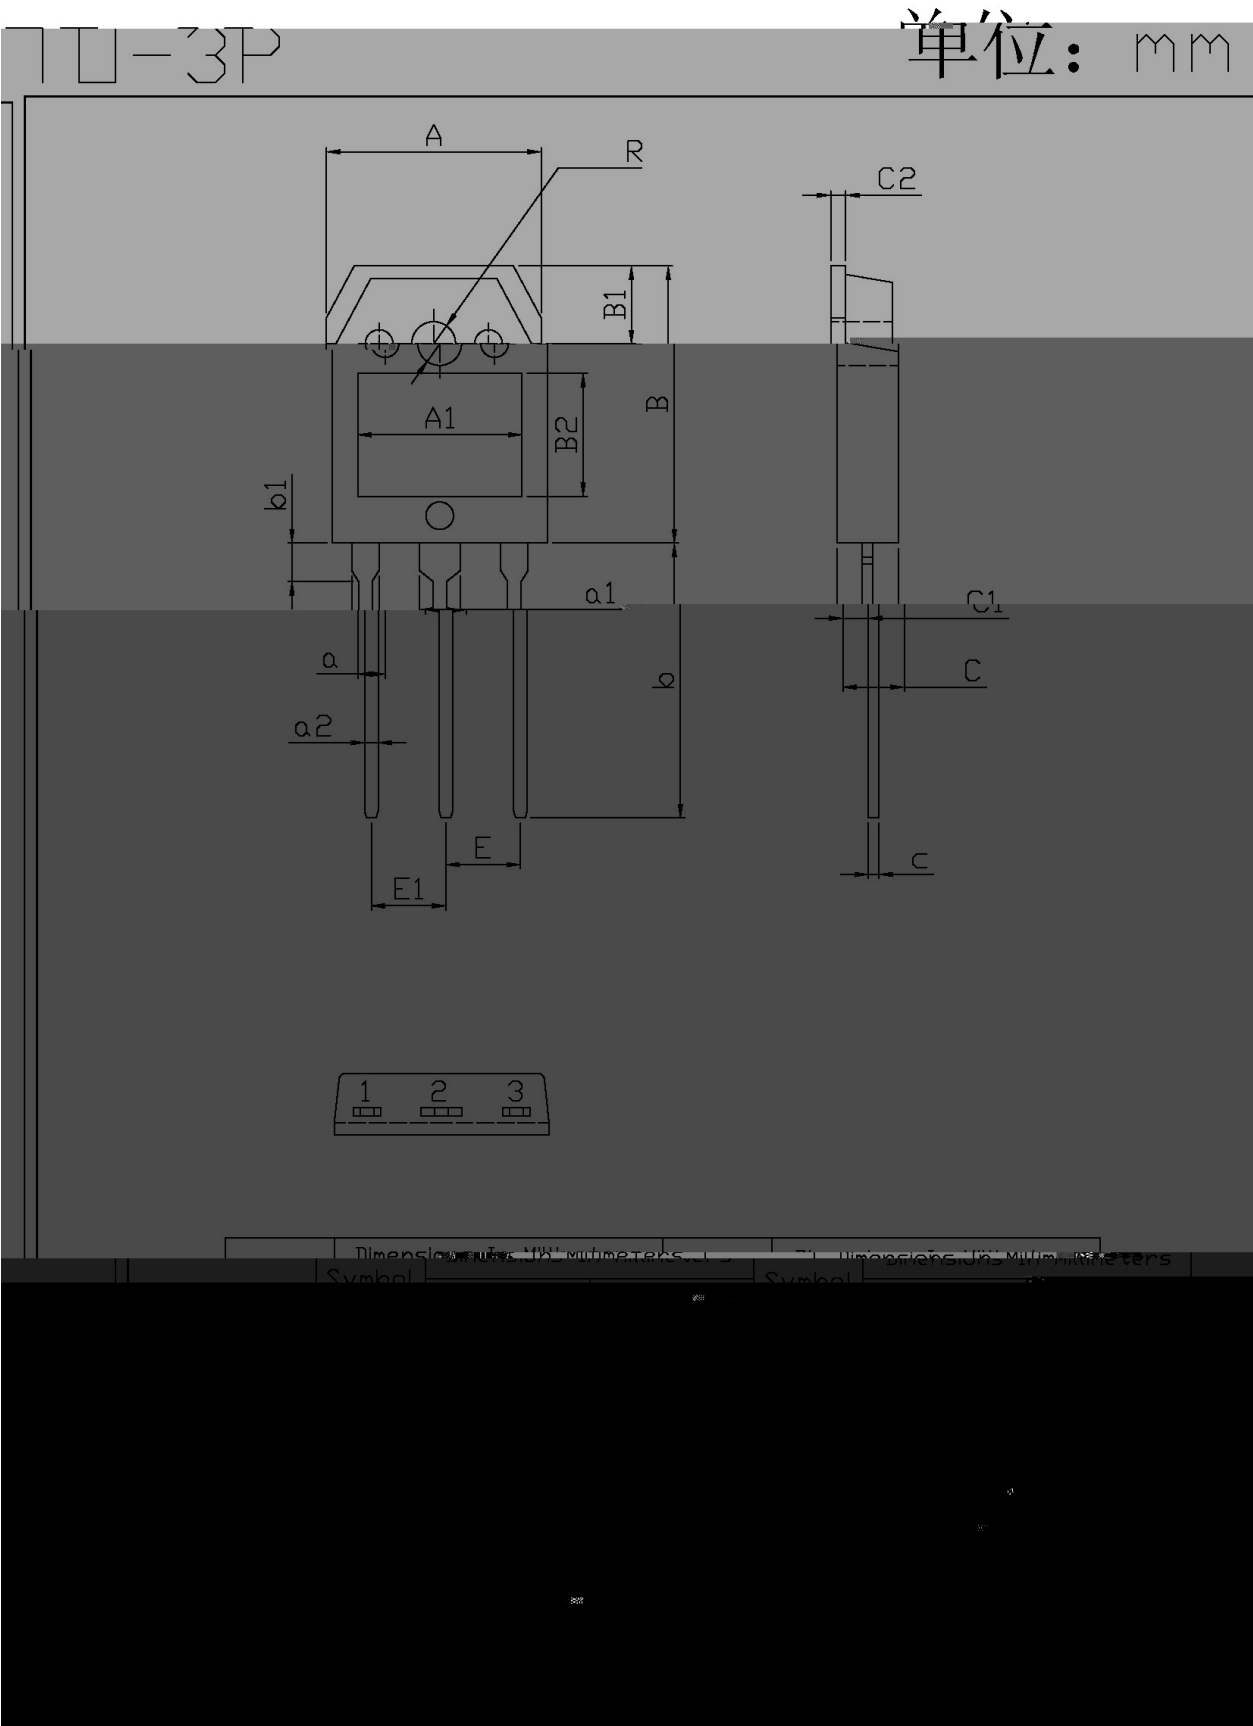

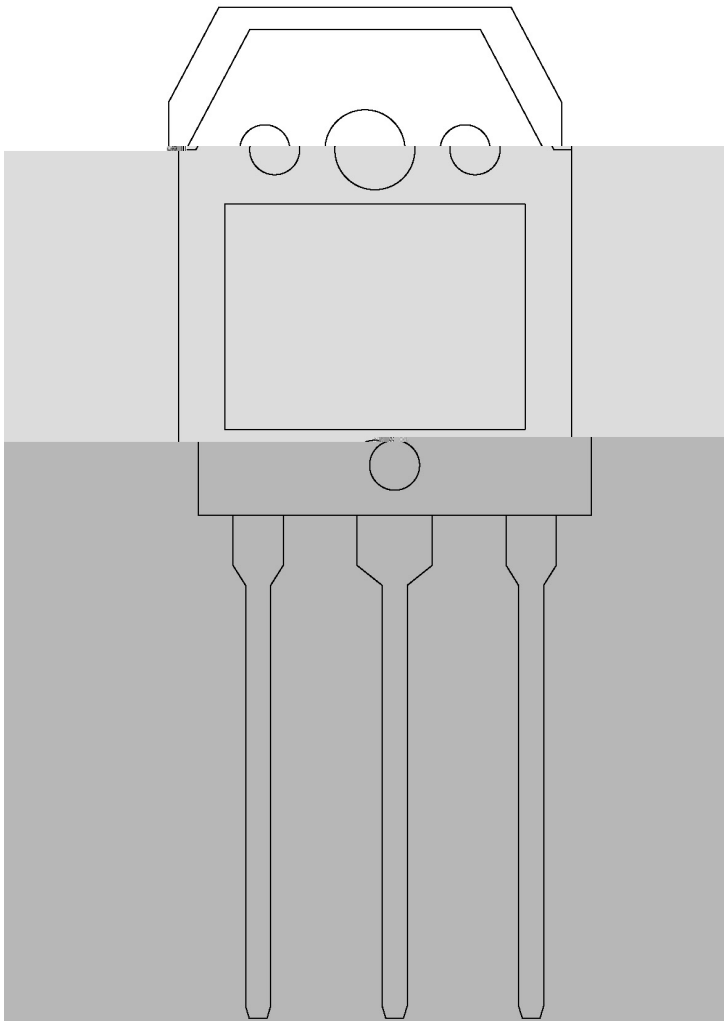

() / Temperature Profile for Dip Soldering(Pb-Free)

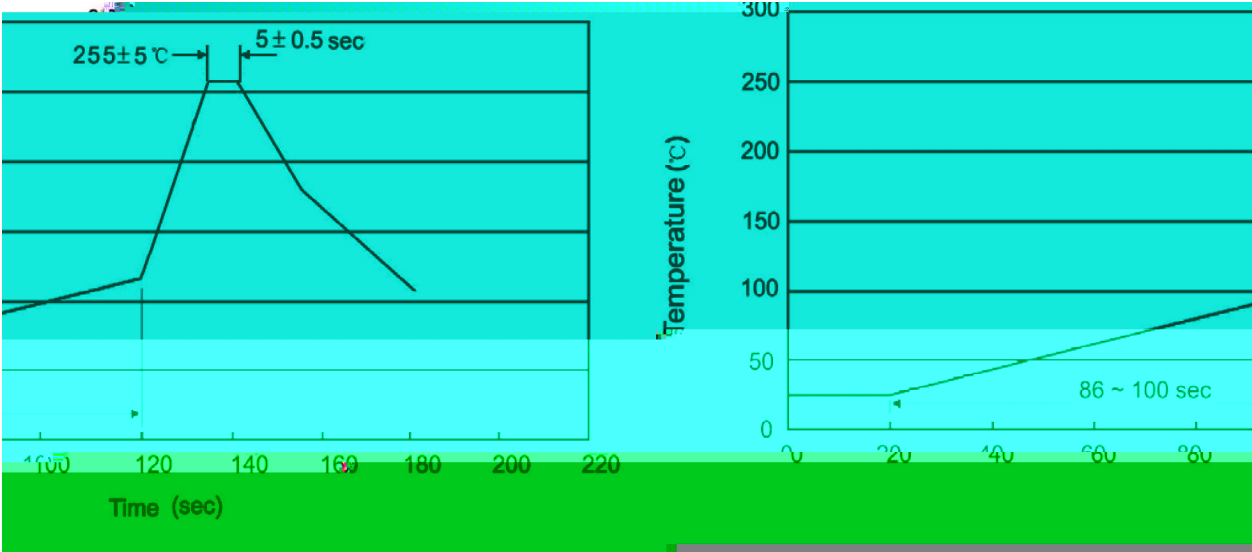

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices