

/ Descriptions


WR0<50 P SQS

/ Features

/

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking





	~	~

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

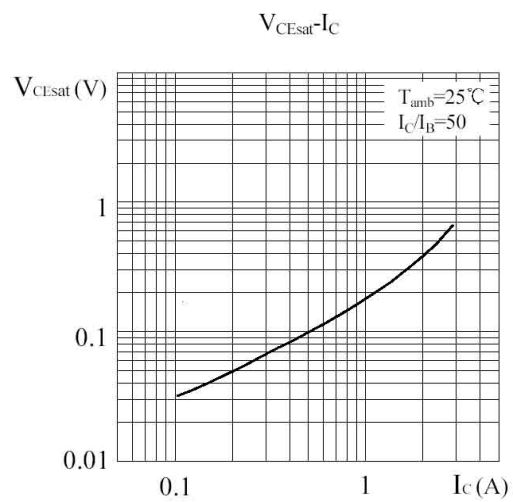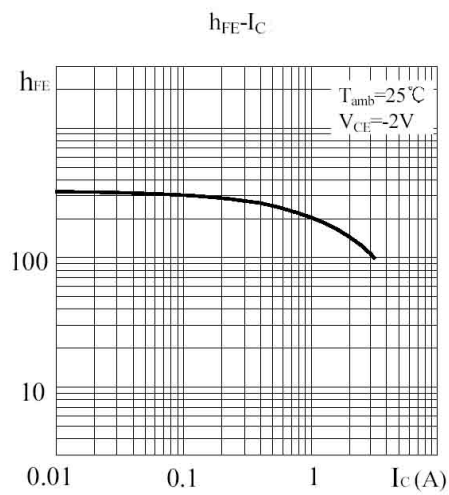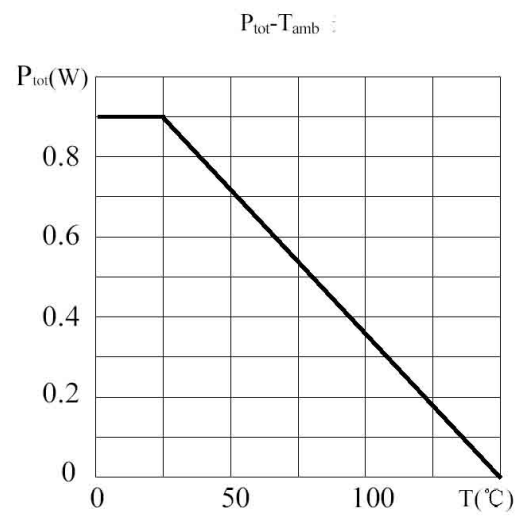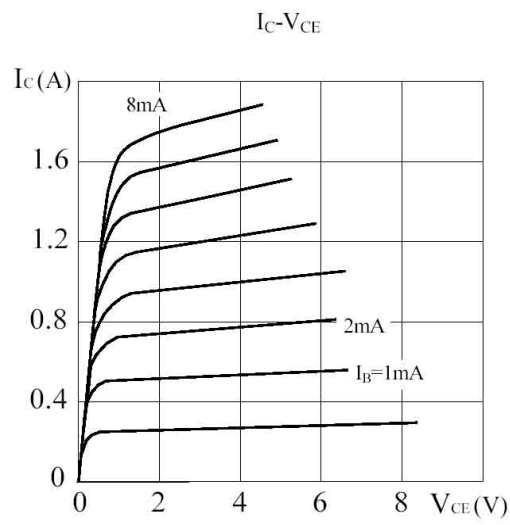


/ Package Dimensions

T0-92LM

Unit: mm

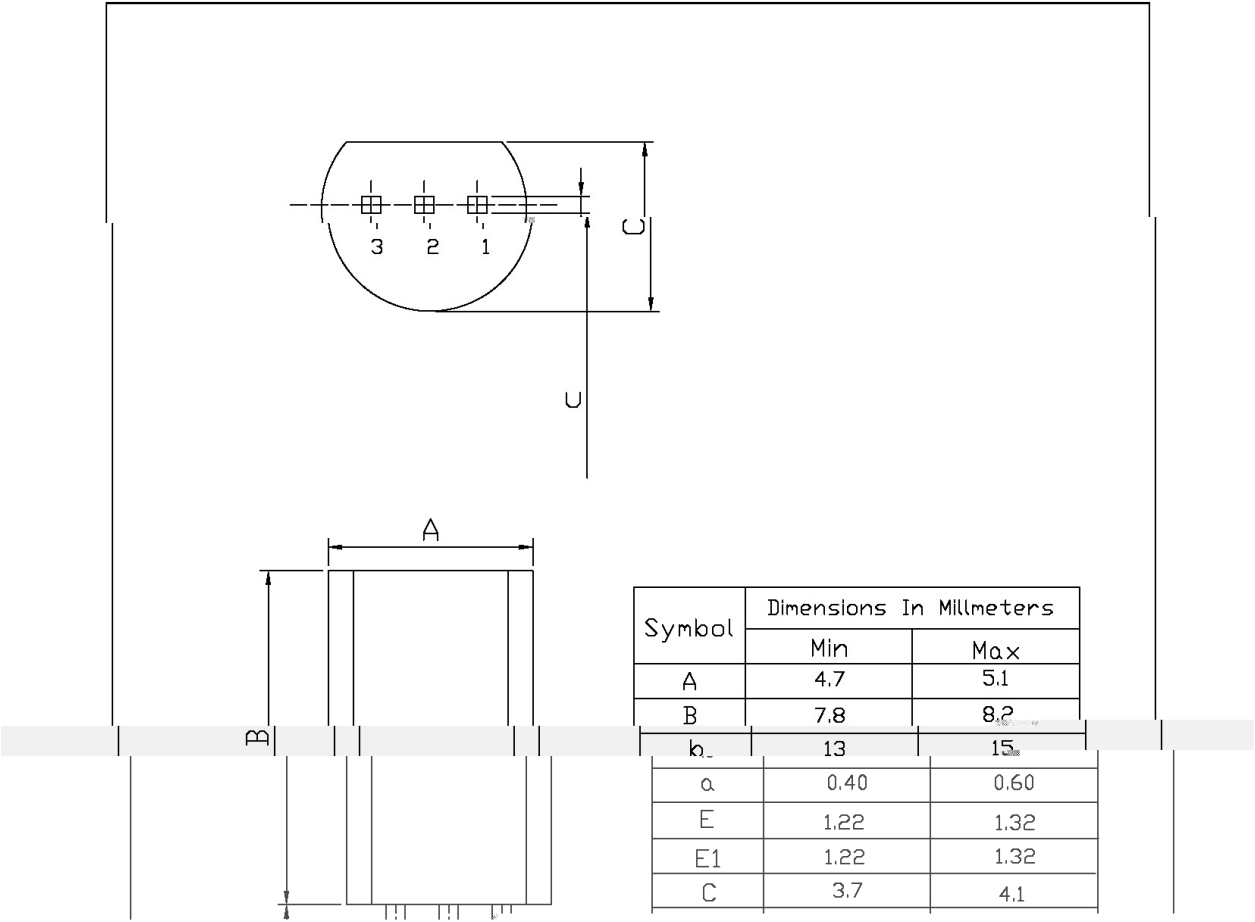


/ Marking Instructions

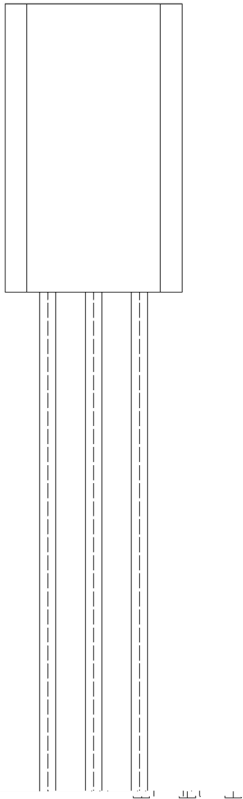

EU:
FJ :84
R: k_{IH}

() / Temperature Profile for Dip Soldering(Pb-Free)

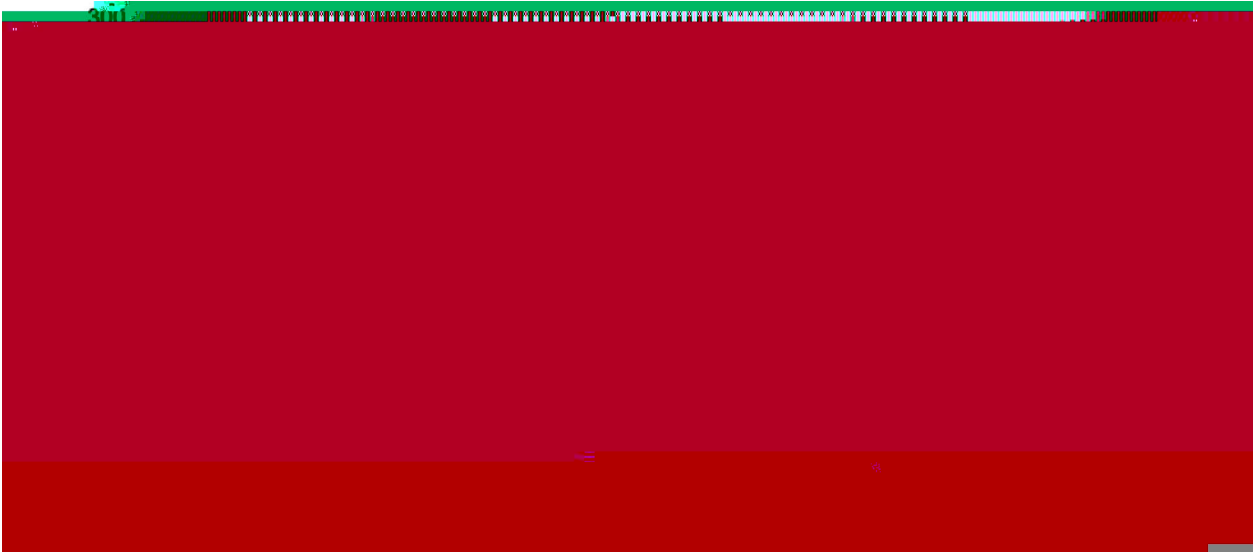

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

/ Resistance to Soldering Heat Test Conditions

2

3/8

2

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸 :	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 大箱

/ Notices