

**78L09T**



**DATA SHEET**

SOT-89

\*  
\*


/ Absolute Maximum Ratings(Ta=25 )

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |


/ Electrical Characteristics(Ta=25 Vi=15V,Io=40mA unless otherwise specified)

|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |


## I Electrical Characteristic Curve

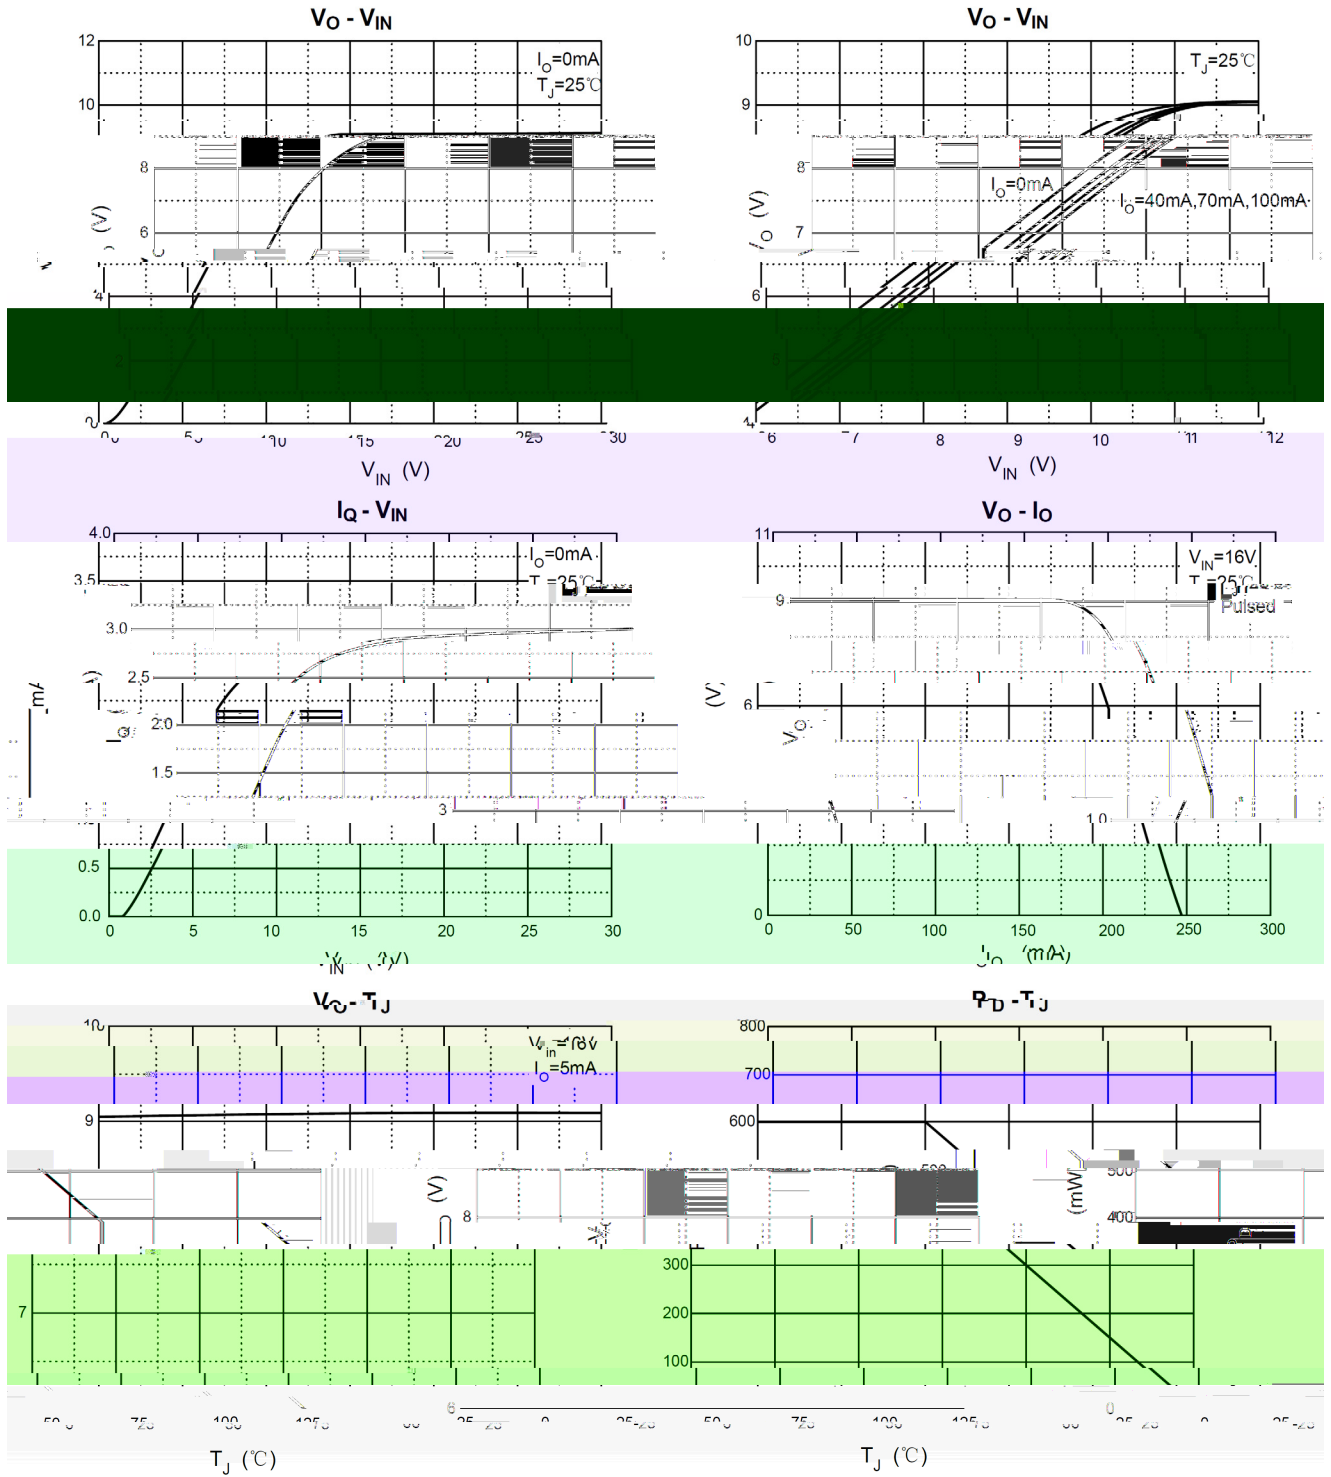

/ Package Dimensions

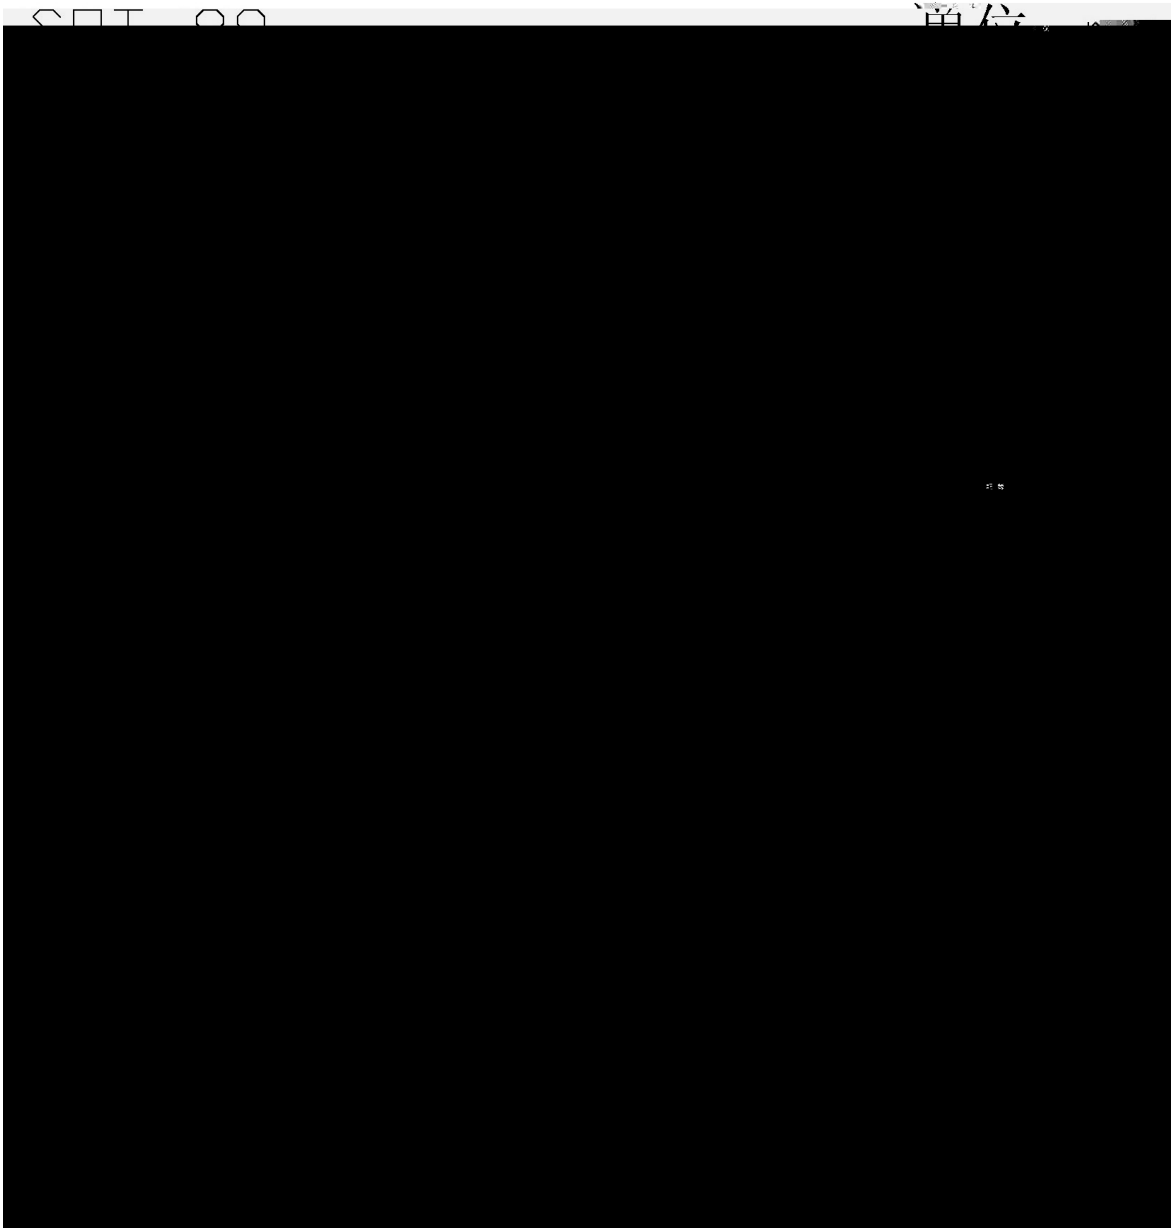


/ Marking Instructions

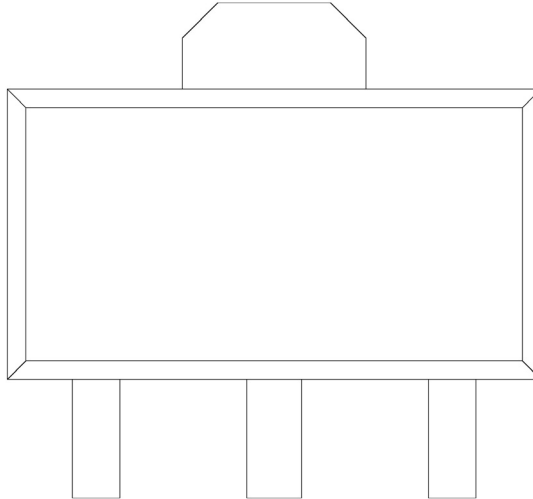

\*\*

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

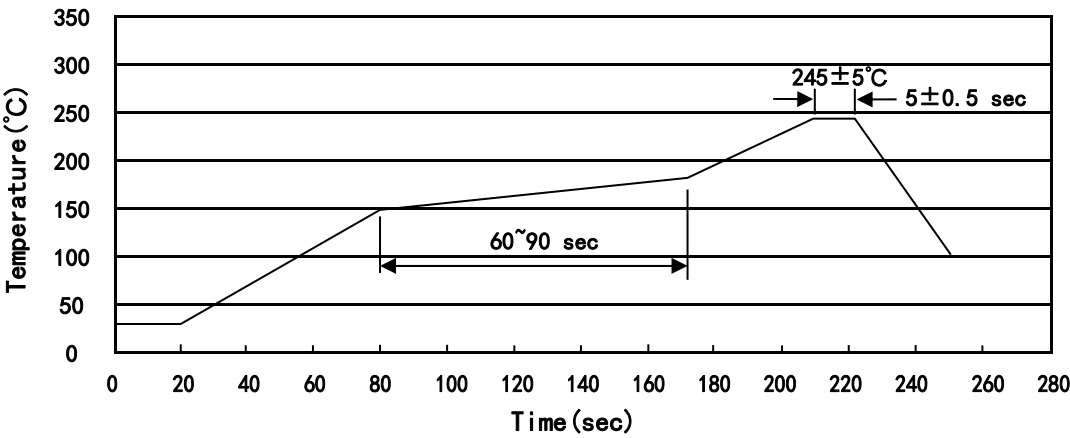

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |

/ Notices