/ Descriptions

SOT-23 PNP Silicon PNP transistor in a SOT-23 Plastic Package.

/ Features

8050MG

Complementary pair with 8050MG, HF Product.

/ Applications

Power amplifier applications.

/ Equivalent Circuit



/ Pinning

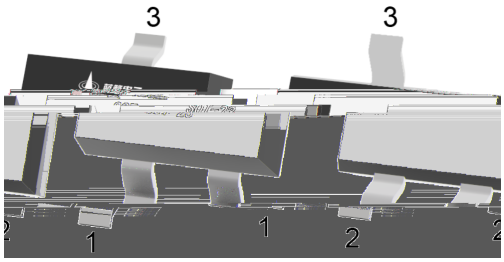

PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	B	C	D
h_{FE} Range	85 160	120 200	160 300
Marking	GY2B	GY2C	GY2D

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-25	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current	I_C	-1.5	A
Base Current	I_B	-0.5	A
Collector Power Dissipation	P_C	300	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	I_C=-0.1mA I_E=0	-40			V
Collector to Emitter Breakdown Voltage	V_{CEO}	I_C=-2.0mA I_B=0	-25			V
Emitter to Base Breakdown Voltage	V_{EBO}	I_E=-0.1mA I_C=0	-6.0			V
Collector Cut-Off Current	I_{CBO}	V_{CB}=-35V I_E=0			-0.1	μA
Emitter Cut-Off Current	I_{EBO}	V_{EB}=-6.0V I_C=0			-0.1	μA
DC Current Gain	$h_{FE(1)}$	V_{CE}=-1.0V I_C=-100mA	85		300	
	$h_{FE(2)}$	V_{CE}=-1.0V I_C=-800mA	40			
	$h_{FE(3)}$	V_{CE}=-1.0V I_C=-5.0mA	45			
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=-800mA I_B=-80mA		-0.28	-0.5	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	I_C=-800mA I_B=-80mA		-0.98	-1.2	V
Base-Emitter Voltage	V_{BE}	V_{CE}=-1.0V I_C=-10mA		-0.66	-1.0	V
Transition Frequency	f_T	V_{CE}=-10V I_C=-50mA	100	200		MHz
Collector Output Capacitance	C_{ob}	V_{CB}=-10V I_E=0 f=1.0MHz		15		pF

/ Electrical Characteristic Curve

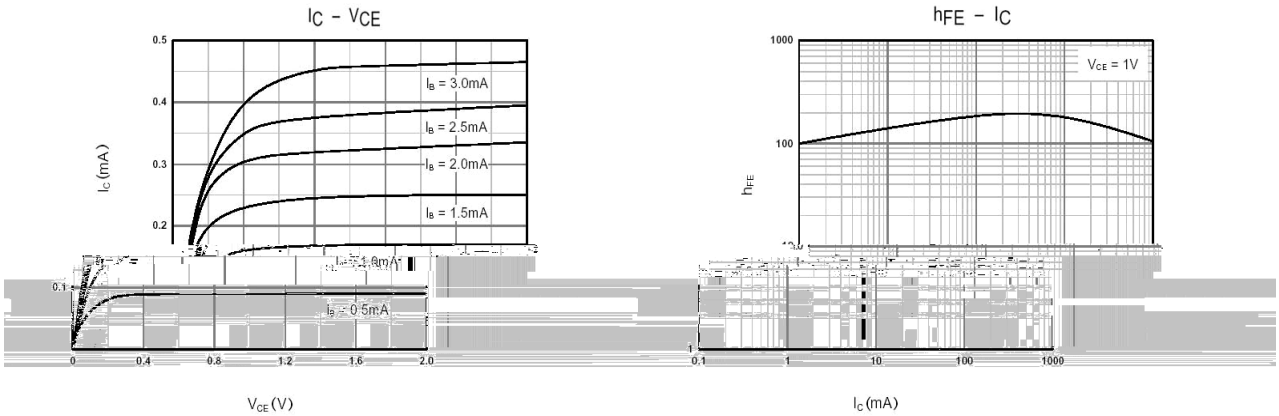

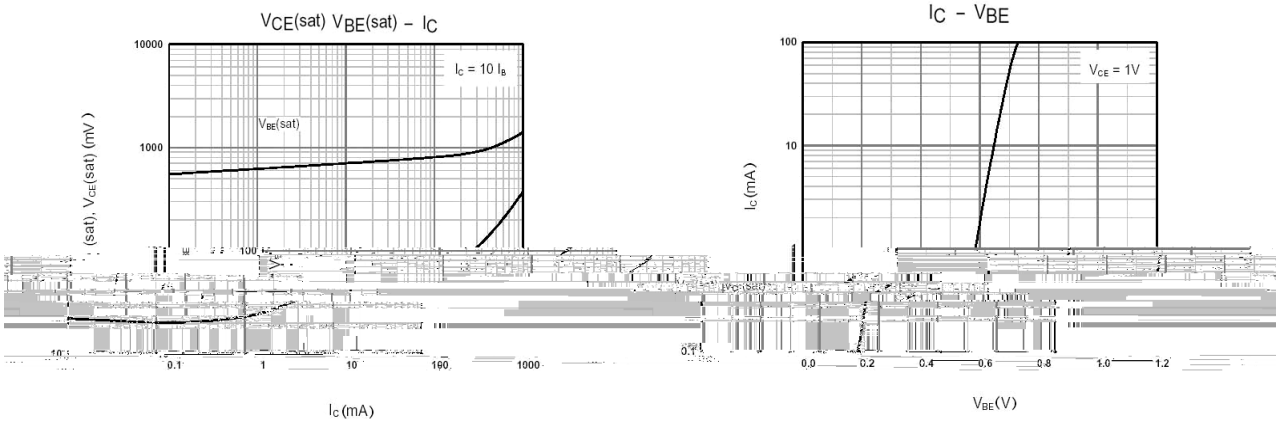

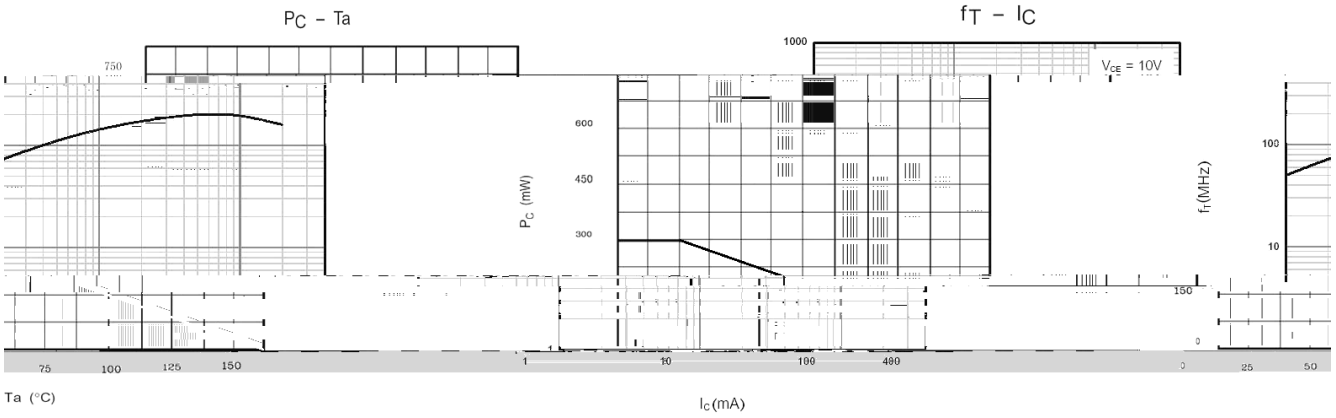

/ Package Dimensions

SOT-23

单位：mm

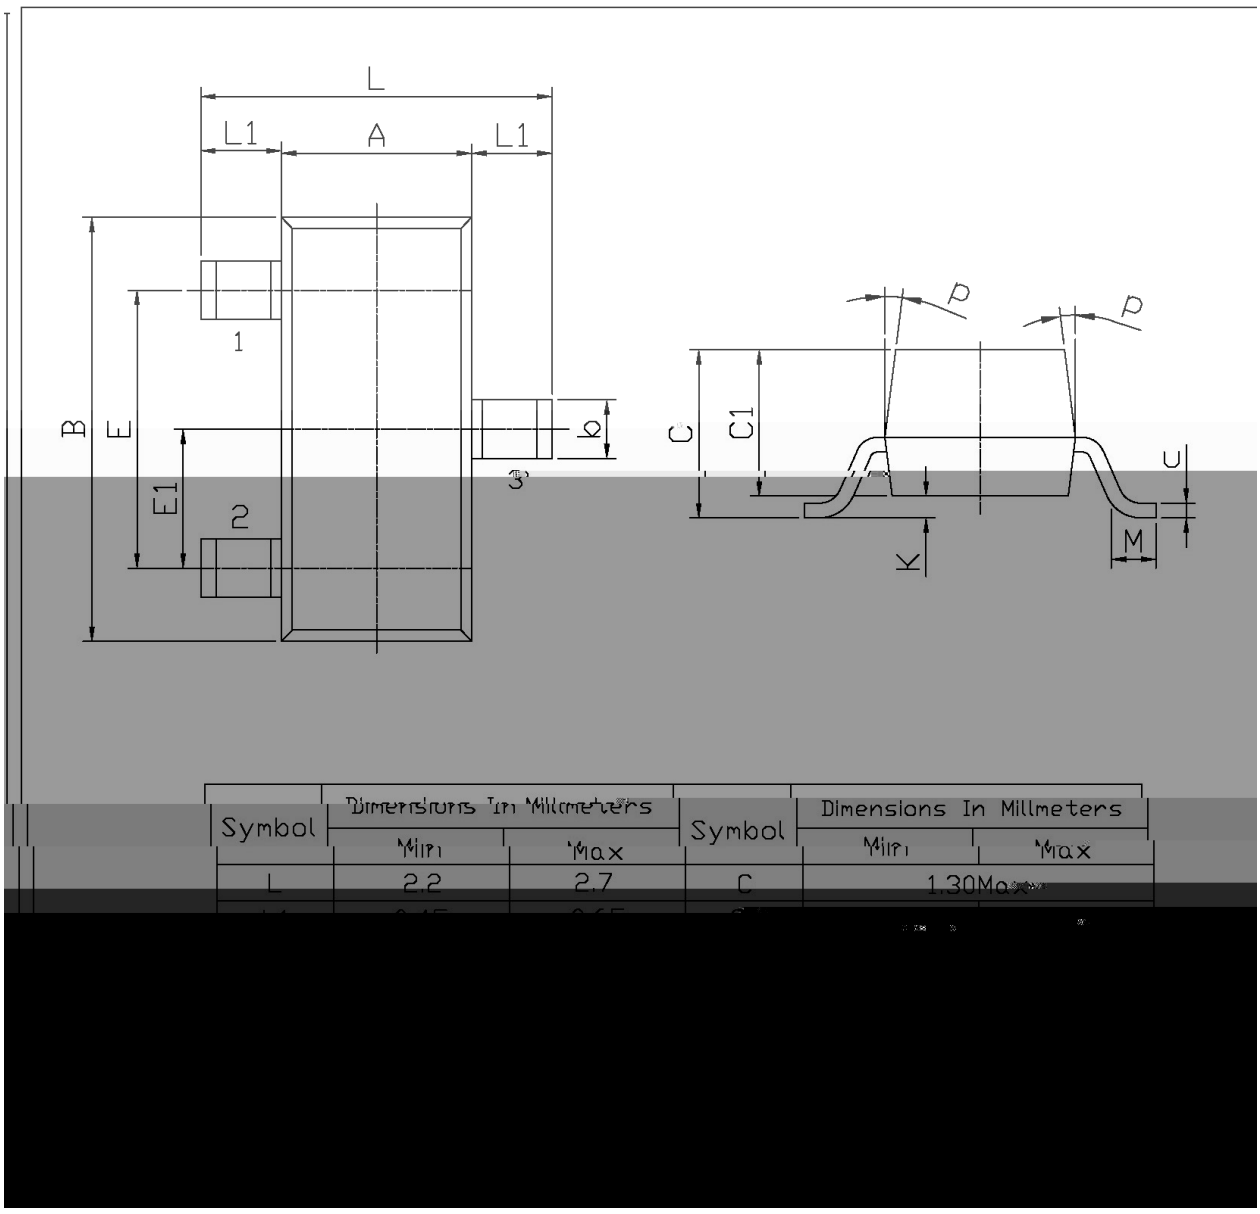

Symbol	Dimensions In Millmeters		Symbol	Dimensions In Millmeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	

/ Marking Instructions

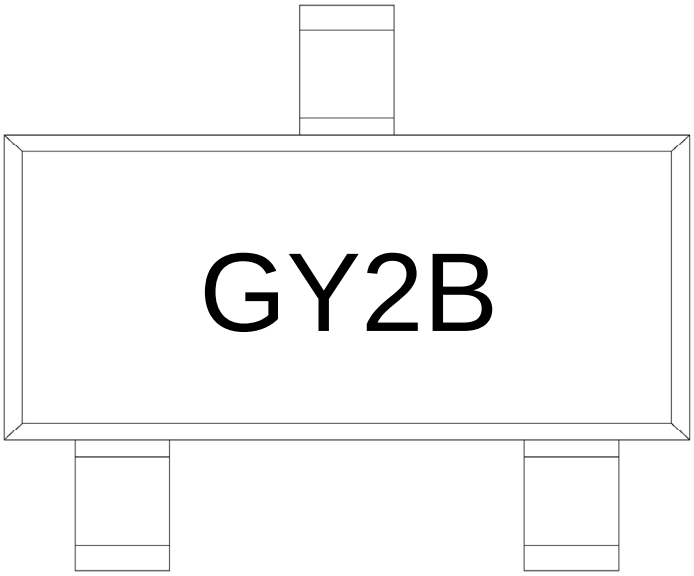

G

Y2

B h_{FE}

Note:

G	Halogen Free Product Code
Y2	Product Type Code
B	h_{FE} Classifications Symbol Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

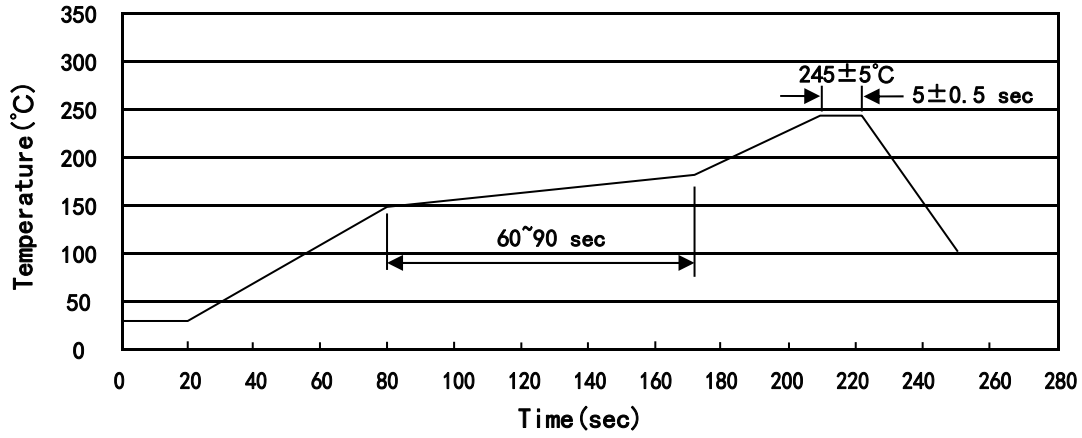

					Note:	
1		150	180	60	90sec;	1.Preheating:150~180 , Time:60~90sec.
2		245±5			5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3			2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension		(unit mm³)
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices