


“Y / Descriptions


• È / Features

v / Applications

Л ~ α ≈ / Equivalent Circuit



ã / ů / Pinning



т. н џ / Marking


	*	*	*	*

绝对最大值 / Absolute Maximum Ratings(Ta=25 ℃)

电 学 特 性 / Electrical Characteristics(Ta=25 ℃)

						μ
						μ
		Ω	Ω			


电 压 电 流 特 性 曲 线 / Electrical Characteristic Curve

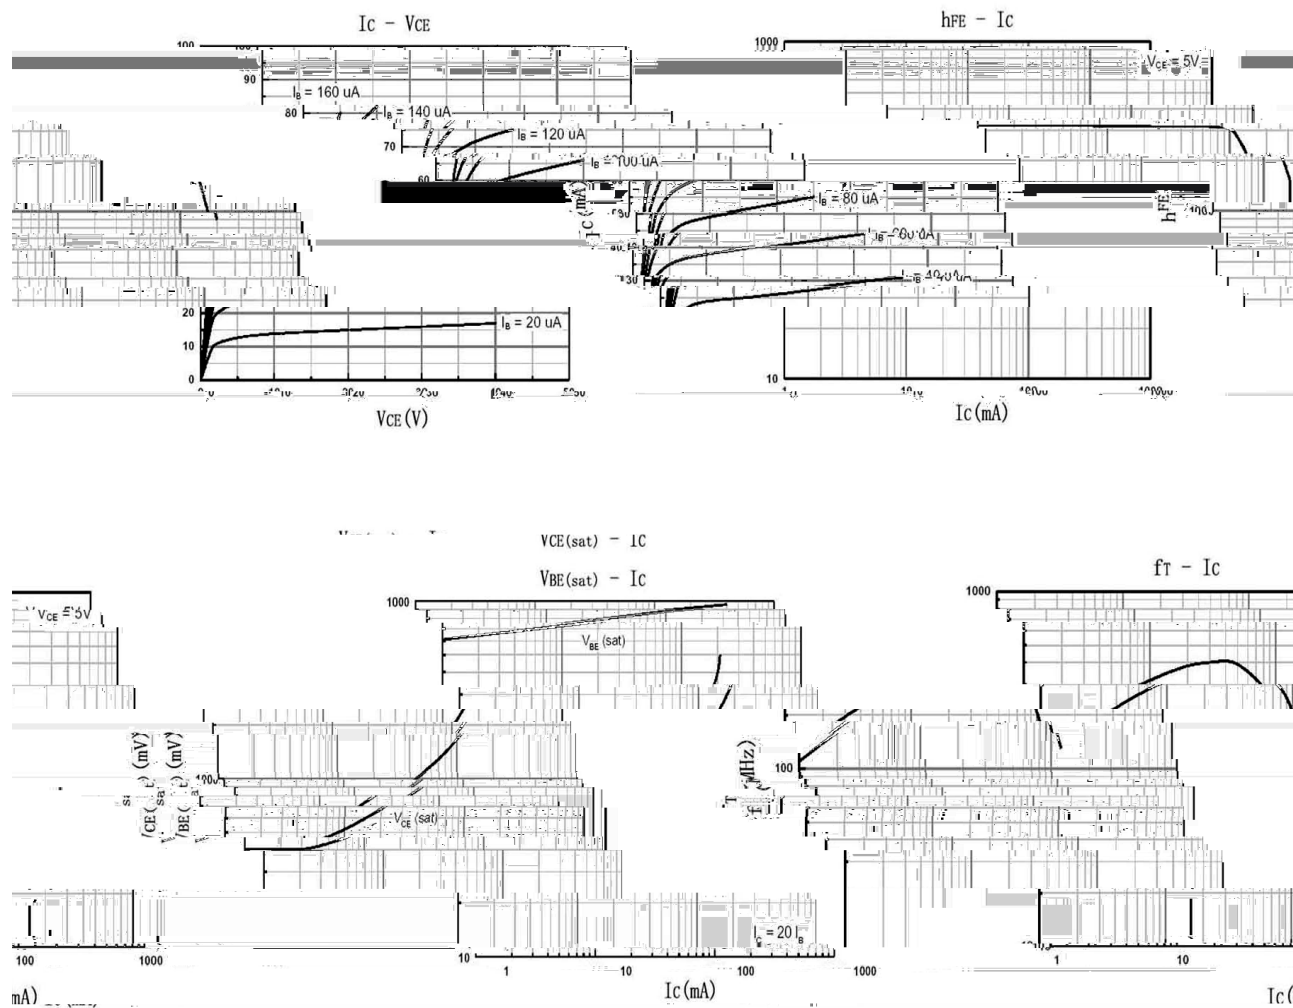


⌘ È Ò Ì ¢ / Package Dimensions

SOT-89


单位: mm

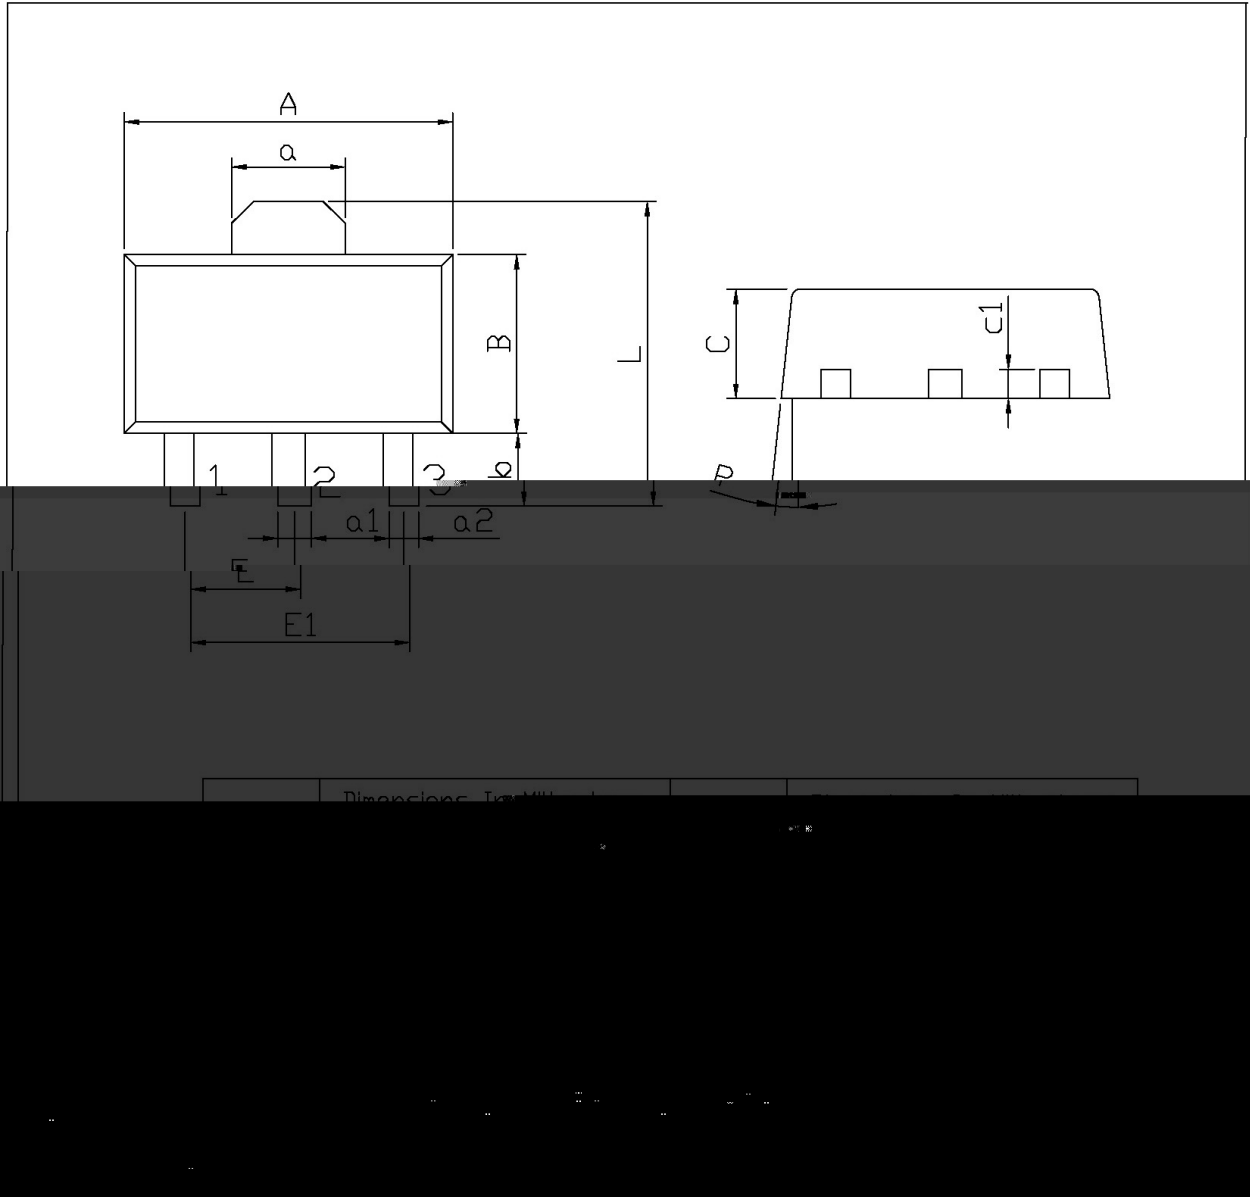

4. 符号 / Marking Instructions

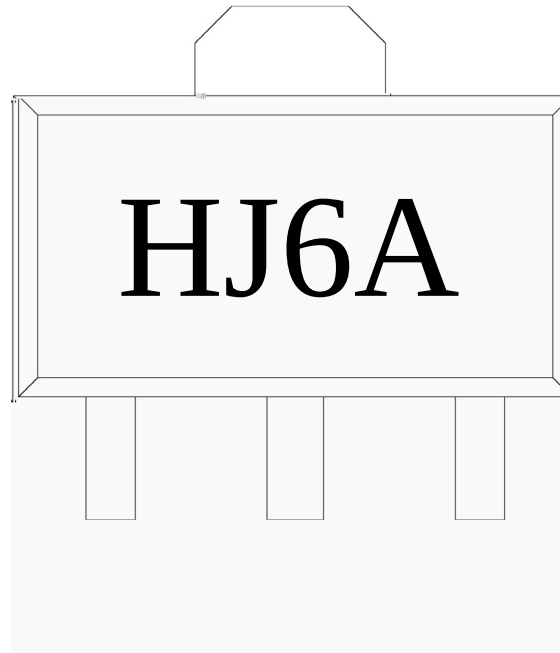

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

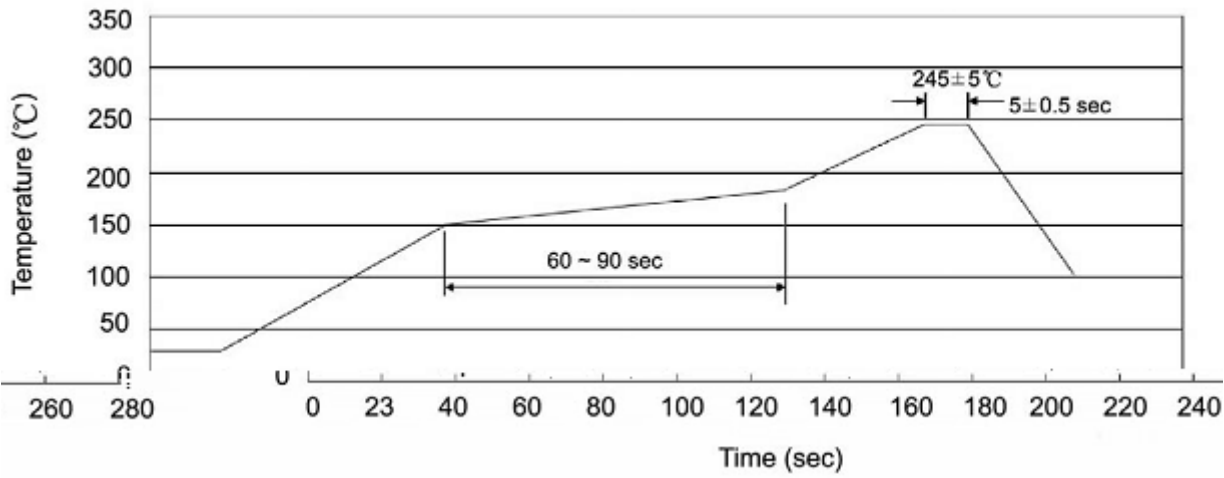

Resistance to Soldering Heat Test Conditions

Packaging SPEC.

封装形式	包装数量					包装尺寸	
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	盒	箱