


/ Revised record

[illegible]




/ Descriptions

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




/ Marking




/ Absolute Maximum Ratings(Ta=25)


	()				
					℃
					℃

/ Electrical Characteristics(Ta=25)




/ Package Dimensions

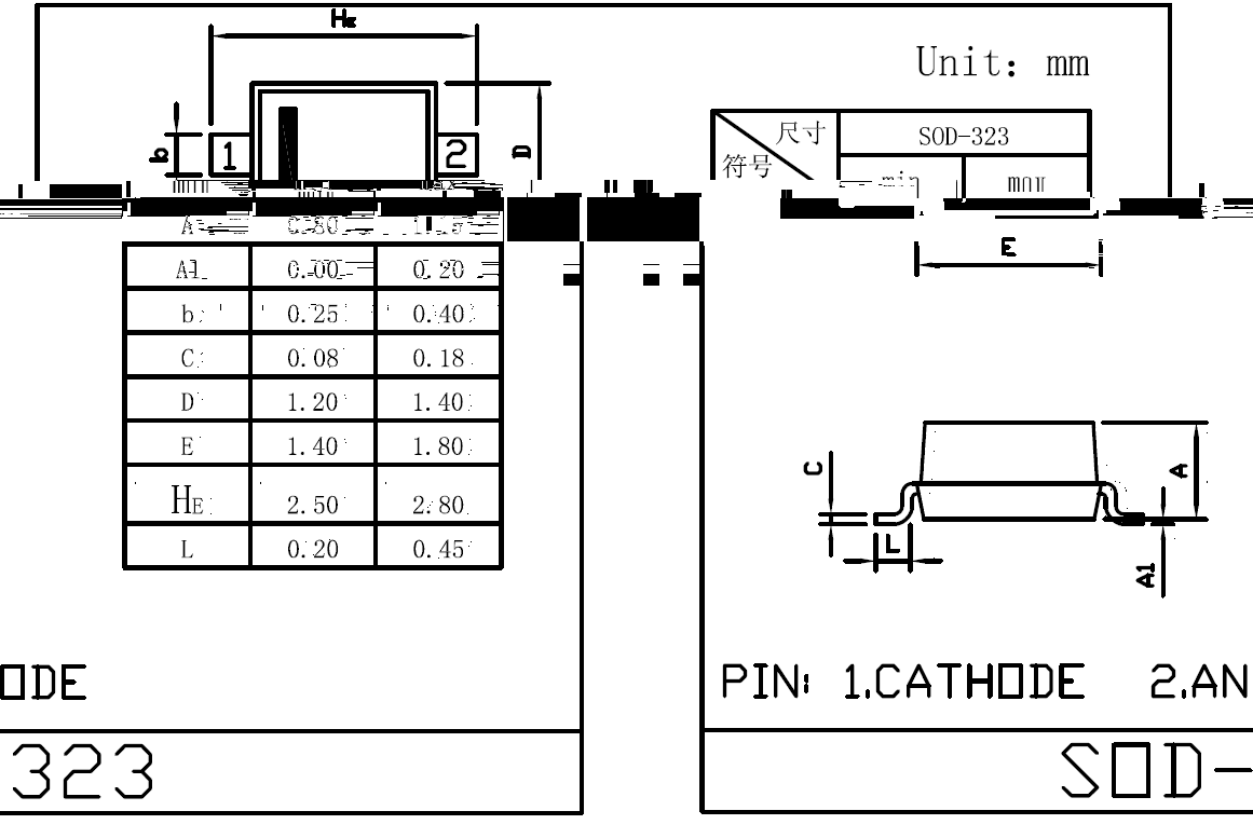




/ Marking Instructions

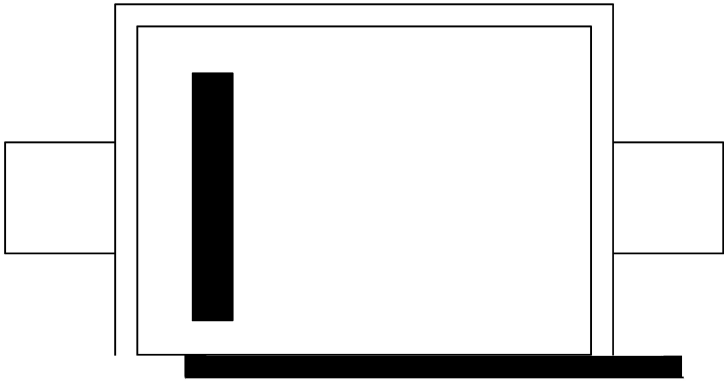

H
SJ



() /

说明：

- 、预热温度 ~ °C，时间 ~ °C
- 、峰值温度 ± °C，时间持续为 ± °C ±
- 、焊接制程冷却速度为 ~ °C °C

/ Resistance to Soldering Heat Test Conditions

温度： ± °C 时间： ± ± °C ±

/ Packaging SPEC.

卷盘包装

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205