

/ Electrical Characteristic Curve

Fig.1 Power Derating Curve

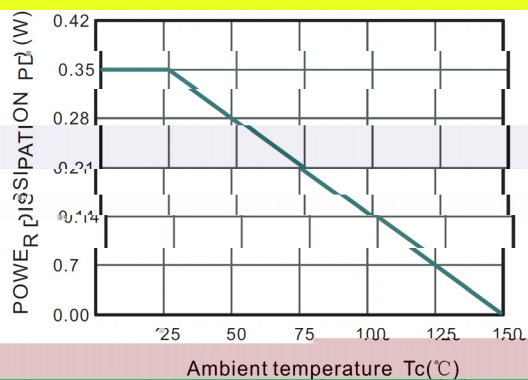


Fig.2 Typical Reverse Characteristics

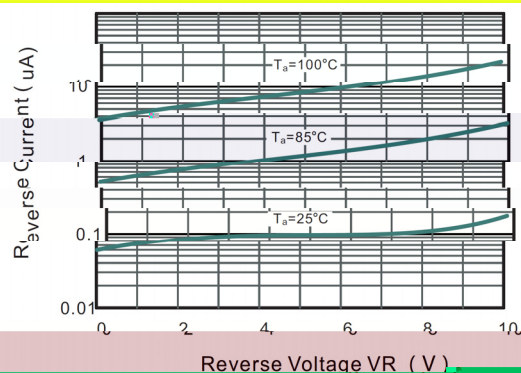


Fig.3 Typical Junction Capacitance

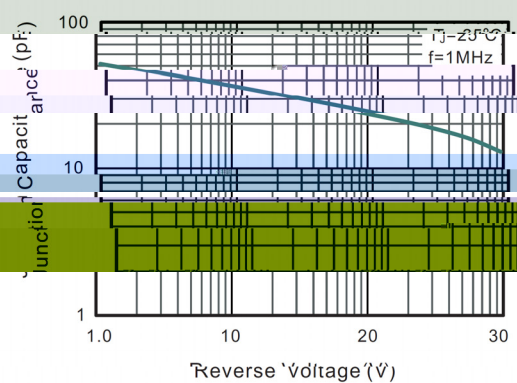


Fig.4 Typical Forward Characteristic



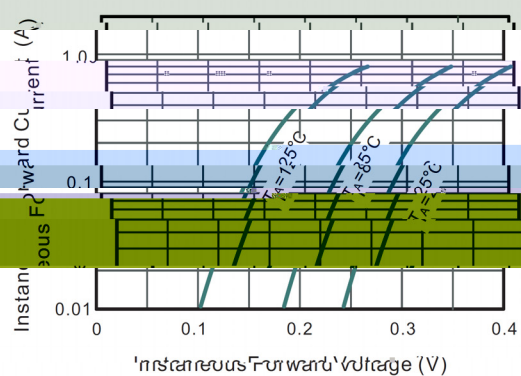


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

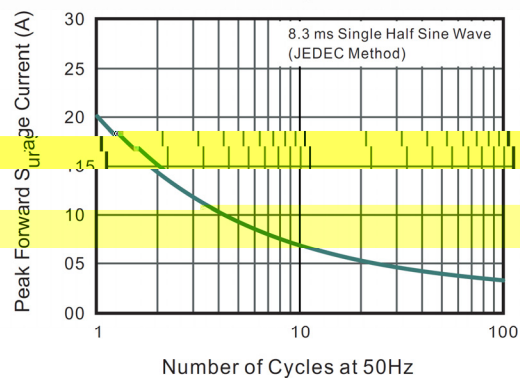

/ Package Dimensions

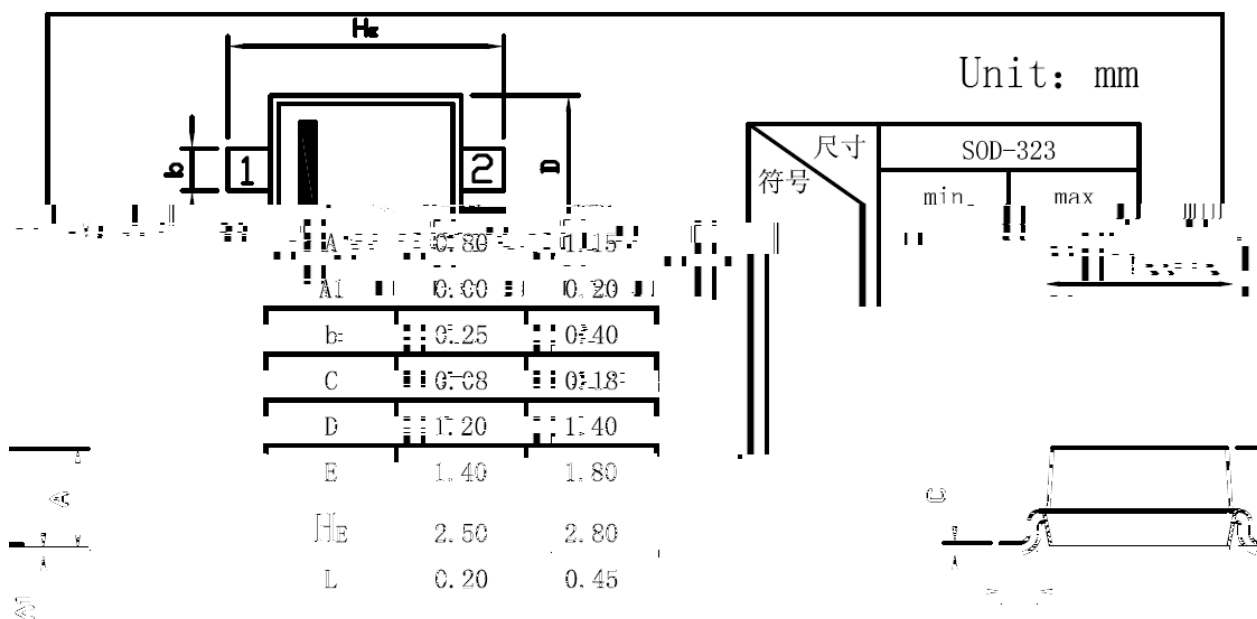


2AN 1

PIN: 1CA

SOD-323

BAT60B

() /

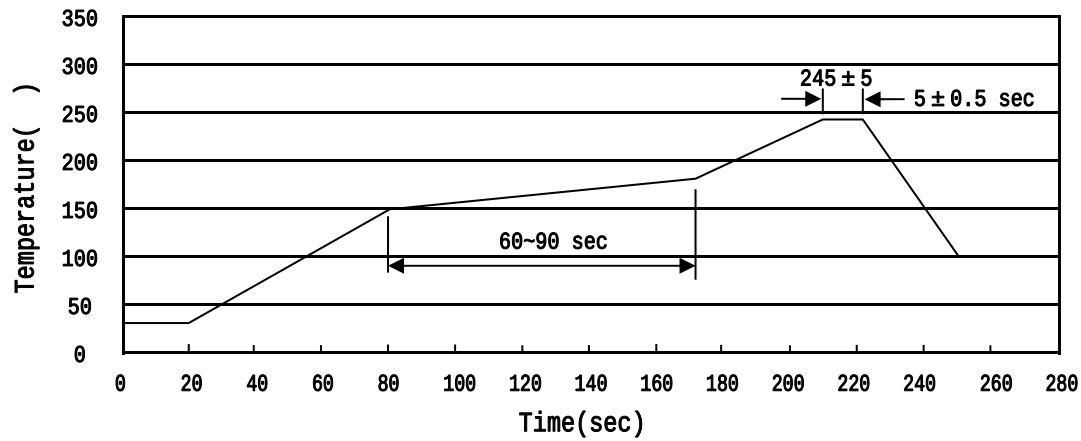 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices