


/ Descriptions

/ Features

/ Applications


/ Equivalent Circuit



/ Pinning




/ Marking



/ Absolute Maximum Ratings(Ta=25 –)

/ Electrical Characteristics(Ta=25 –)


I Electrical Characteristic Curve

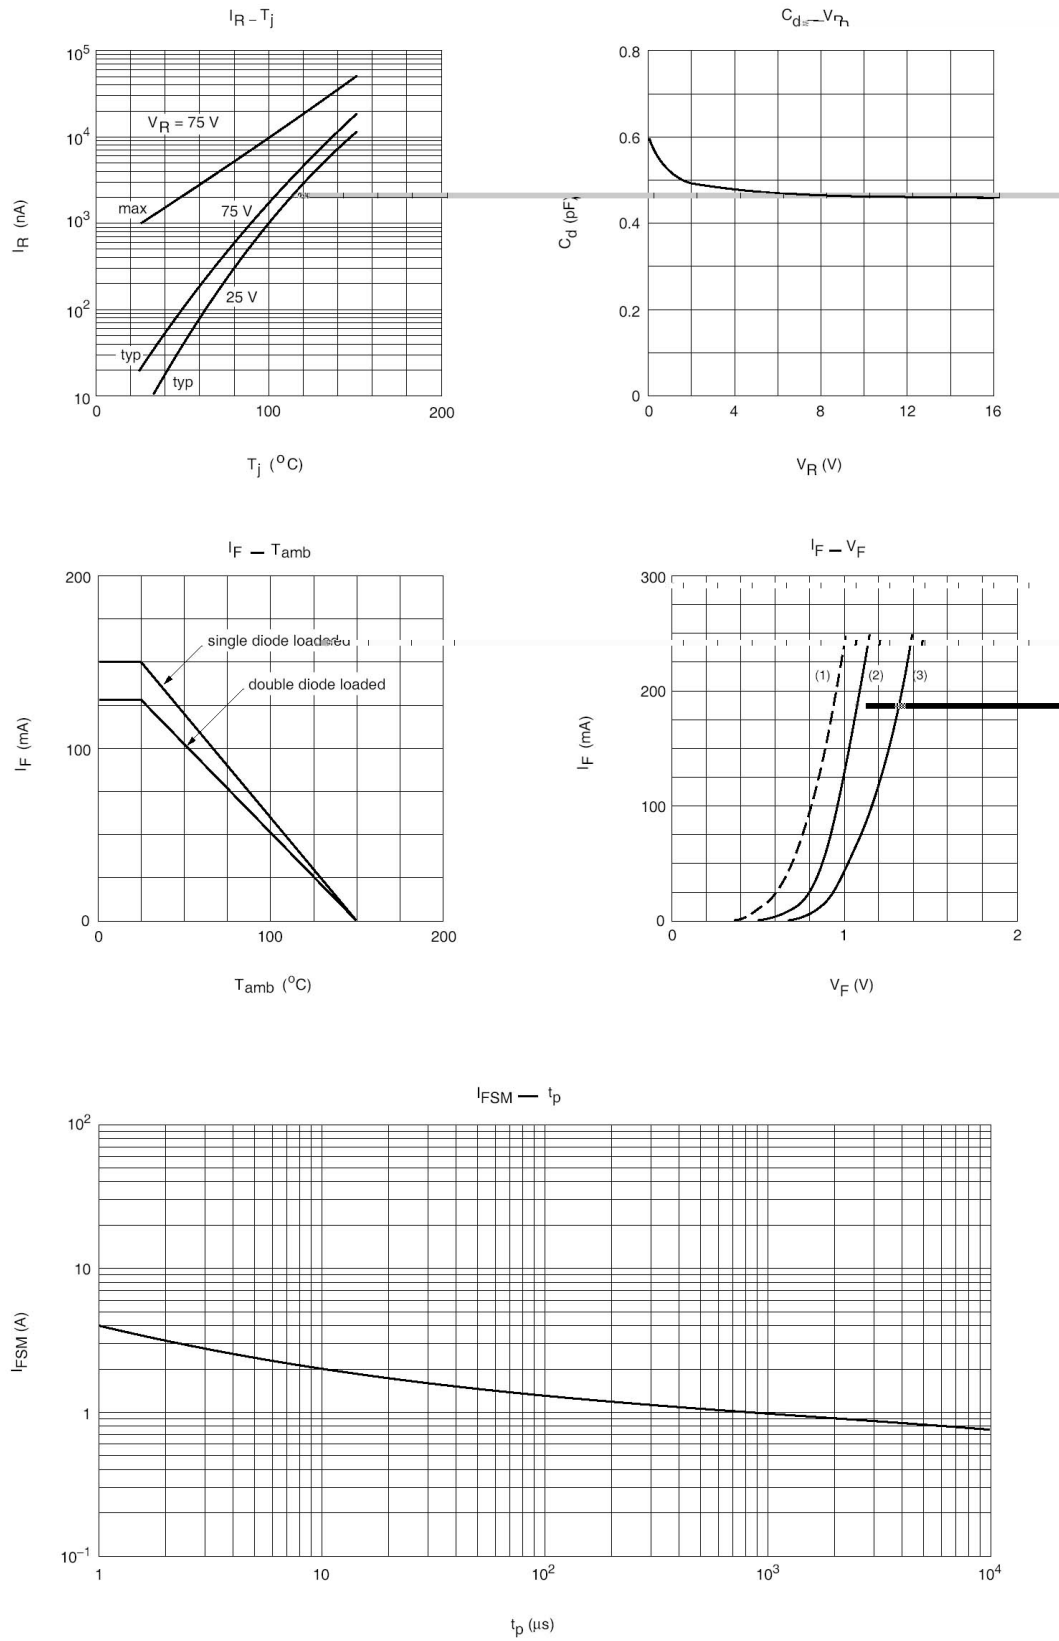

/ Package Dimensions


SOT-323

单位：mm

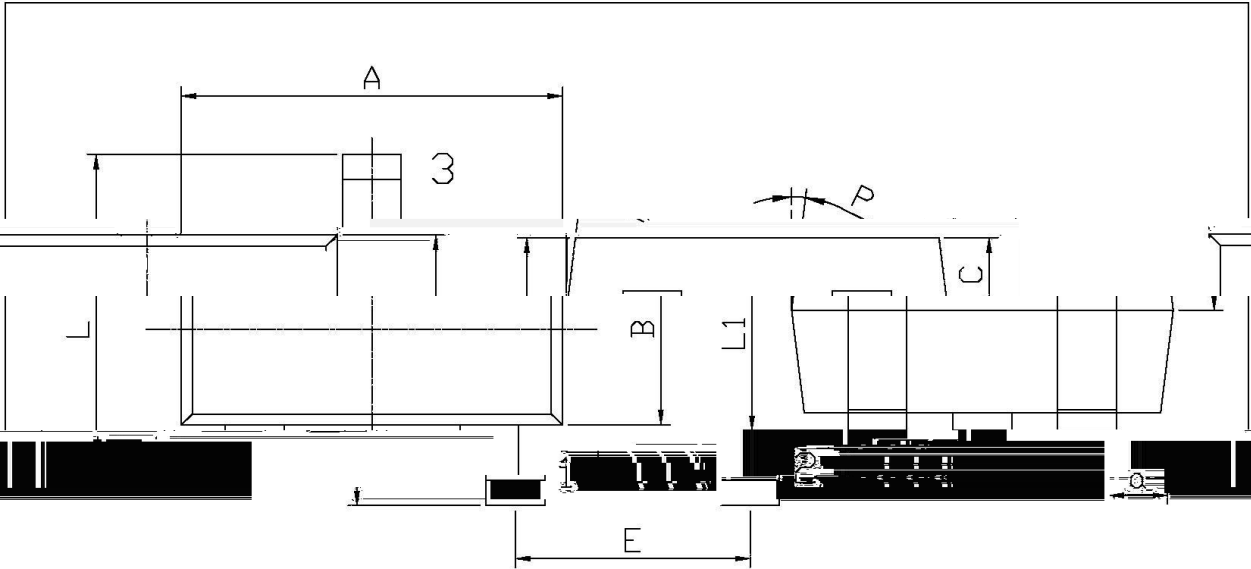


Max	Symbol	Min	Max	Symbol	Min
2.35	C	0.30	0.50	A	1.95
2.2	□	0.85	1.5	L1	2.00
1.40	□	0.20	0.40	E	1.20
0.10	□	0.10	0.10	B	0.10

/ Marking Instructions

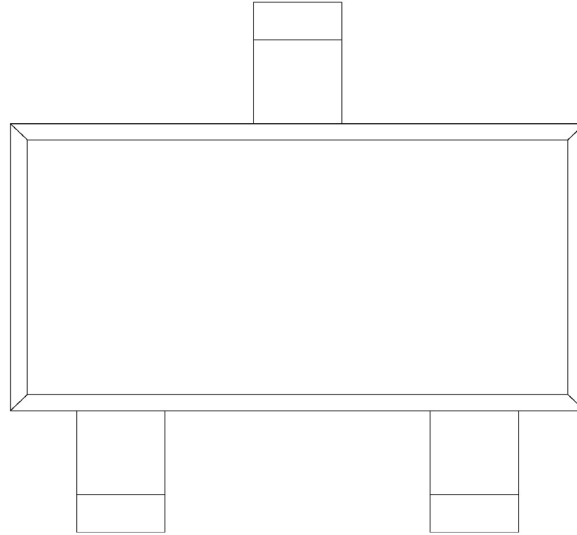

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

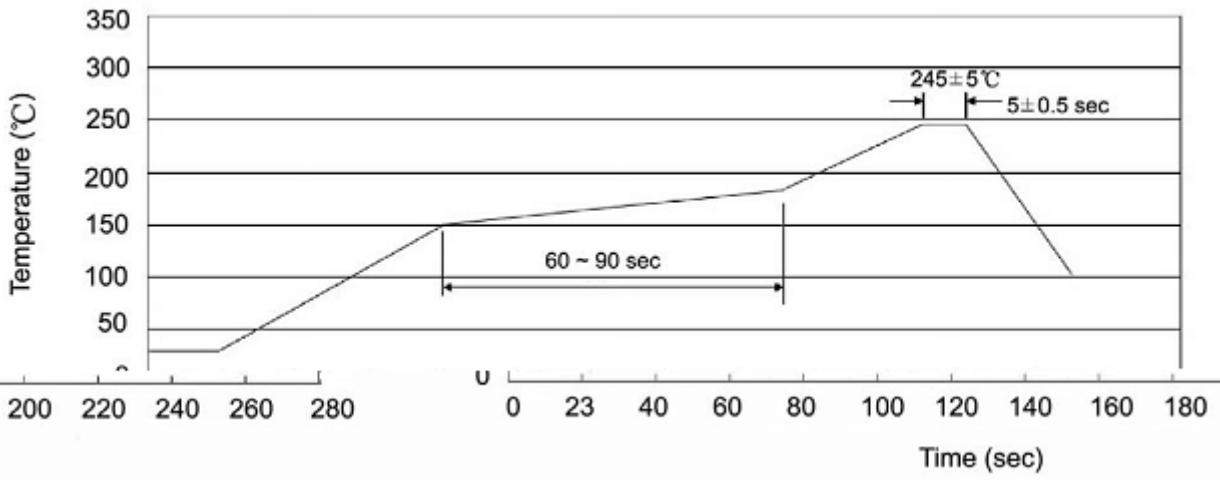

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices