

/ Descriptions


/ Features

1. High efficiency

/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
			℃


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
		Ω				


/ Electrical Characteristic Curve

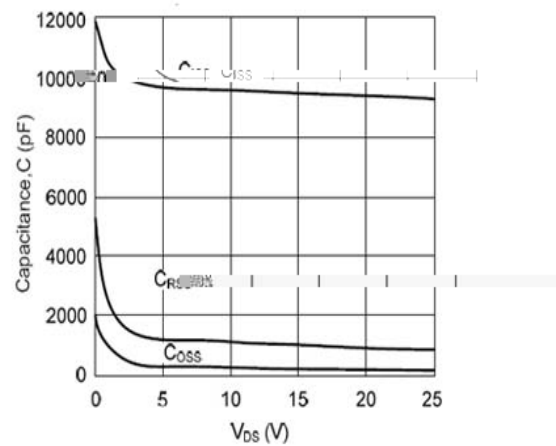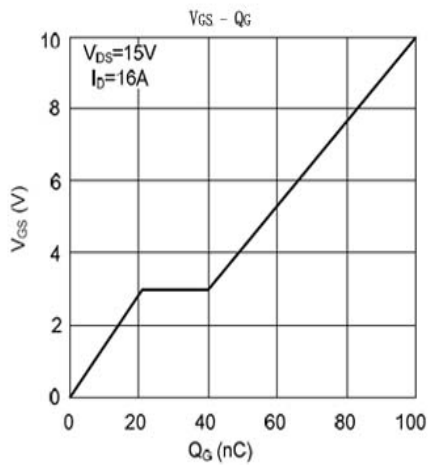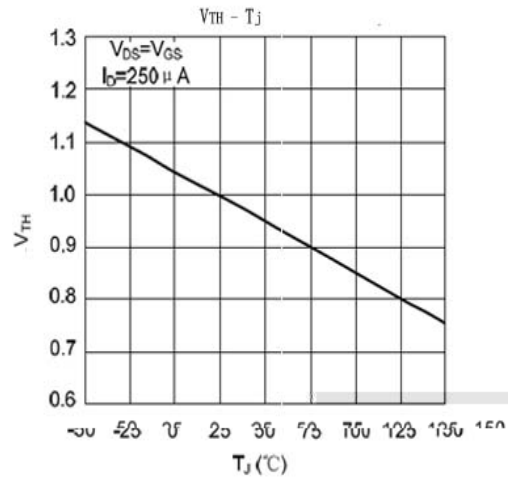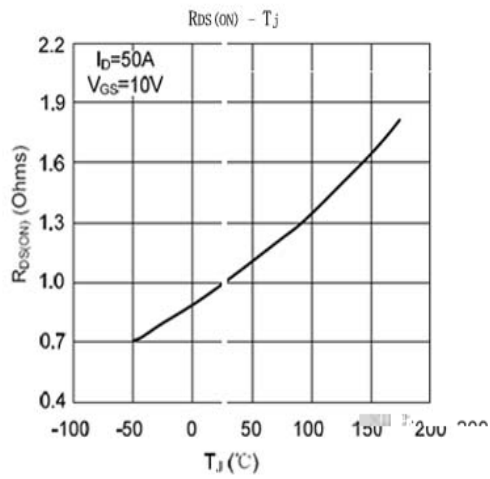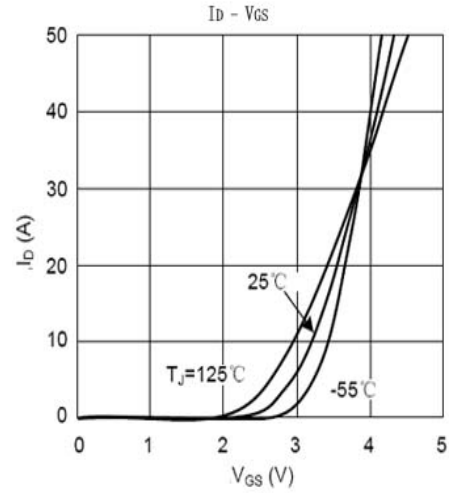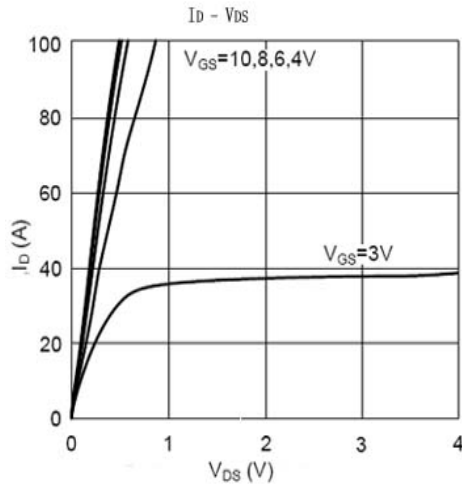

/ Package Dimensions

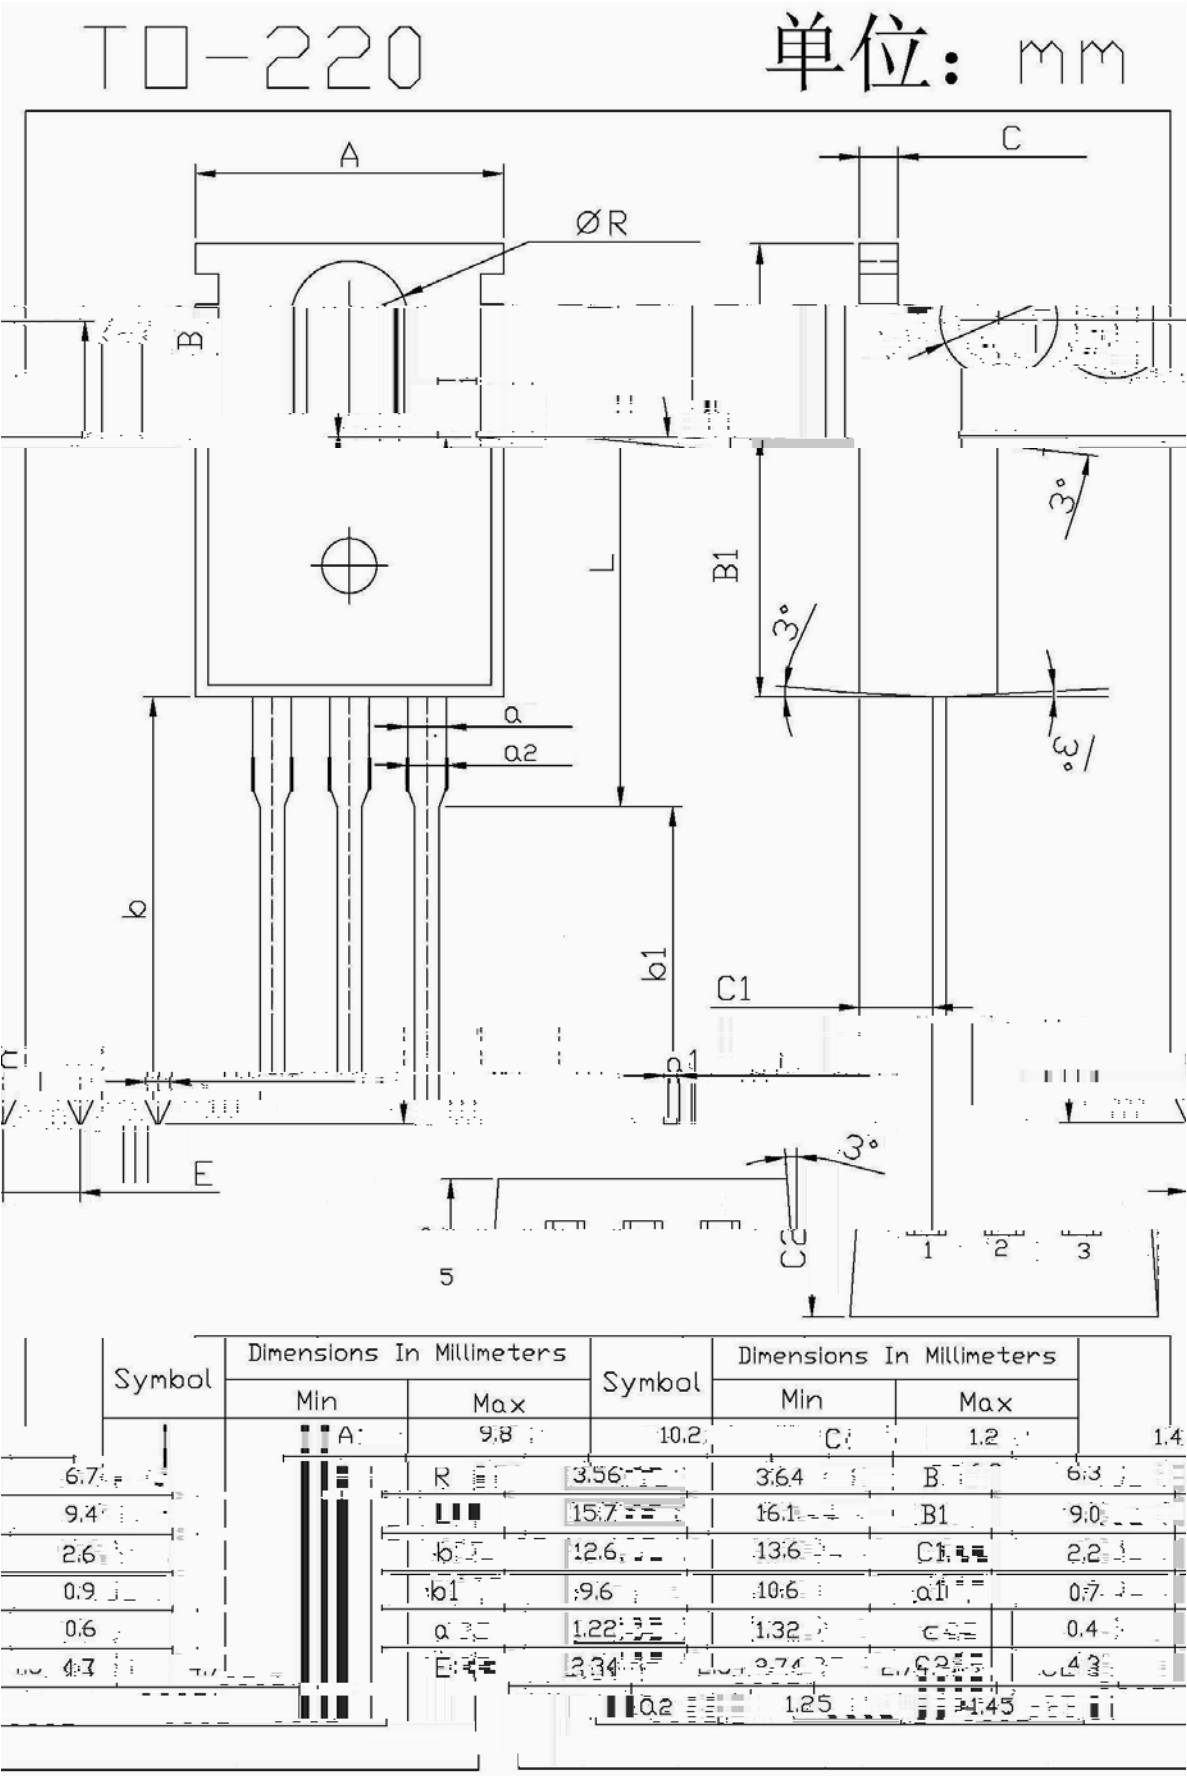

/ Marking Instructions

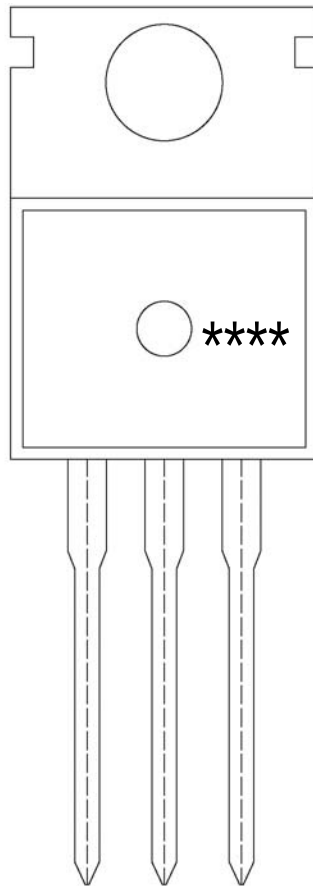

100N03
