

/ Descriptions

N

/ Features


500V HBM

AEC-Q101


HBM , Qualified to AEC-Q101 Standards for High Reliability,
HF Product.

/ Applications

/ Equivalent Circuit



/ Pinning

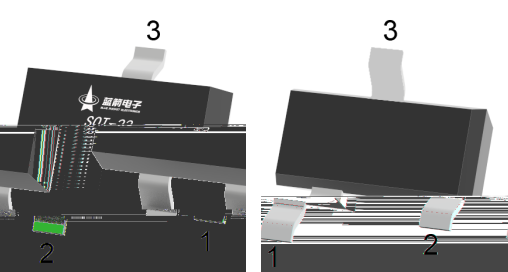

/ Marking


--	--



≤ μ ≤

		μ				
		μ				
						Ω
						μ
						μ
		Ω				
			Ω			
			Ω			
			Ω			


/ Electrical Characteristic Curve

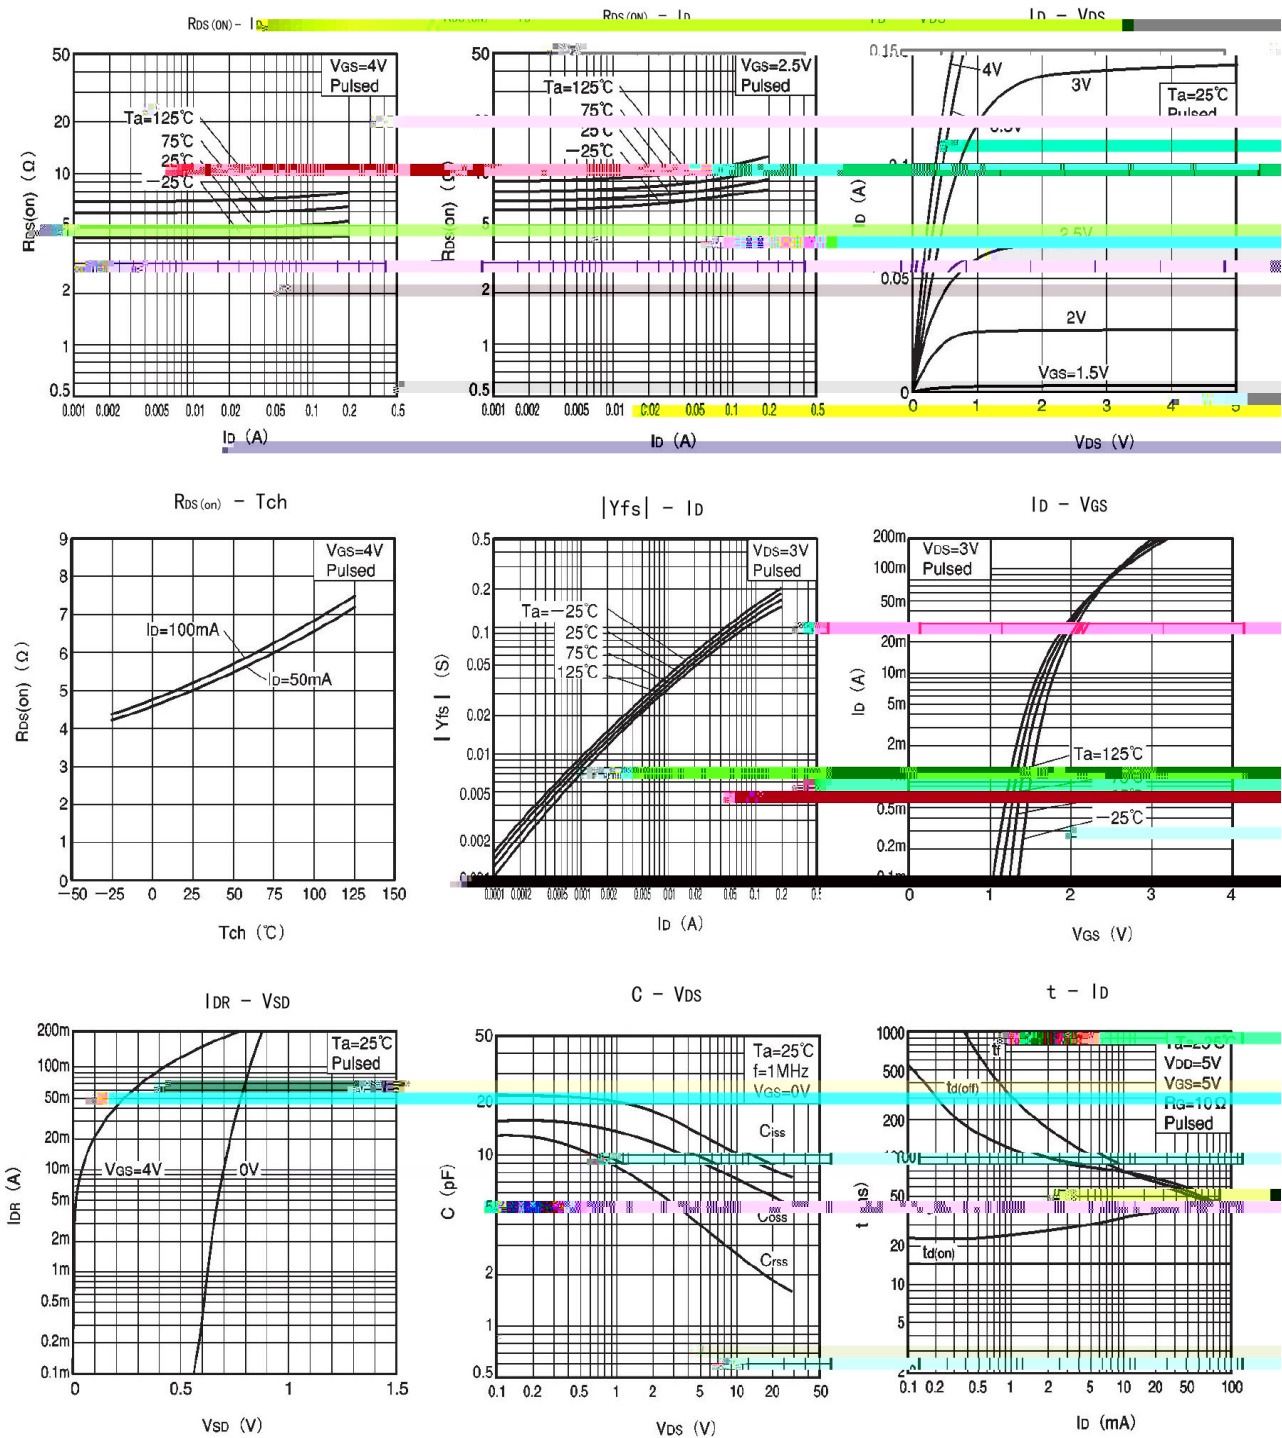


/ Package Dimensions

SOT-23

单位: mm

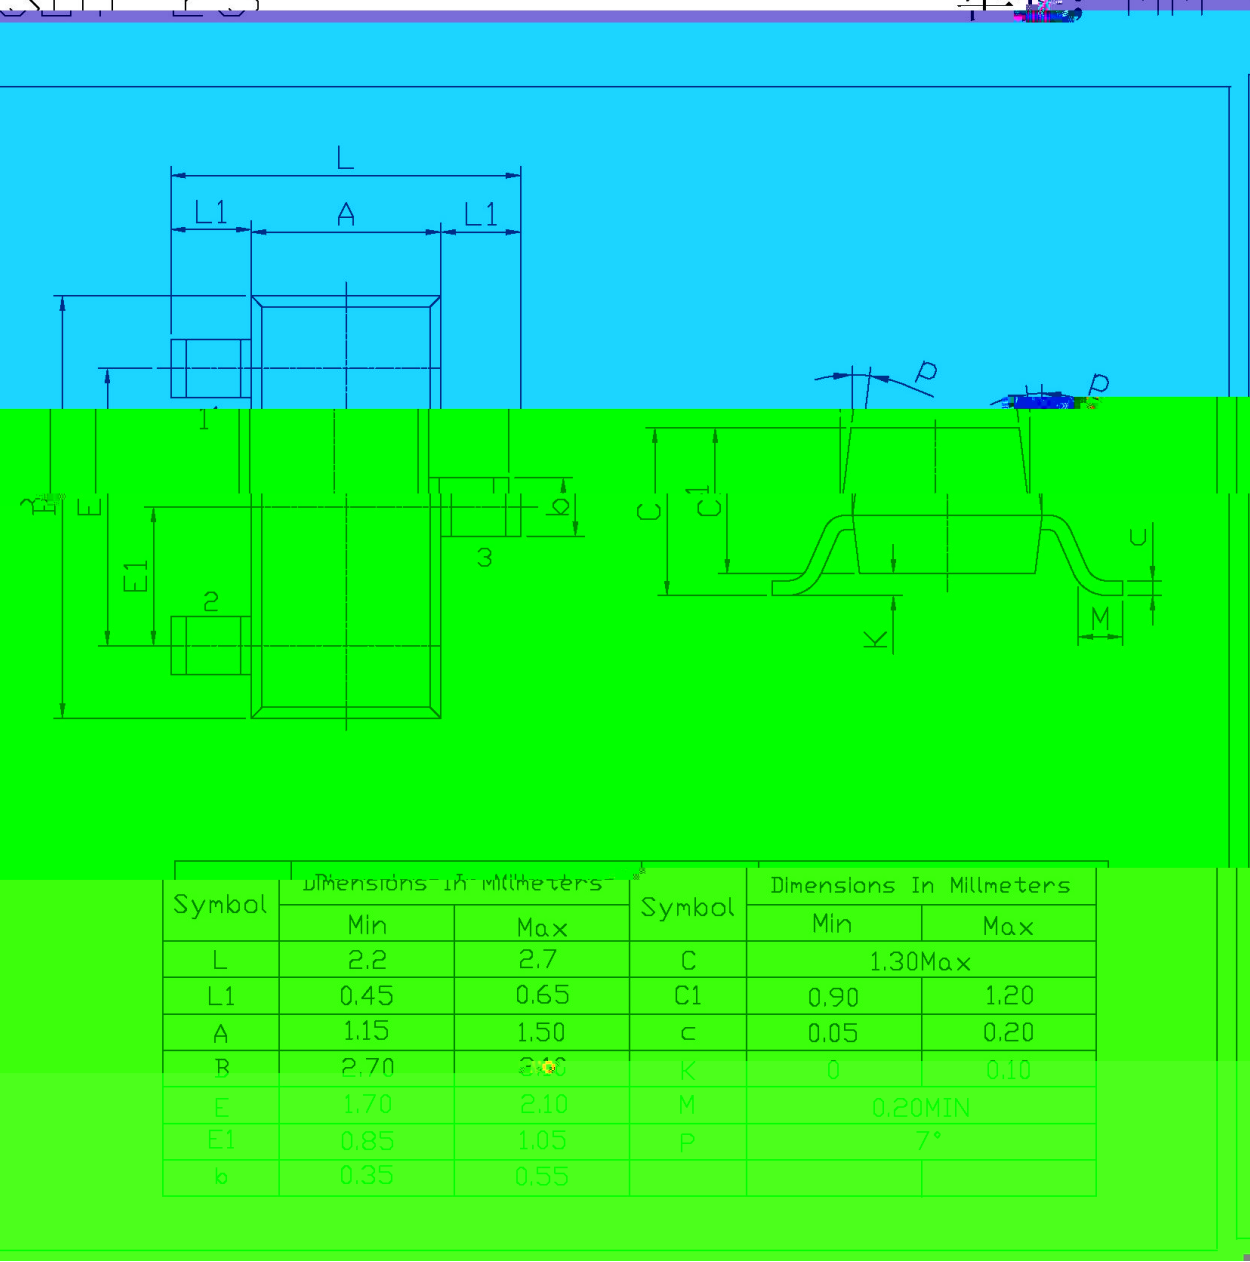

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

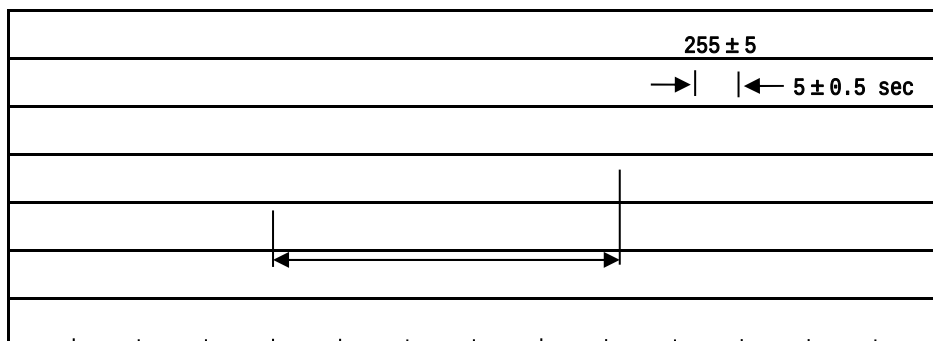
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$

/ Resistance to Soldering Heat Test Conditions

$$\frac{+}{-} \qquad \frac{+}{-} \qquad \frac{+}{-} \qquad \frac{+}{-}$$
/ **Packaging SPEC.**

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices