


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

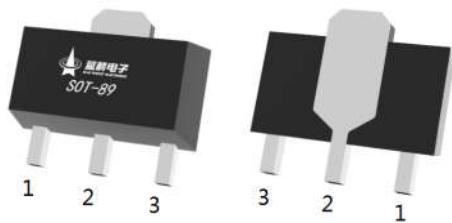

□

/ Marking

	**
--	----

/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃

/ Electrical Characteristics(Ta=25)

		℃				
		□	□			
	□	□	□			
		□	□			
		□	□			
		□				
	□	□			□	
		□	□			
		□				
	□				□	
		□				

δ

δ □

BR3CG5350TA

□ □ □



DATA SHEET

/ Package Dimensions

SOT-89

单位：mm



Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.35	2.65	a2	0.30	0.50
L	3.878	4.478	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P	6°	
E1	2.80	3.20			
h	0.80	1.20			


BR3CG5350TA

□ □ □



DATA SHEET

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

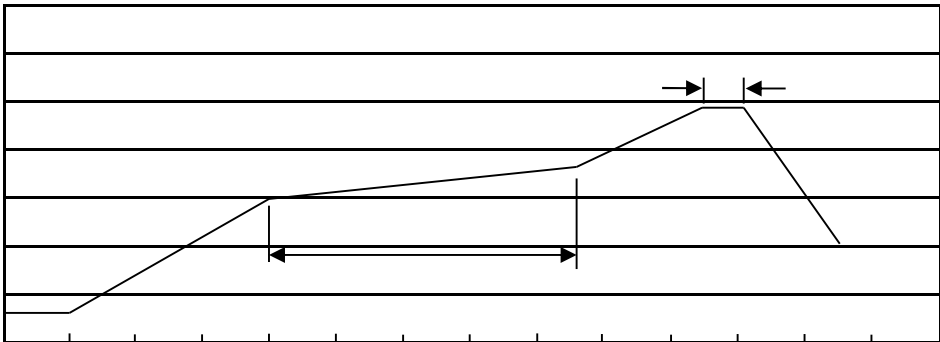

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7" ×12	180×120×180	390×385×205

/ Notices