



/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
	℃		



/ Electrical Characteristics(Ta=25)

		μ				
						μ
		℃				μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

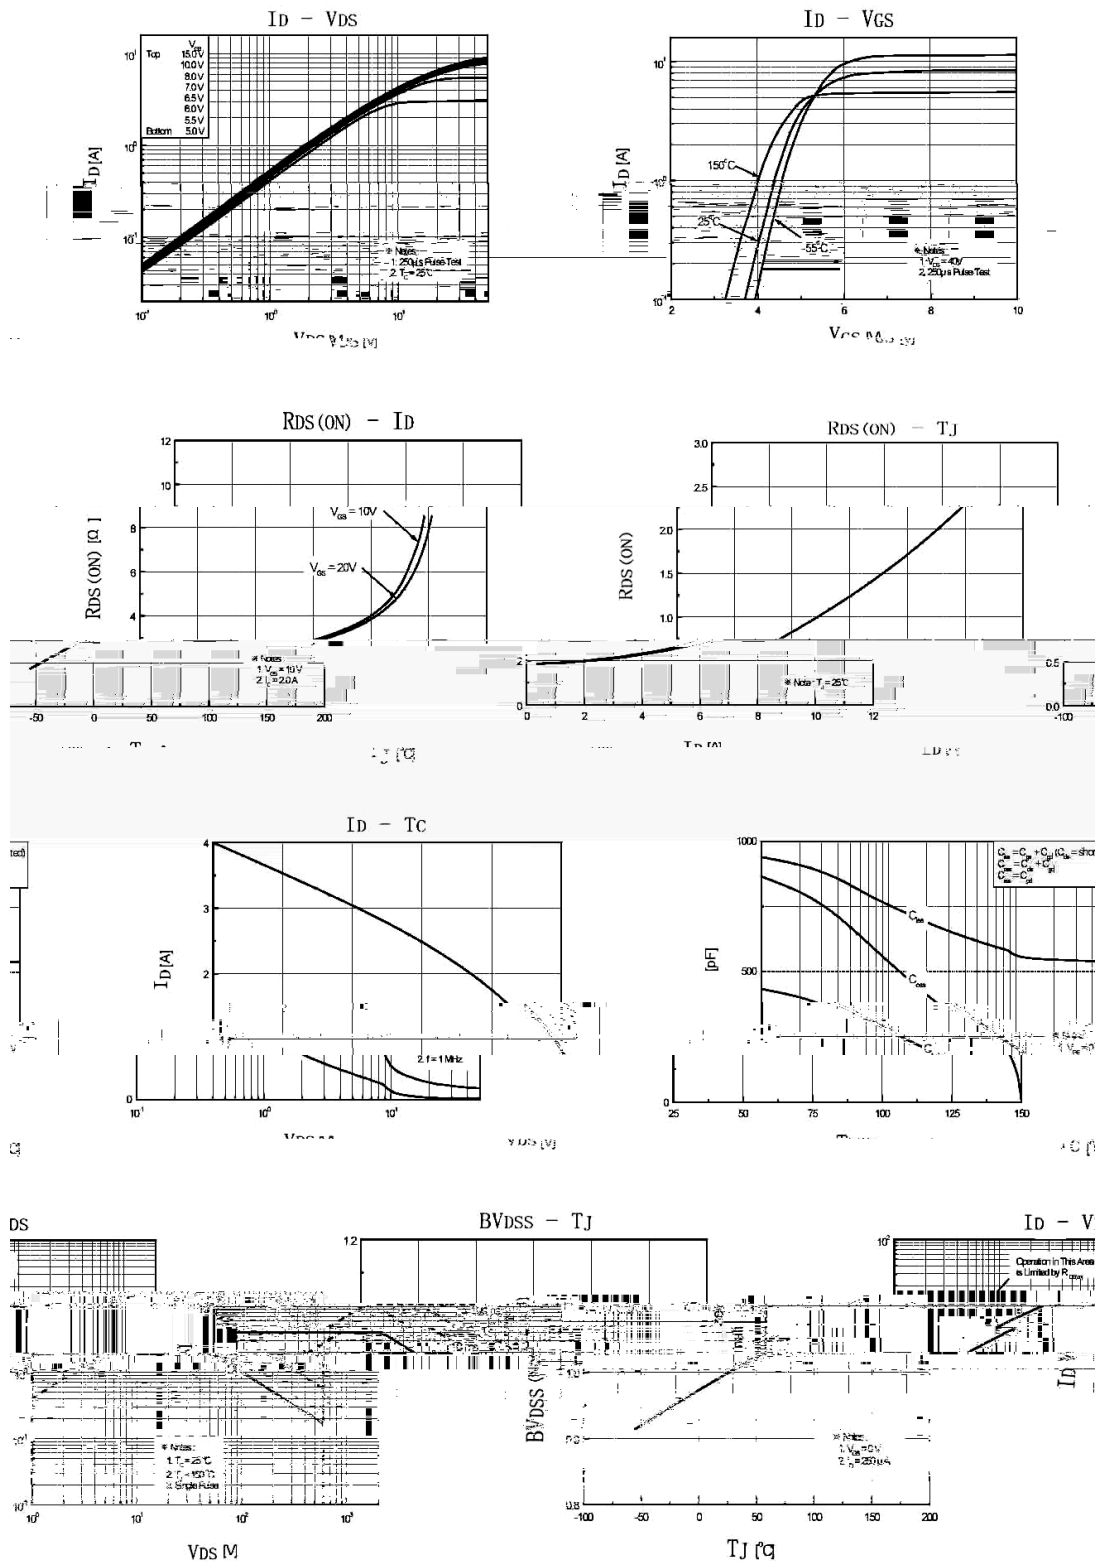


/ Package Dimensions

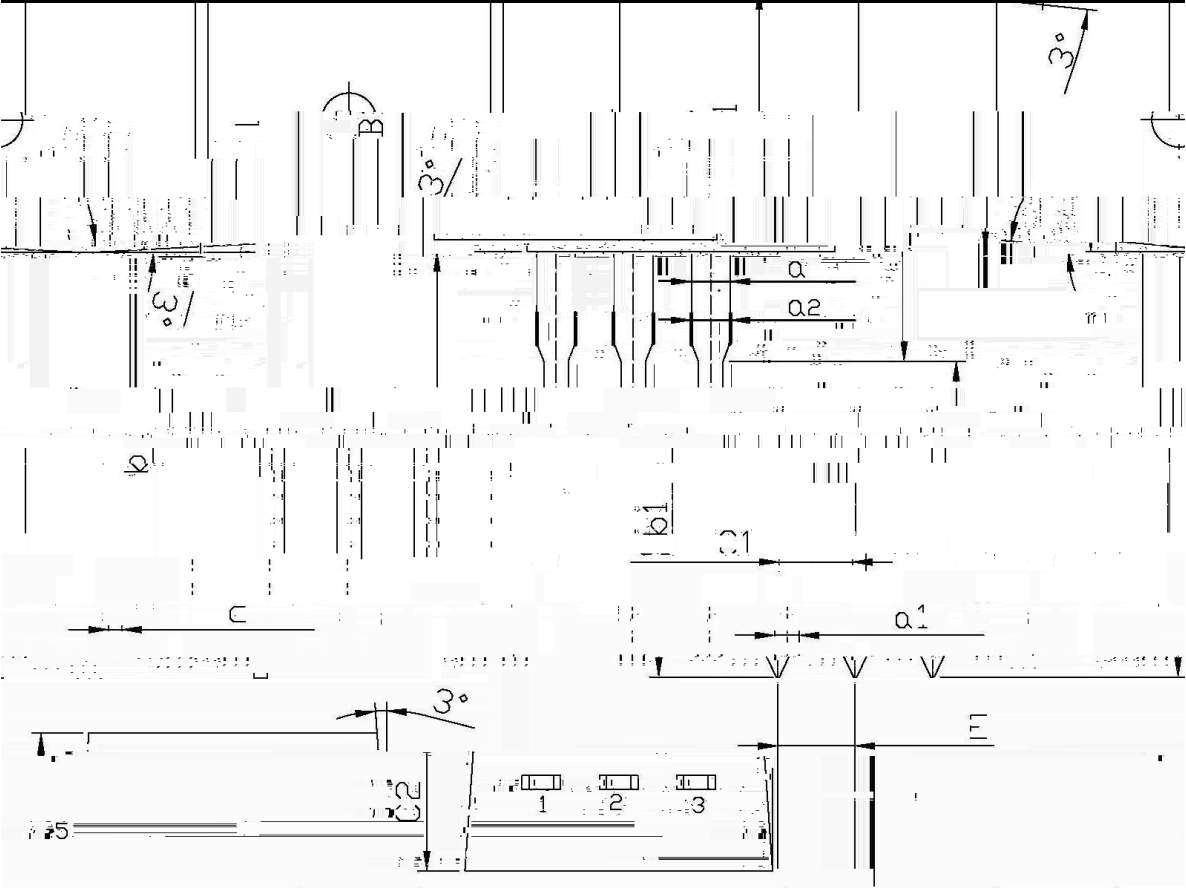


Dimensions In: Millimeters			Dimensions In: Millimeters		
Symbol	Min	Max	Symbol	Min	Max
Δ	9.8	10.2	C	1.2	1.4
R	3.56	3.64	Tb	6.3	6.7
L	15.7	16.1	B1	9.3	9.4
b	22.6	23.6	C1	2.2	2.6
b1	9.6	10.6	a1	0.7	0.9
d	1.77	1.83	E	22.34	22.44
a2	1.25	1.45			

/ Marking Instructions

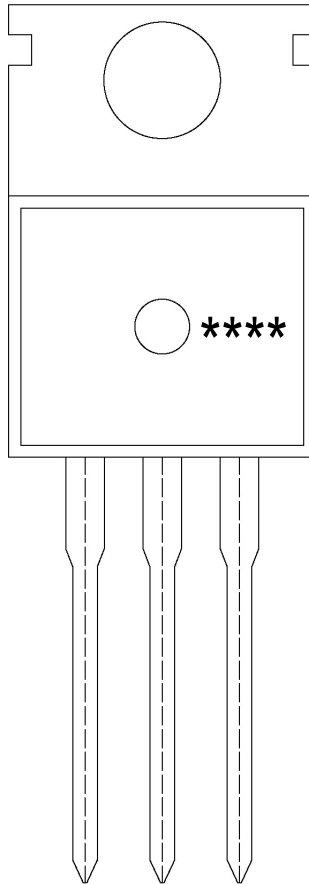

() / Temperature Profile for Dip Soldering(Pb-Free)

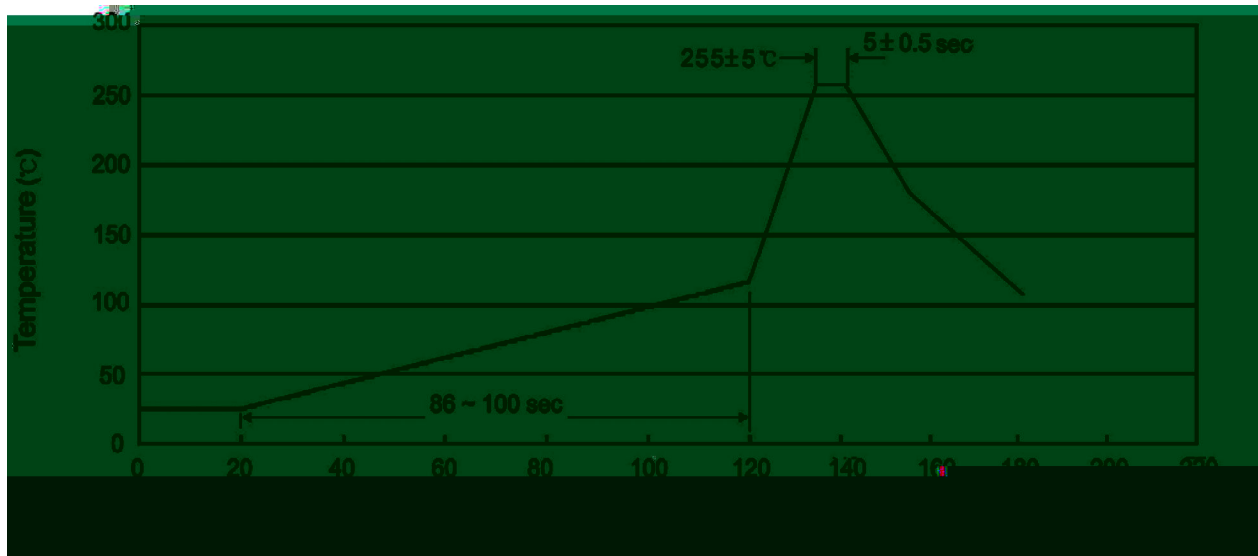

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.