

/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit



/ Pinning

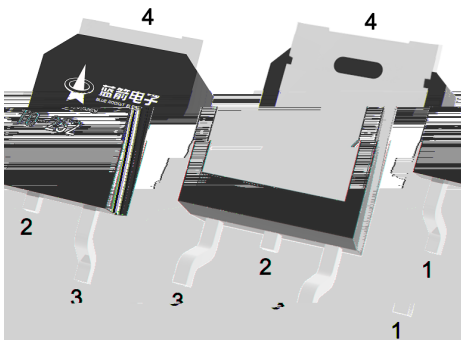

/ Marking



/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25)

		≤				
						μ

/ Electrical Characteristic Curve

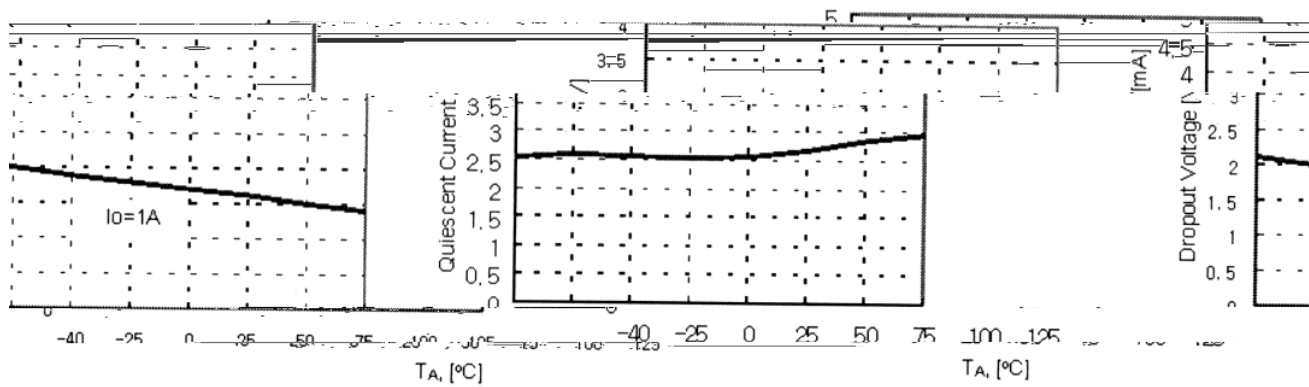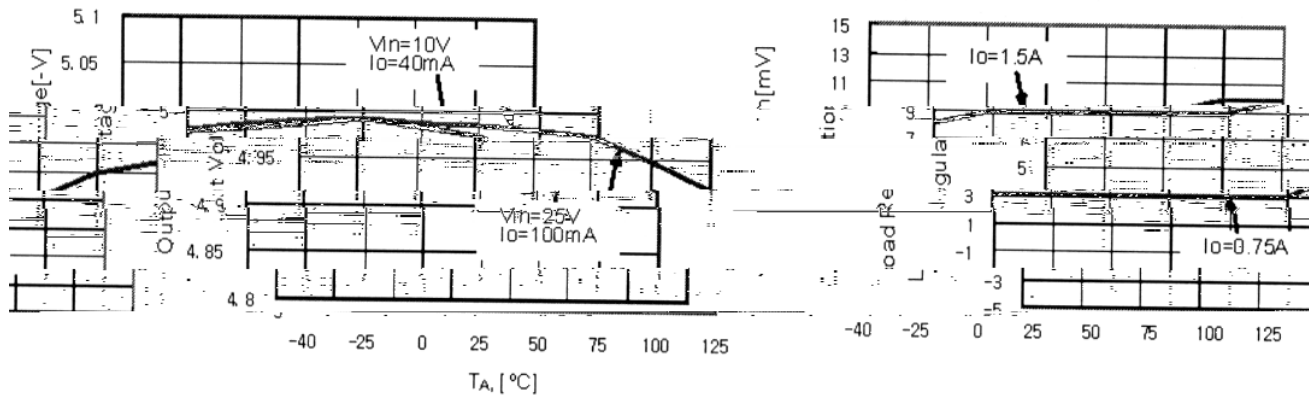

/ Package Dimensions

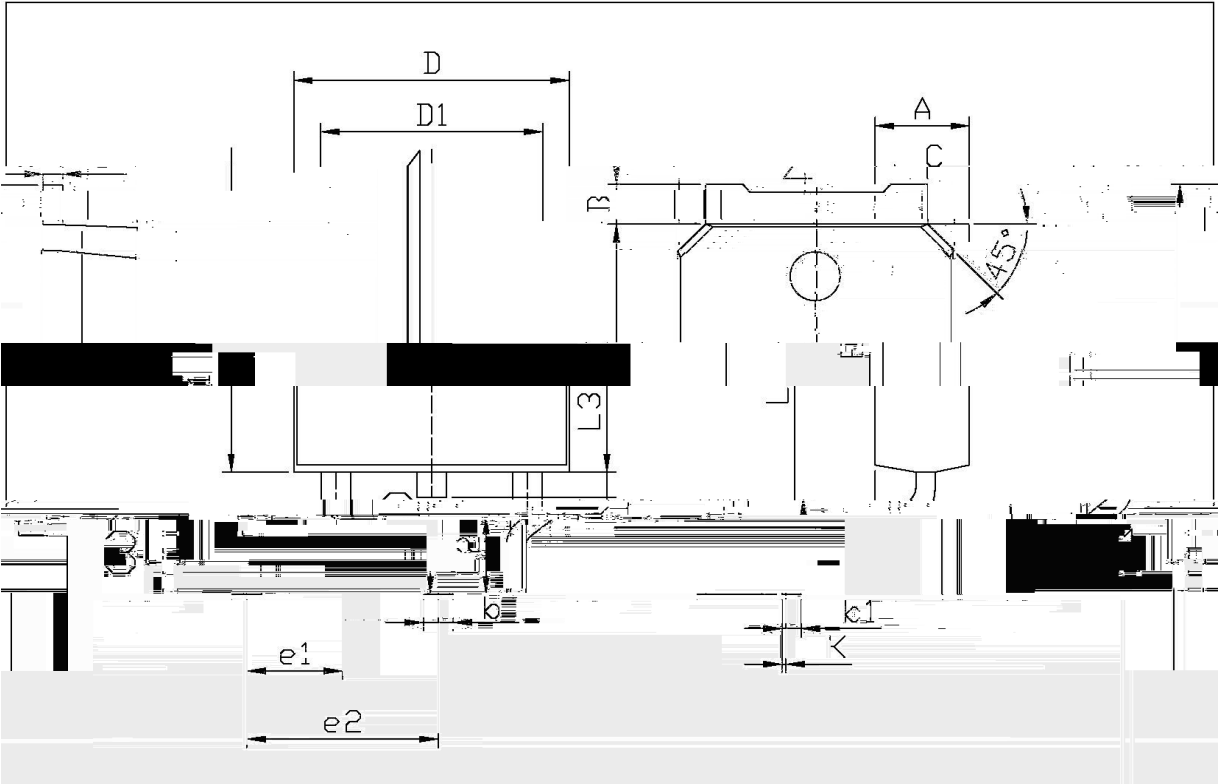


单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	6.25	6.75	B	2.40	2.95
C	0.95	1.25	D	2.34	2.84
D1	0.70	0.90	e1	4.43	4.73
L1	0.55	0.85	L3	10.35	10.45
L2	0.45	0.55	b1	0.45	0.55
K	6.45	6.75	p1	0.60	0.90
	5.10	5.50	D1	0.00	0.10

TQ=252


/ Marking Instructions

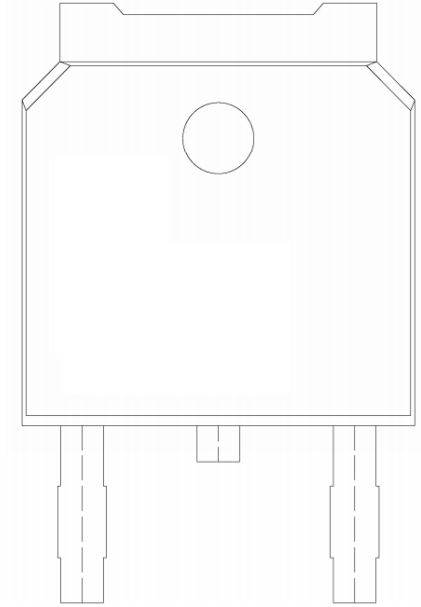

BR

79D05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

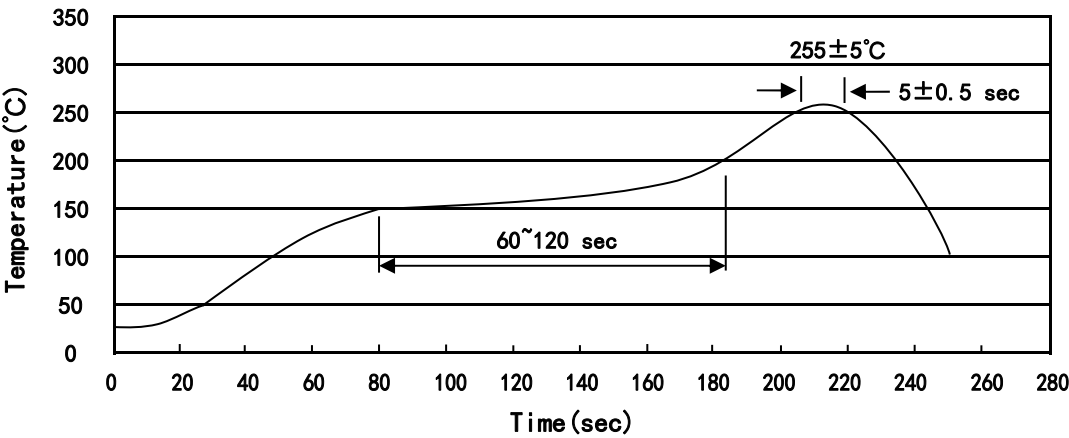

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices