


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

--	--

/ Absolute Maximum Ratings(Ta=25)


	θ		$^{\circ}\text{C}$

/ Electrical Characteristics(Ta=25)


		μ				
$^{\circ}\text{C}$						μ
$^{\circ}\text{C}$						μ
		μ				
						Ω
						Ω
		Ω	Ω			

$\leq$
 $\leq \mu$
 $\leq$

/ Electrical Characteristic Curve

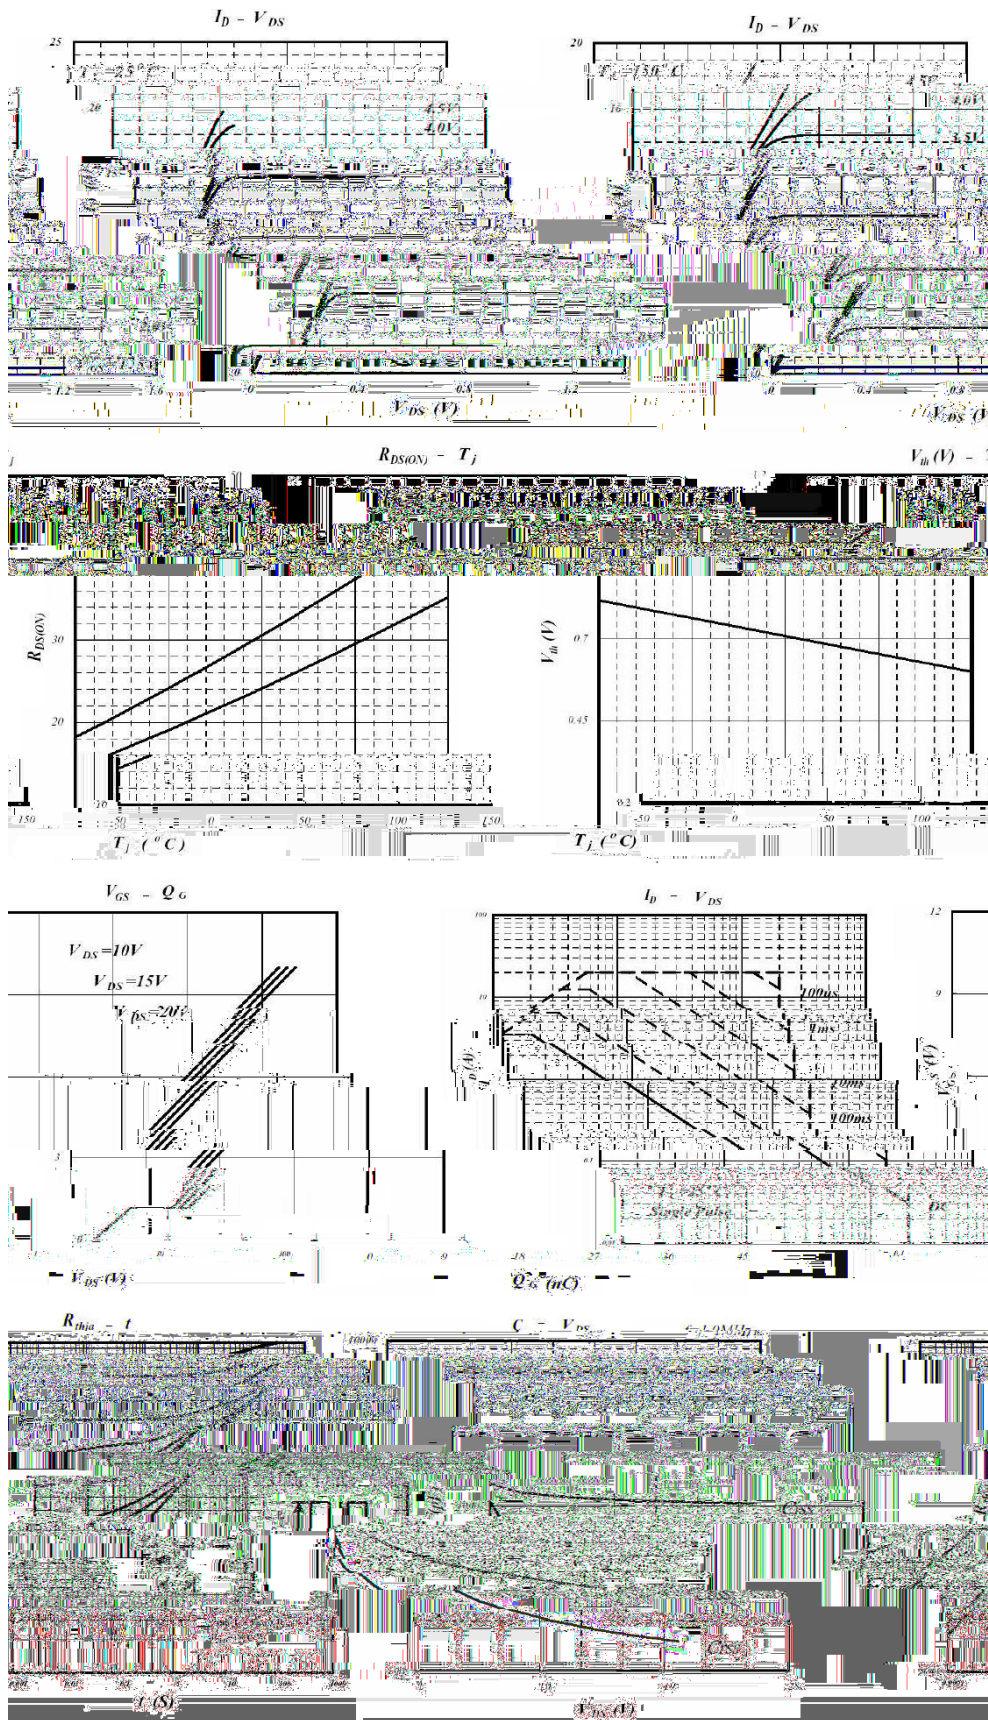

/ Package Dimensions

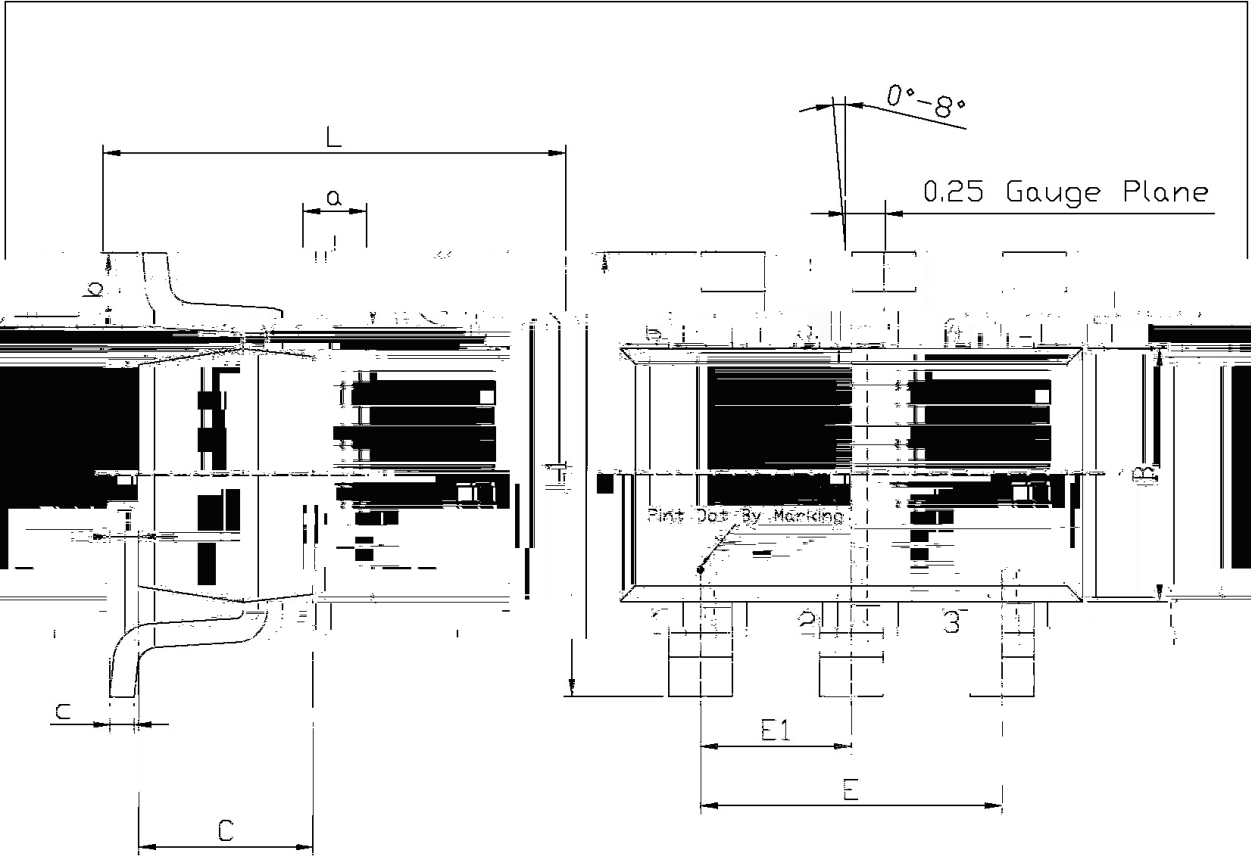


Unit: mm

Dimensions In Millimeters	
Min	Max
0.85	1.05
0.35	0.50
0.10	0.20
0.35	0.55
0	0.15


Symbol	Dimensions In Millimeters		Symbol
	Min	Max	
L	2.82	3.32	E1
B	1.50	1.70	a
C	0.90	1.30	c
L1	2.60	3.00	b
E	1.80	2.00	F

SOT23-6

/ Marking Instructions

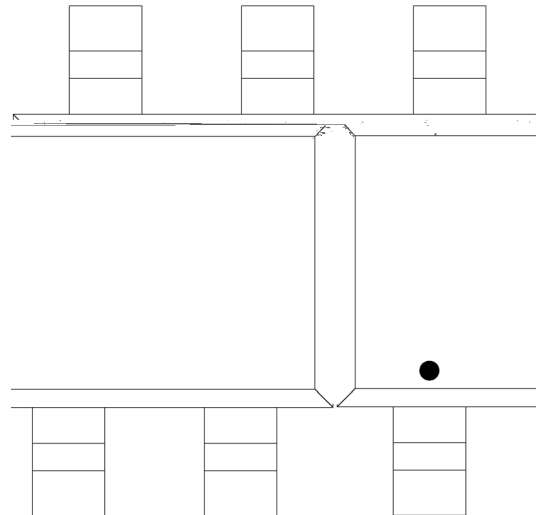

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

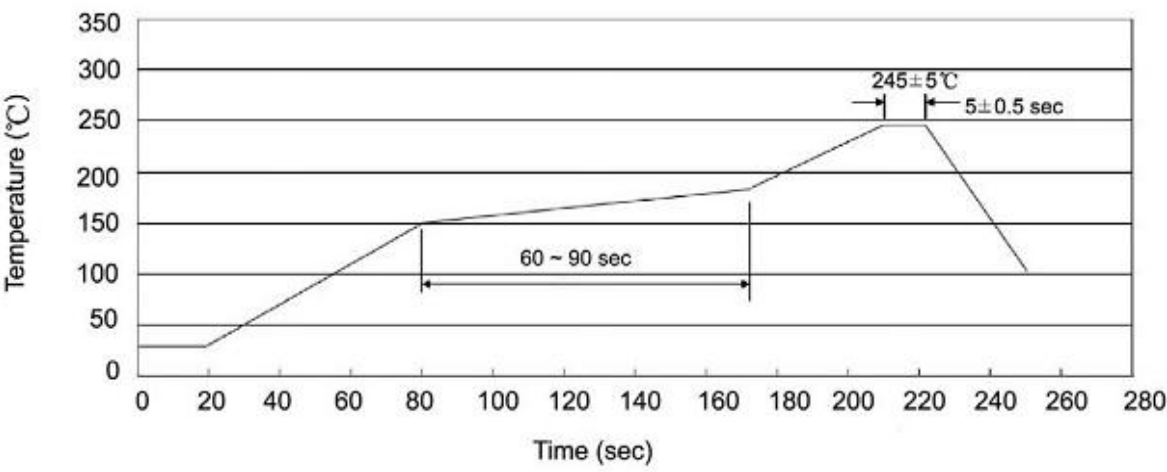

/ Resistance to Soldering Heat Test Conditions

℃