


/ Descriptions

/ Features


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking



	℃		
	℃		
	℃		

		μ				
						μ
		℃				μ
						μ
		μ				
						Ω

/ Electrical Characteristic Curve

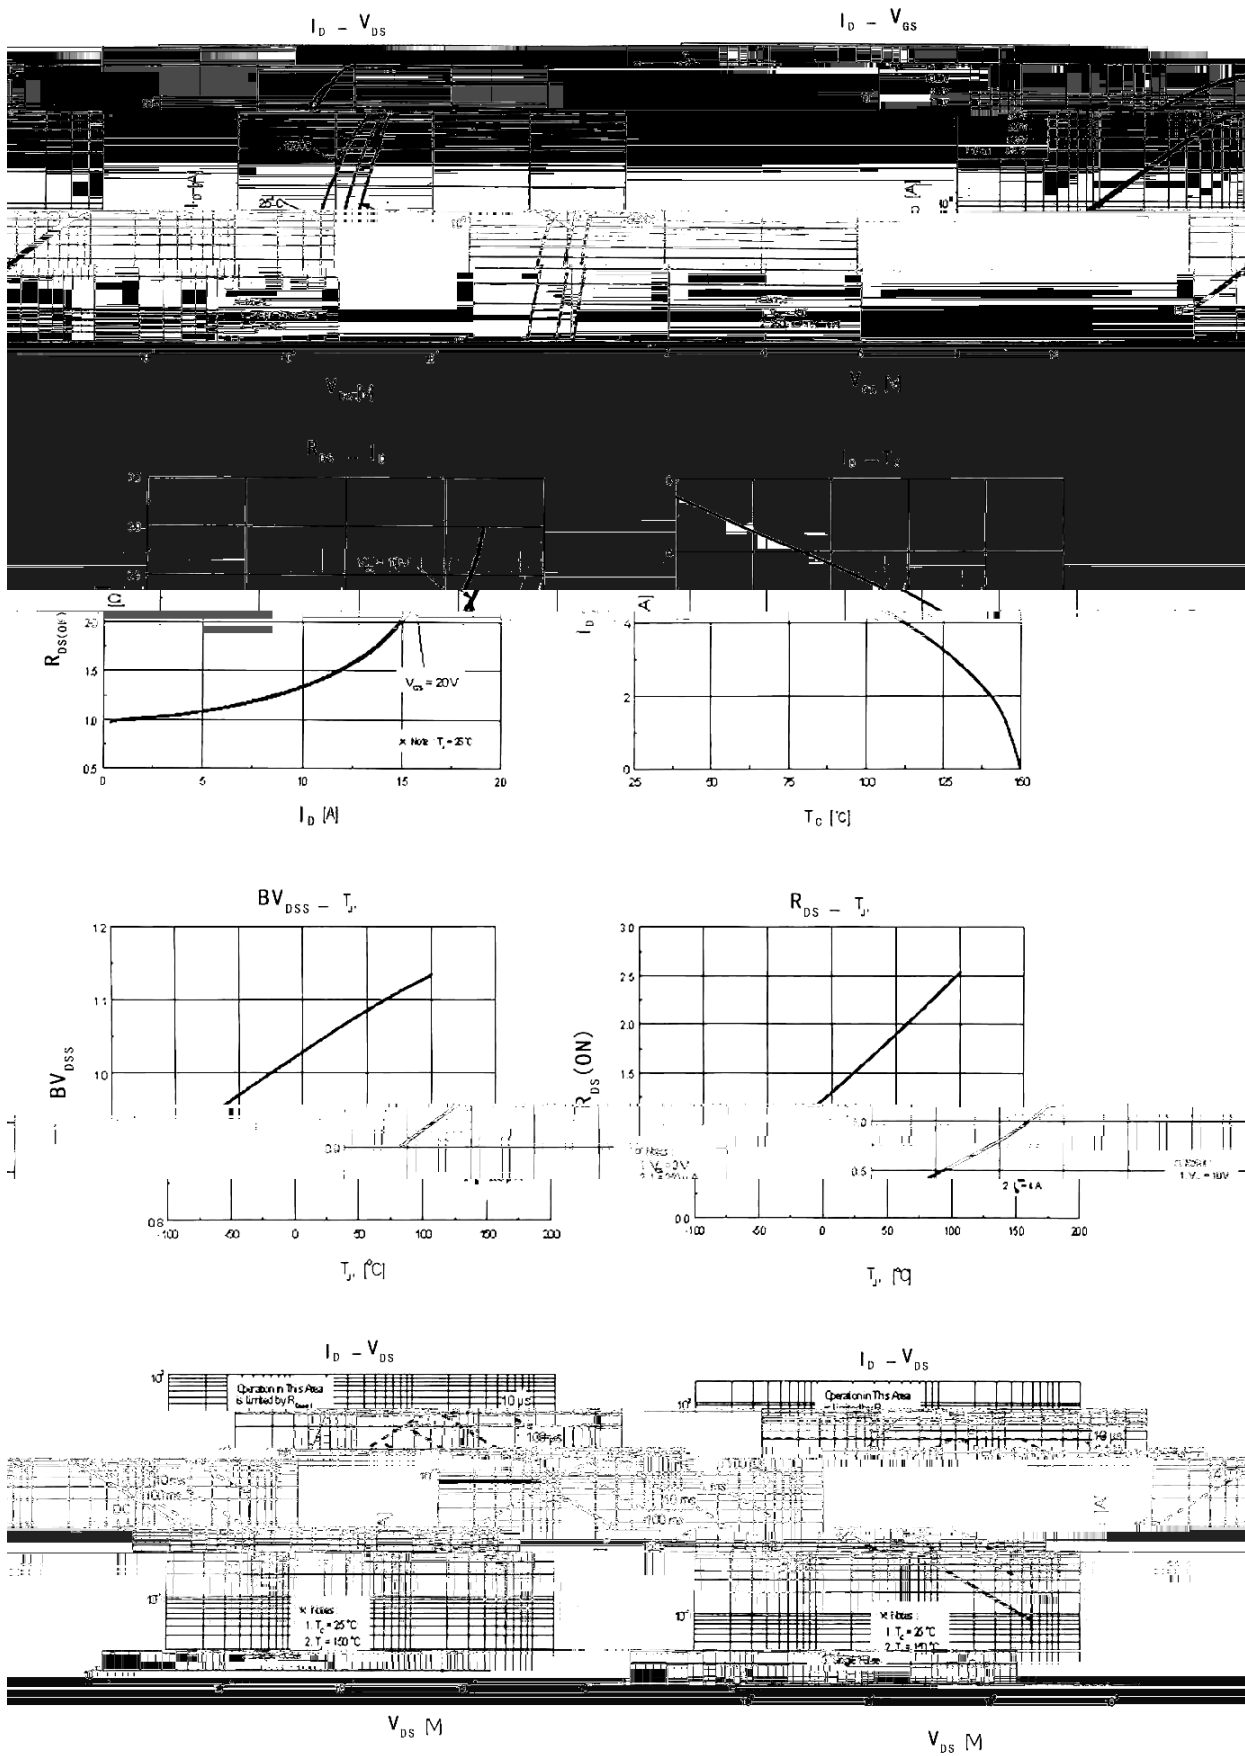

/ Package Dimensions

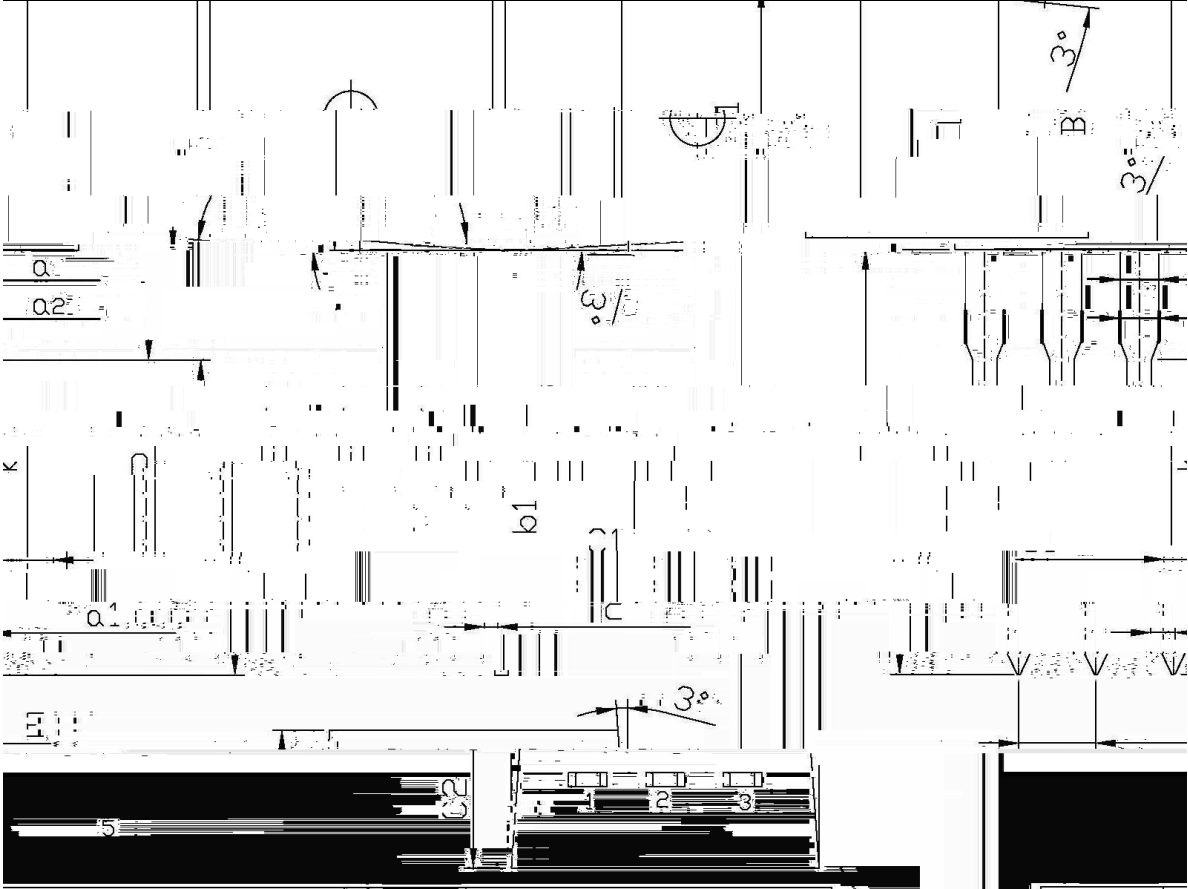


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
Δ	9.8	10.2	C	1.2	1.4
Δ	2.54	3.00	D	6.3	6.5
E	15.7	16.1	B	9.0	9.4
b	12.6	13.6	C1	2.2	2.6
b1	9.6	10.6	a1	0.7	0.9
0.4	0.8	1.2	0.127	0.254	0.508
1.25	1.75	2.25	E	2.34	2.74
			0.2	1.25	1.45

/ Marking Instructions



8N60

() / Temperature Profile for Dip Soldering(Pb-Free)

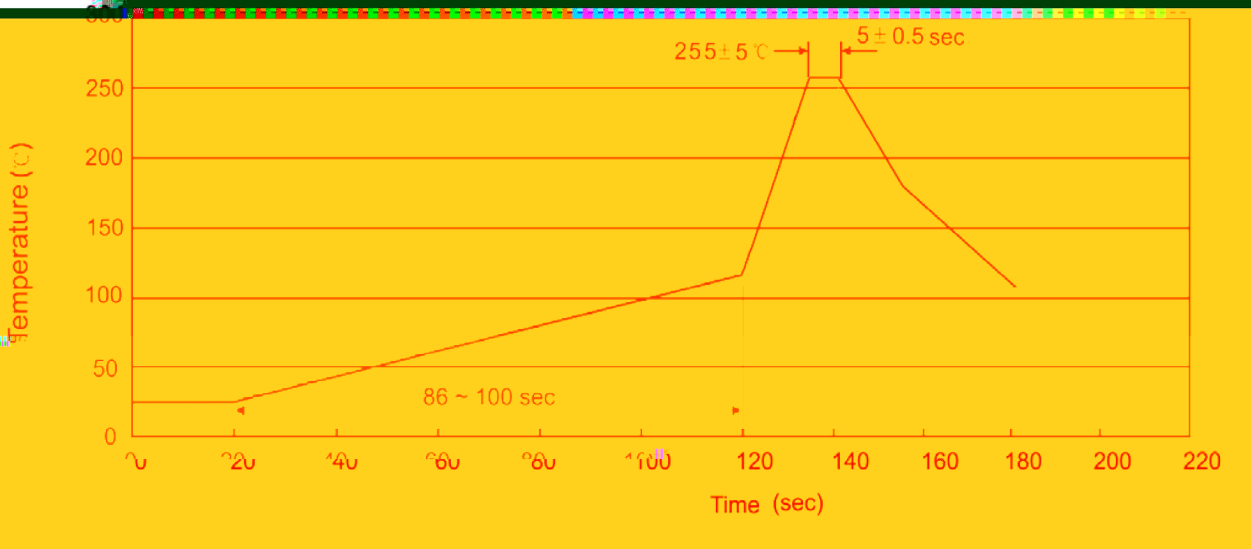

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices