



BRAD66225SA

/ Typical Application Circuit

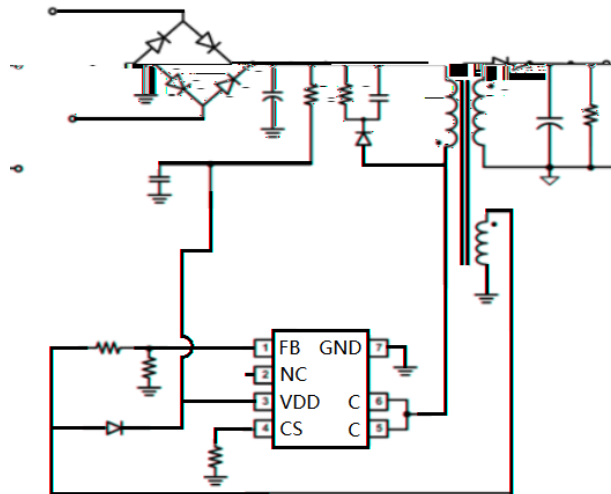


/ Pinning & Description

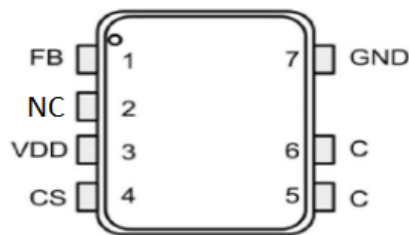

Pin Number	Pin Name	Description
1	FB	
2	NC	
	VDD	
	CS	
、	C	BJT
	GND	

/ Block Diagram

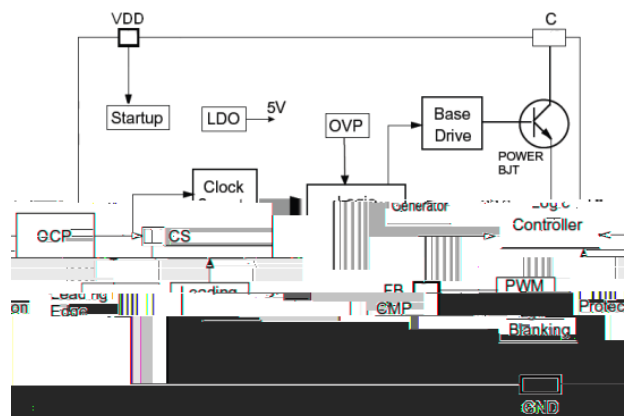

/ Absolute Maximum Ratings(Ta=25)

Parameter	Value	Unit
		℃
		℃
		℃
		℃
		℃


1

/ Electrical Characteristics(Ta=25 VDD=20V if not otherwise noted)


Supply Voltage Section(VDD Pin)						
		()				
Control Function Section (FB Pin)						

Current Sense Input Section (CS Pin)						
Power BJT Section (C Pin)						


/ Functional Description

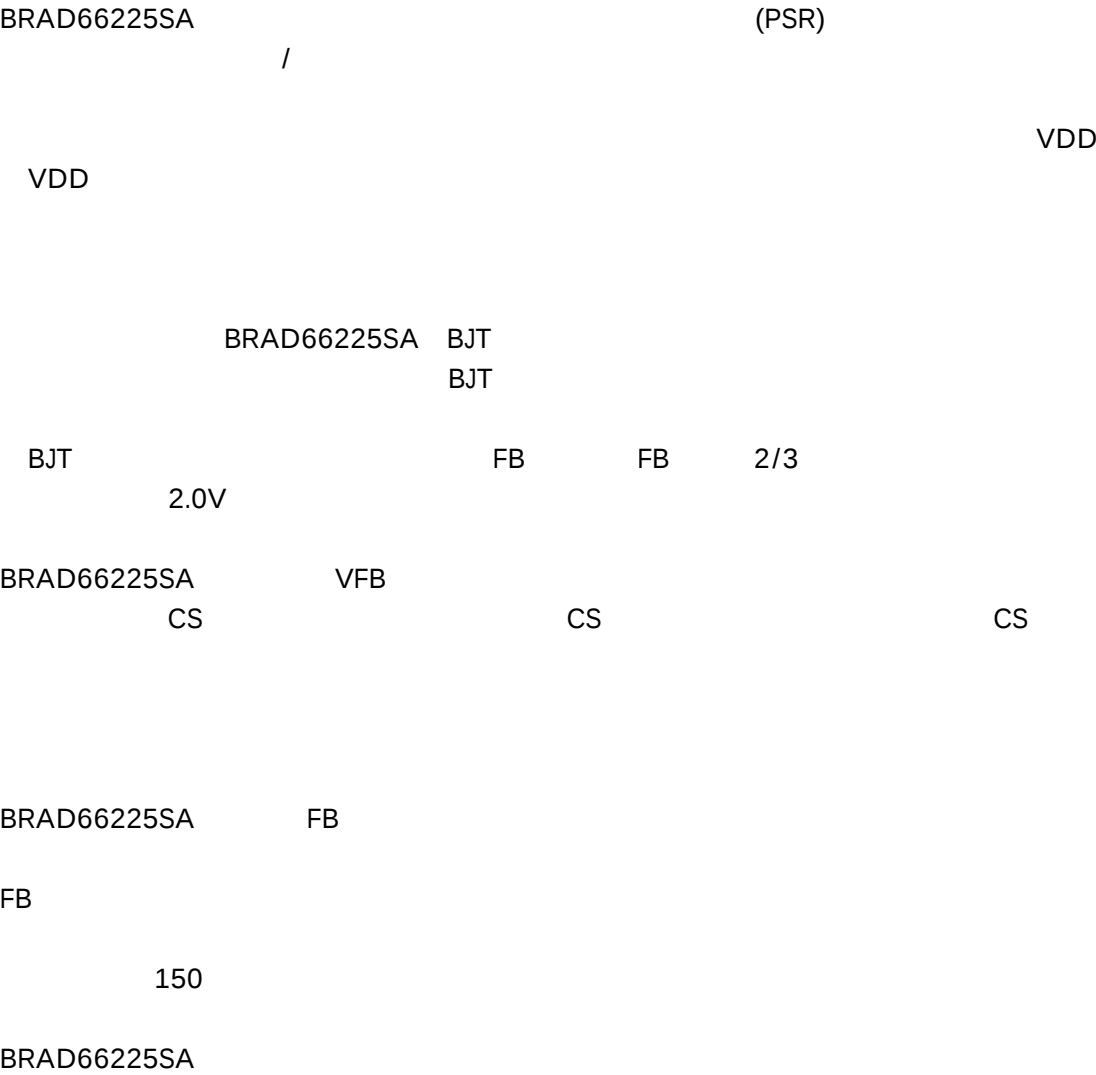

/ Package Dimensions

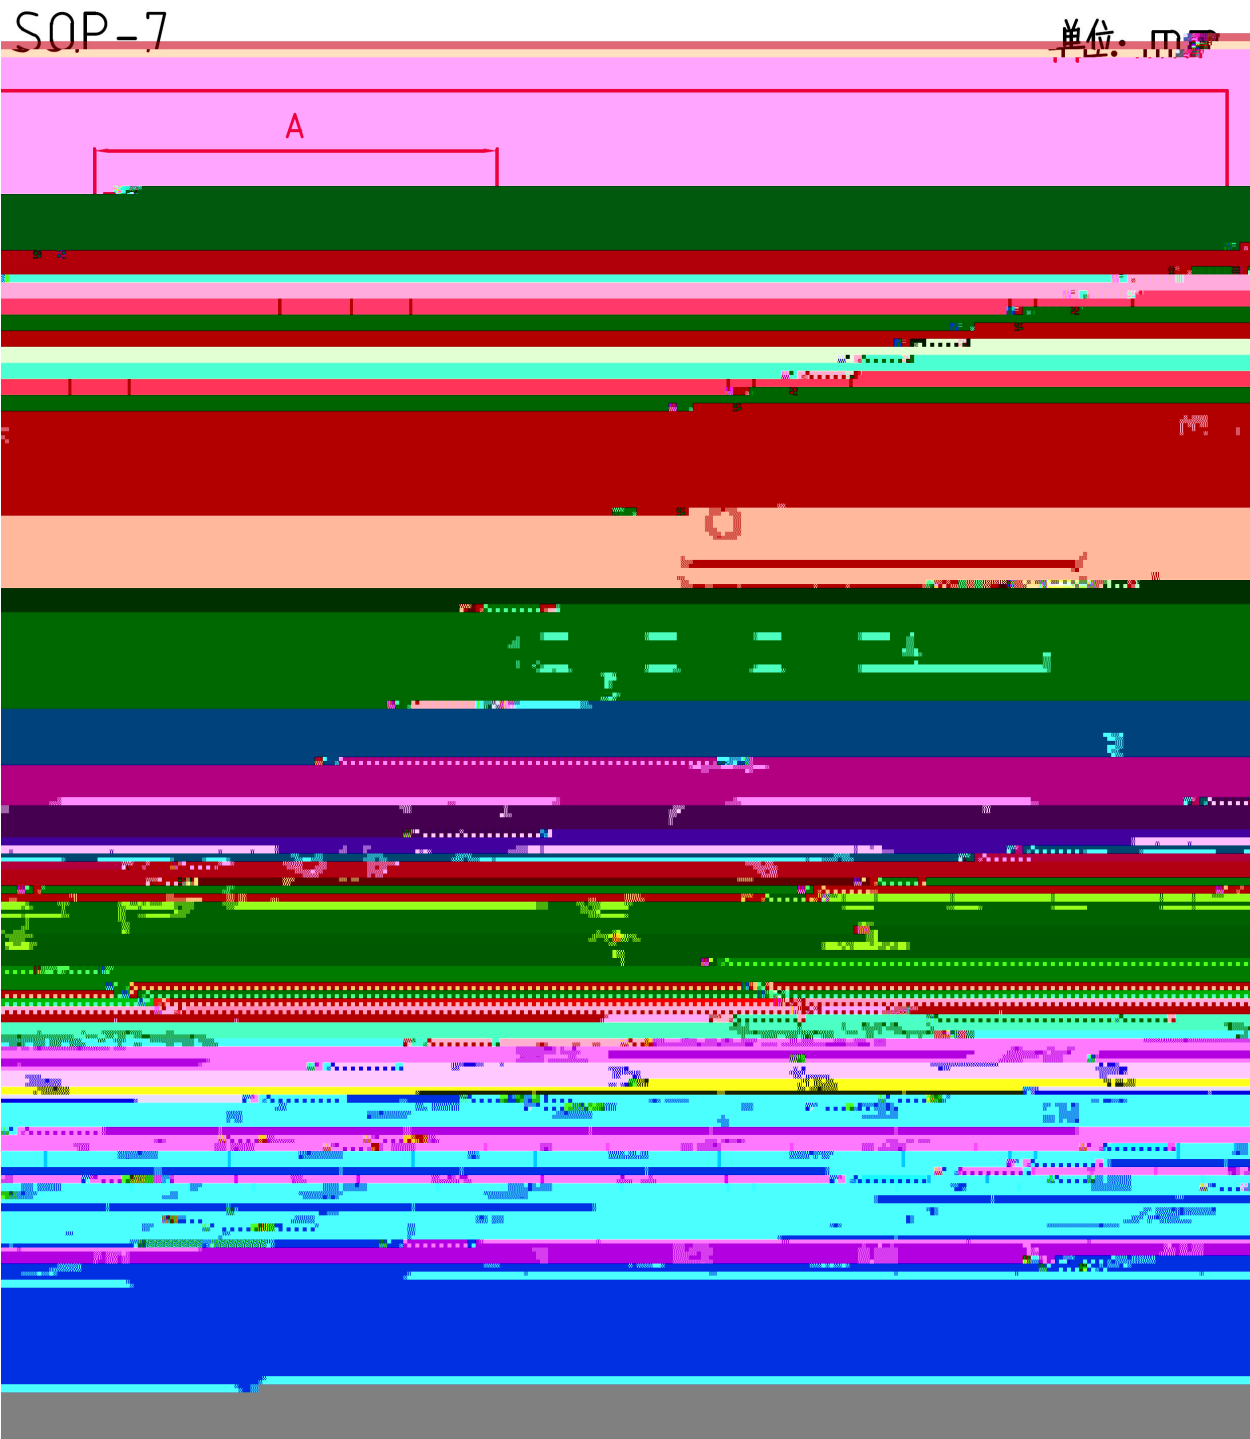

/ Marking Instructions

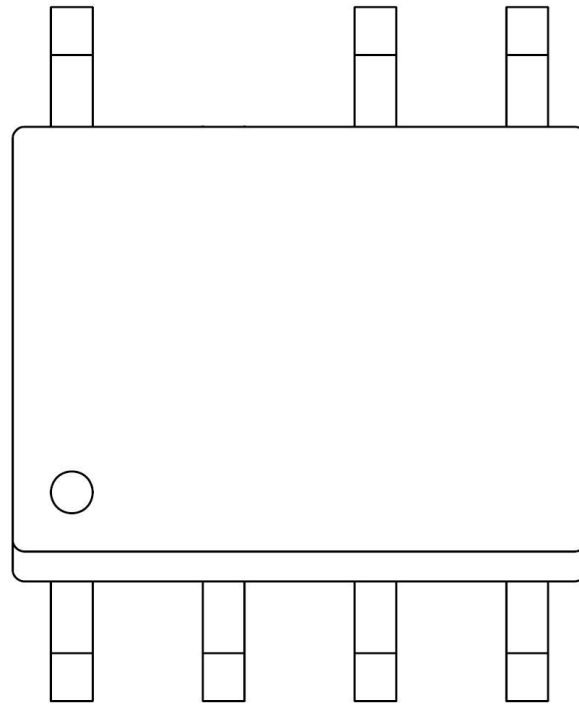

BR

66225C

****.

66225D

66225E

The graph plots Temperature (°C) on the y-axis (0 to 350) against Time (sec) on the x-axis (0 to 280). The temperature profile is as follows:

Time (sec)	Temperature (°C)	Notes
0 - 20	25	Initial temperature
20 - 80	25 to 150	Heating phase
80 - 170	150	Dwell time: 60 ~ 90 sec
170 - 220	150 to 245 ± 5	Heating phase to peak
220 - 250	245 ± 5 to 100	Cooling phase: 5 ± 0.5 sec

 $\pm$

°C

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
	4,000	2	8,000	6	48,000	13"		

7 7