

/ Descriptions

In a SOP-7 Plastic Package ,BRAD76225SA is a high performance Primary Side Regulation (PSR) PWM power switch with high precision CV/CC control ideal for charger applications.

/ Features

- ◆ Built-in 800V Power BJT.
- ◆ Multi-Mode Control.
- ◆ Fast Dynamic Response.
- ◆ Built-in Dynamic Base Drive.
- ◆ Audio Noise Free Operation.
- ◆ $\pm 5\%$ CC and CV Regulation.
- ◆ Low Standby Power<75mW.
- ◆ Programmable Cable Drop Compensation (CDC) in CV Mode.
- ◆ Built-in AC Line & Load CC Compensation.
- ◆

Build in Protections: Short Load Protection(SLP) Cycle-by-Cycle Current Limiting(OCP) Leading Edge Blanking(LEB) On-Chip Thermal Shutdown(OTP) VDD OVP & UVP & Clamp.

- ◆ QR Quasi-Resonant mode of operation
- ◆ Halogen-free Product.

/ Applications

- ◆ Battery Chargers for Cellular Phones.
- ◆ AC/DC Power Adapter and LED Lightings.


/ Product Series

	230V	
BRAD76225CSA	7W	SOP-7
BRAD76225DSA	5W	SOP-7
BRAD76225ESA	3W	SOP-7


/ Marking

See Marking Instructions.

/ Typical Application Circuit

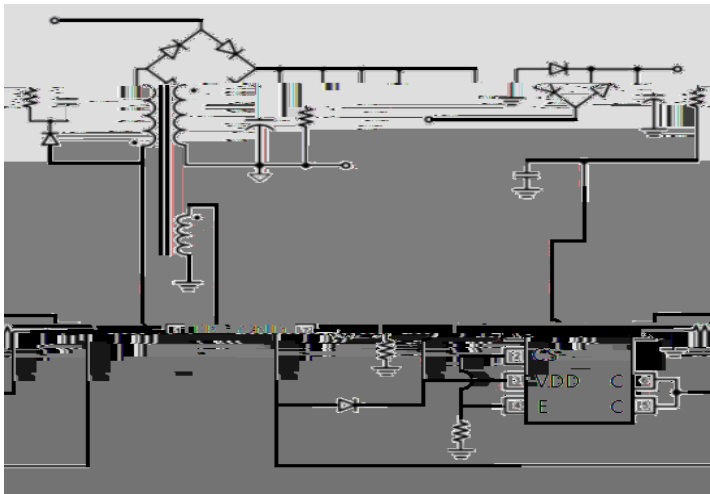


/ Pinning & Description

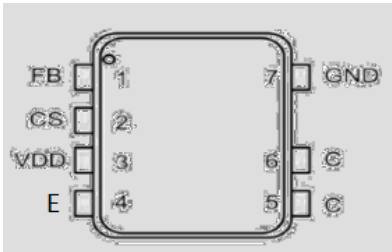

Pin Number	Pin Name	Description
4	E	
5 6		

/ Block Diagram

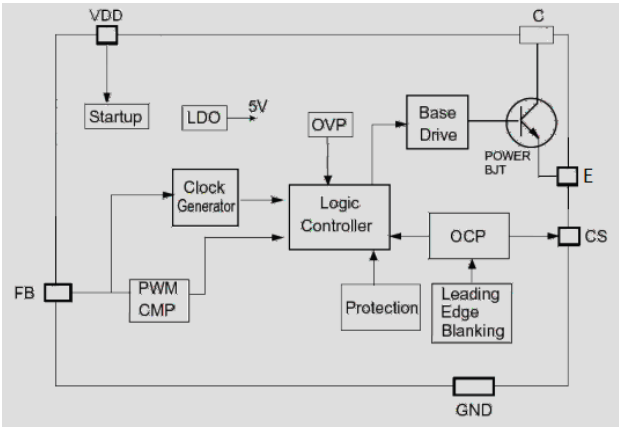

/ Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Parameter	Value	Unit
C Pin Voltage Range	-0.3 to 800	V
V_{DD} DC Supply Voltage	-0.3 to 27	V
CS Voltage Range	-0.3 to 6	V
FB Voltage Range	-0.3 to 6	V
Thermal Resistance Junction-ambient	95	$^{\circ}\text{C}/\text{W}$
Maximum Junction Temperature	150	
Operating Temperature Range	-40 to +125	
Storage Temperature Range	-65 to +150	
Lead Temperature (Soldering, 10sec.)	260	

Note 1: If the device operating conditions over the maximum rating of the above-mentioned conditions, may cause permanent damage to the device. The above parameters is only part of the operating conditions the maximum, we do not recommend the device running outside the scope of this specification. If the device to work long hours under the condition of absolute maximum limit, its stability may be affected.

/ Electrical Characteristics($T_a=25^\circ\text{C}$ $V_{DD}=20\text{V}$ if not otherwise noted)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Supply Voltage Section(V_{DD} Pin)						
Start-up current into VDD pin	I_{VDD_st}	$V_{DD_ON}-1\text{ V}$		3	20	μA
Operation Current	I_{VDD_Op}			0.8		mA
VDD Under Voltage Lockout Exit	V_{DD_ON}	VDD Rising	15	16	17	V
VDD Under Voltage Lockout Enter	V_{DD_OFF}	VDD Falling	3.8	4.2	4.6	V
VDD OVP Threshold	V_{DD_OVP}			26		V
Control Function Section (FB Pin)						
Internal Error Amplifier (EA) Reference Input	V_{FB}		1.975	2.0	2.025	V
Minimum OFF time	T_{off_min}			2		μs
Maximum frequency	F_{max}			100		KHz
Minimum frequency	F_{min}			350		Hz

/ Electrical Characteristics(Ta=25 VDD=20V if not otherwise noted)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Cable Drop Compensation (CDC) Current	$I_{\text{Cable_max}}$			45		uA
Current Sense Input Section (CS Pin)						
CS Input Leading Edge Blanking Time	T_{LEB}			350		ns
Minimum overcurrent protection threshold	$V_{\text{TH_OCPmin}}$			500		mV
Maximum overcurrent protection threshold	$V_{\text{TH_OCPmax}}$			550		mV
Power BJT Section (C Pin)						
Collector-Base Breakdown Voltage	V_{CBO}		800			V

/ Functional Description

/ Package Dimensions

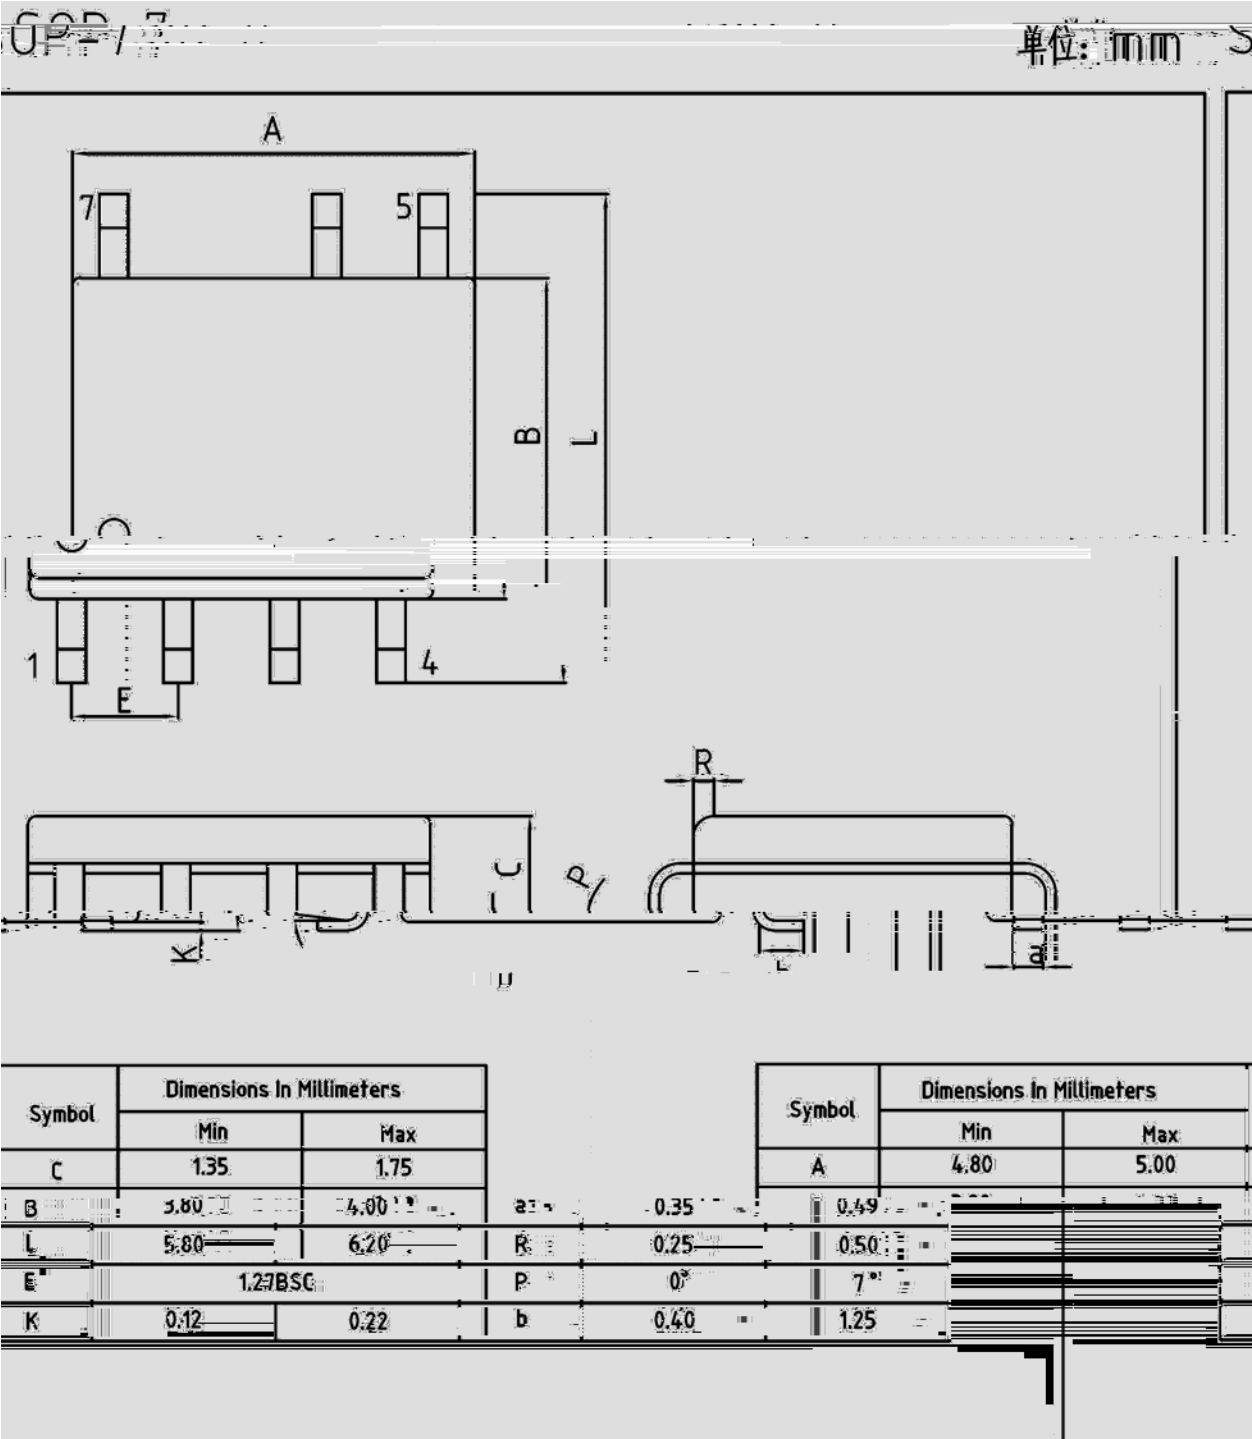

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

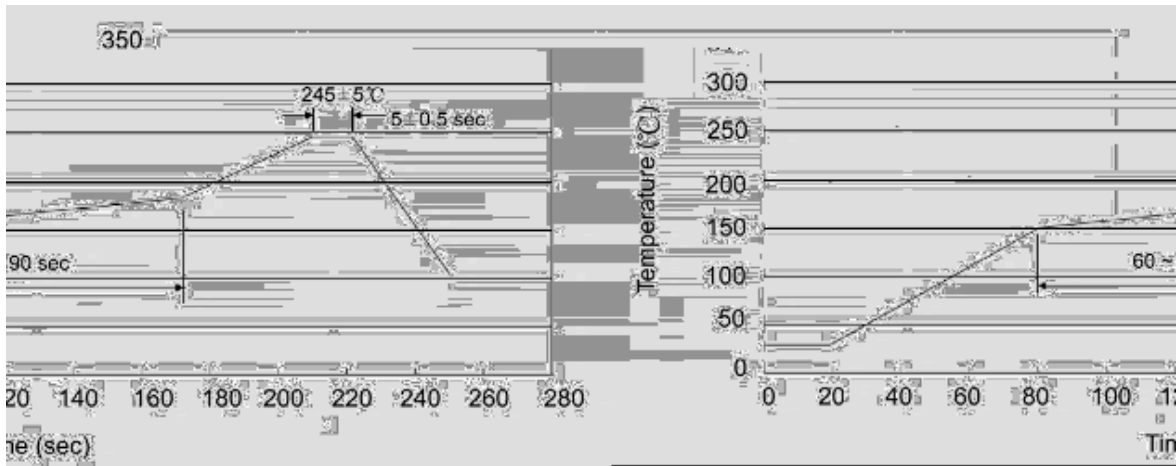

Note:

- 1

150 180

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:150~180

, Time:60~90sec.
- 2.Peak Temp.:245 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP-7	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices