


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking







/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
		Ω				

/ Electrical Characteristic Curve

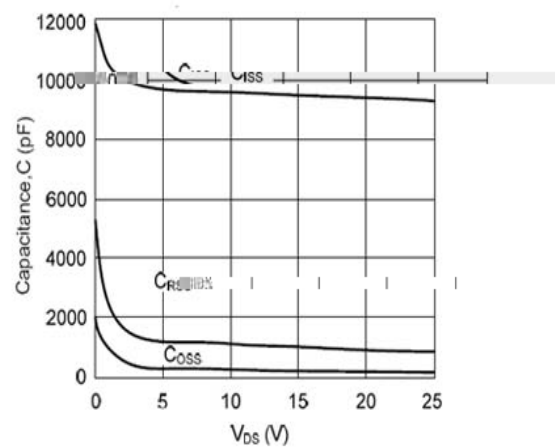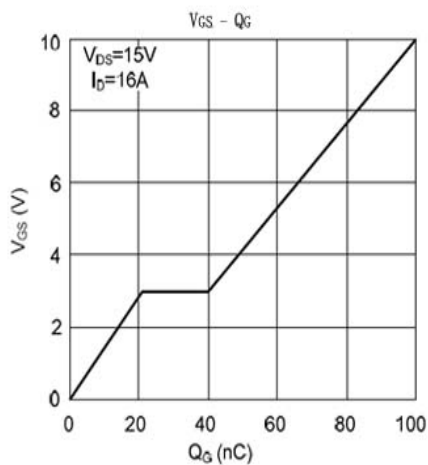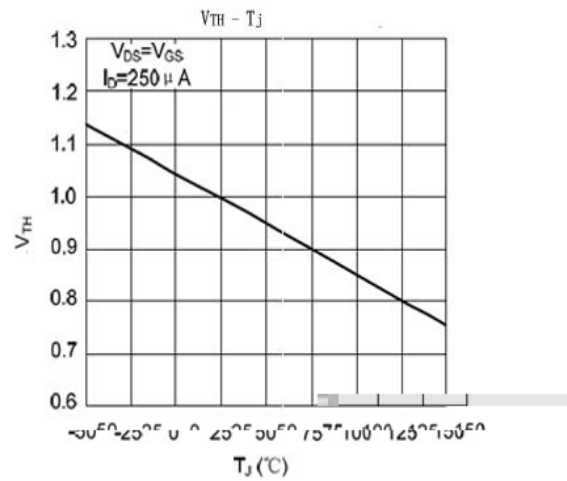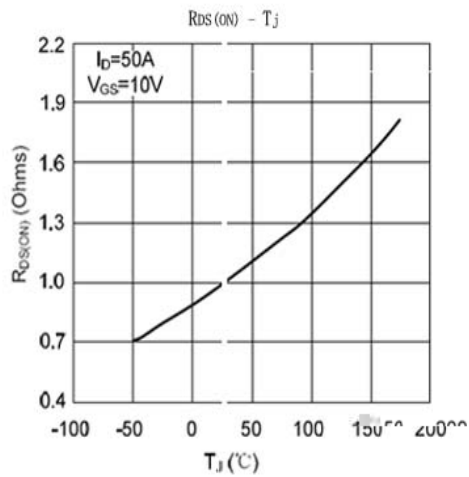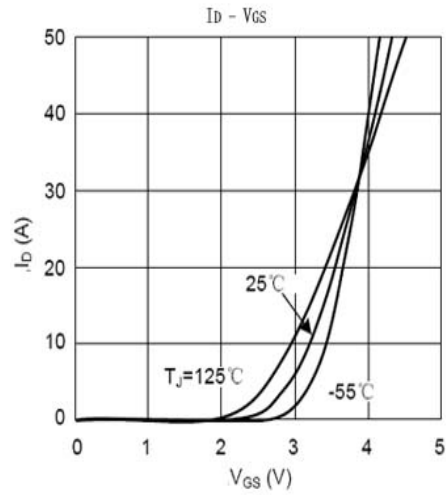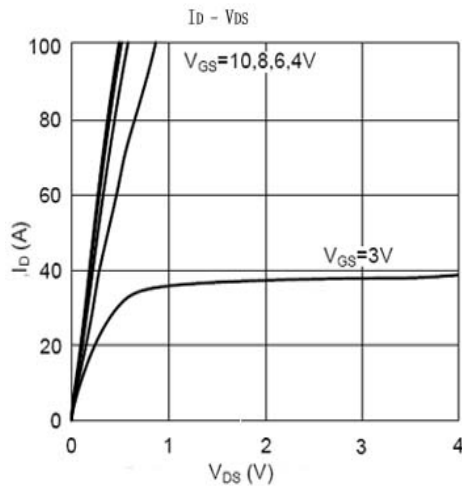

/ Package Dimensions

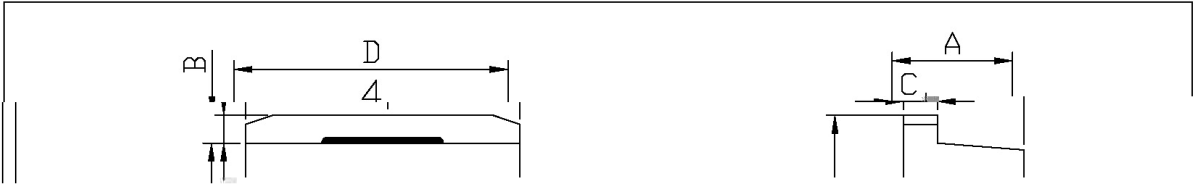


单位: mm

Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.40	0.60	L2	2.24	2.84
C	1.20	1.40	L3	1.20	1.60
D	9.80	10.20			

TN-263

/ Marking Instructions

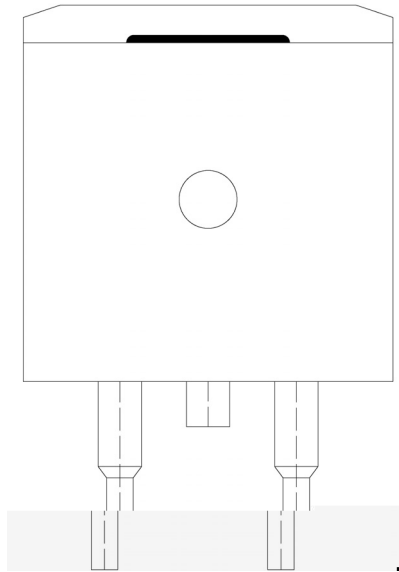

() / Temperature Profile for Dip Soldering(Pb-Free)

