

[illegible]


BRBC817Q

/ Absolute Maximum Ratings(Ta=25)


			℃
		~	℃

/ Electrical Characteristics(Ta=25)

		μ				




/ Electrical Characteristic Curve

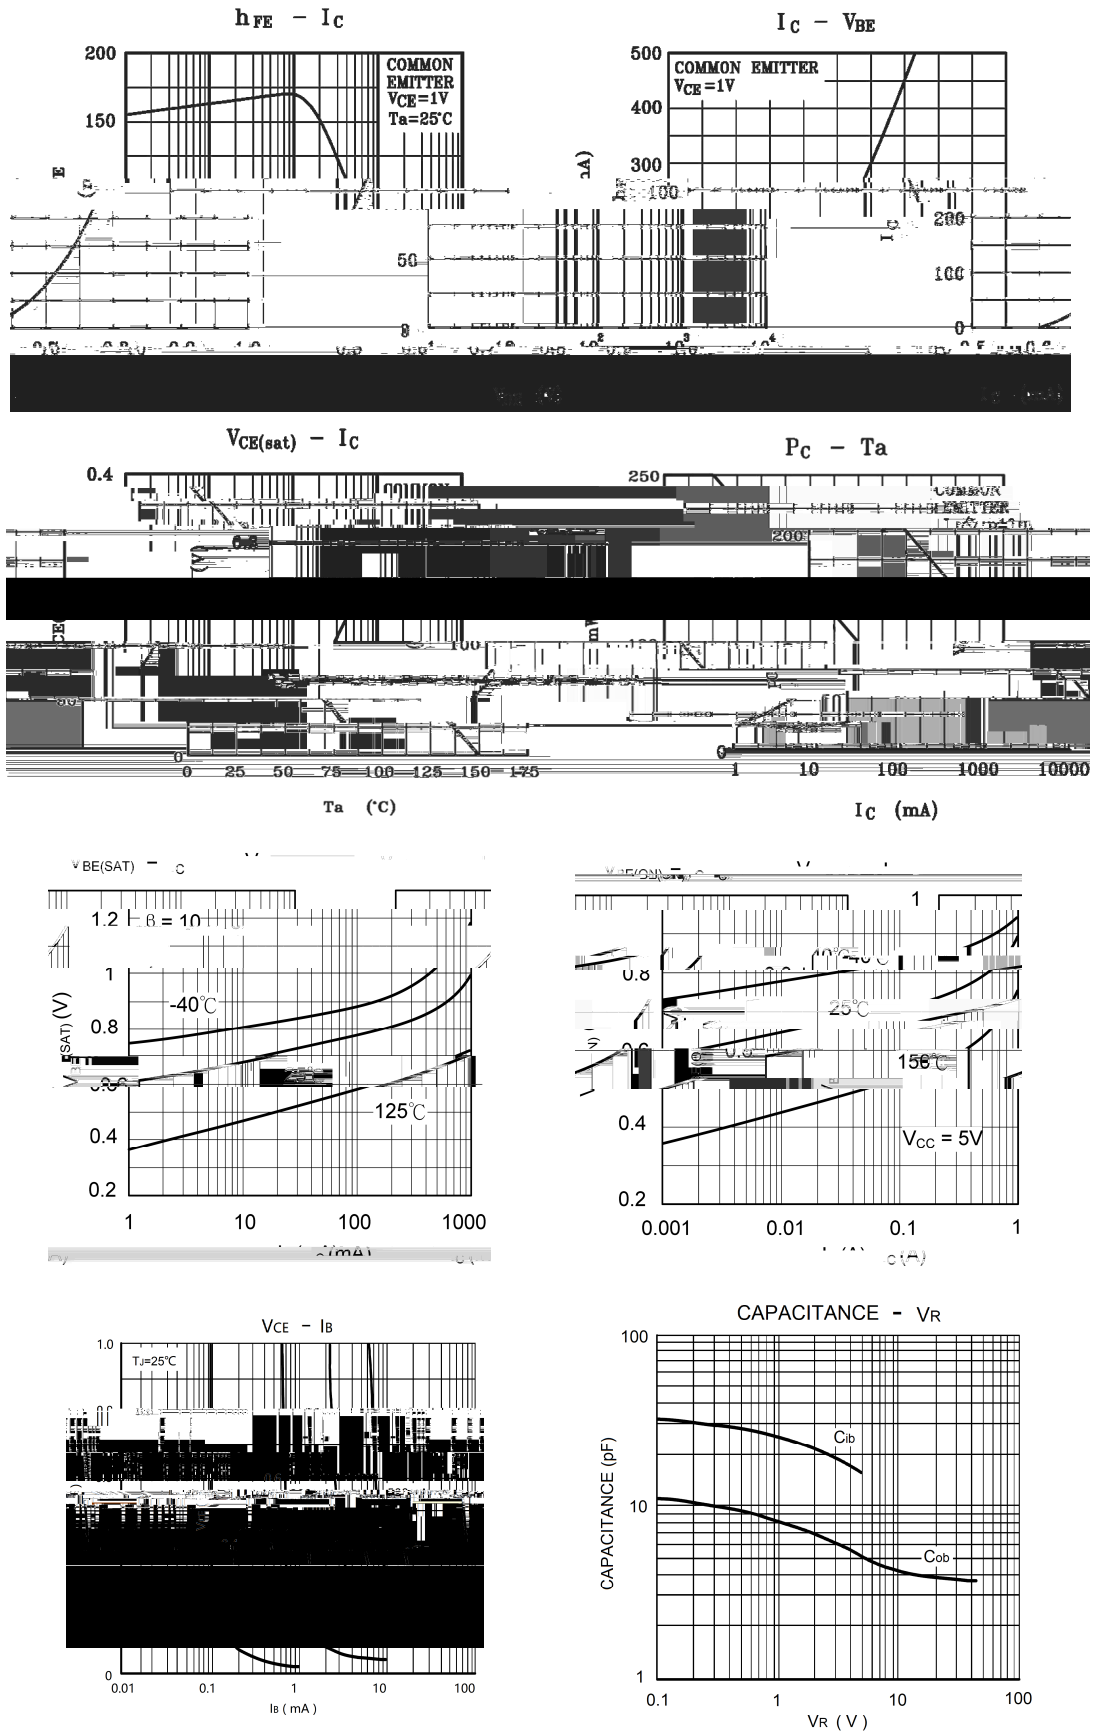


SNT-23


单位: 33

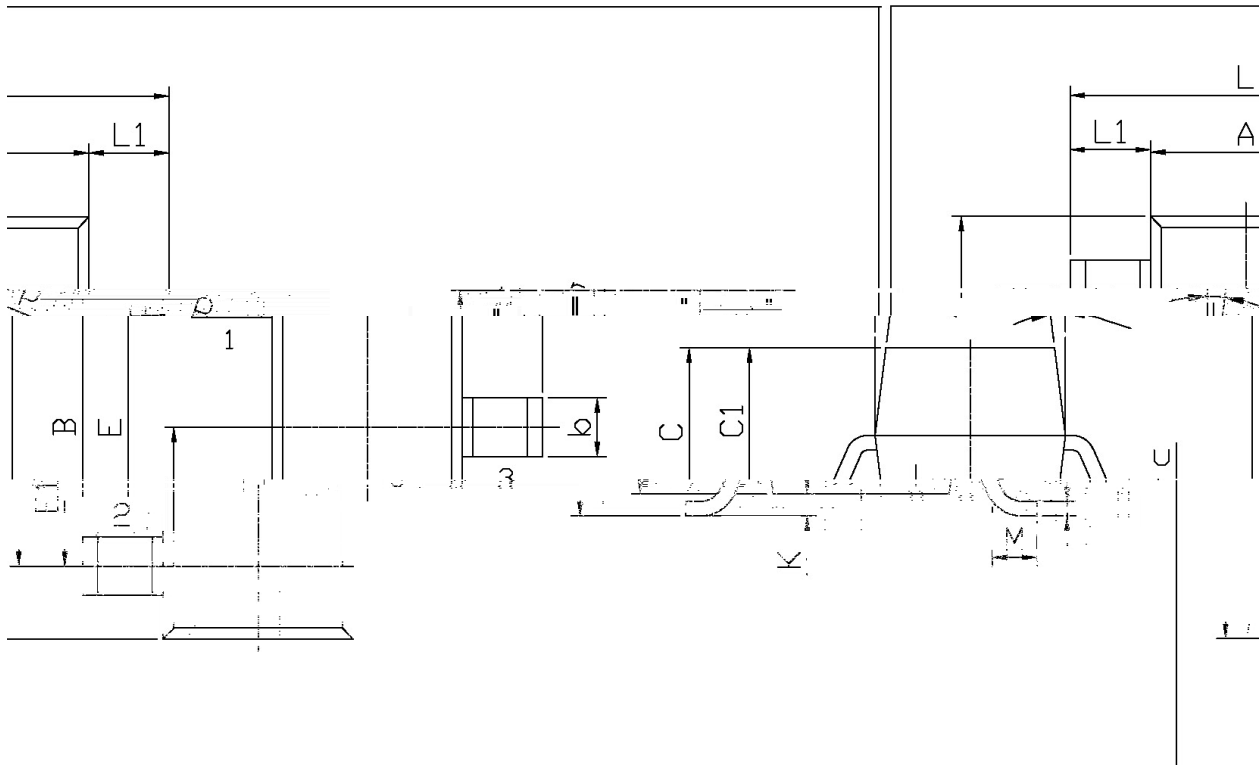

/ Marking Instructions

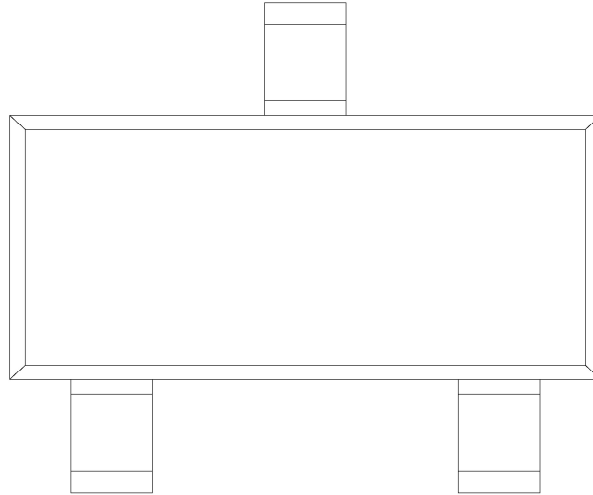

Q
6A

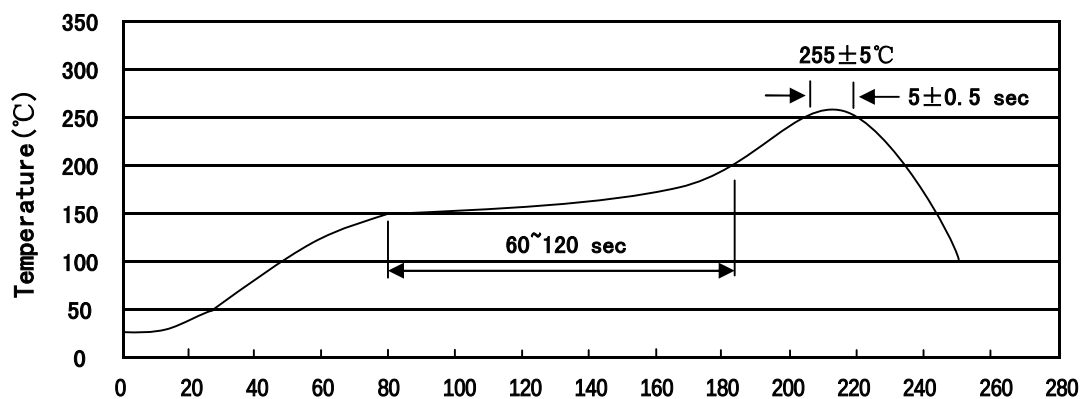
$$\begin{array}{ccccccc} & & & & ^\circ\text{C} & & \\ \pm & & & \pm & \pm & ^\circ\text{C} & \pm \\ & ^\circ\text{C} & & & & ^\circ\text{C} & \\ & & & & & & \end{array}$$
/ **Resistance to Soldering Heat Test Conditions**
$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" × 8	180×120×180	390×385×205

/ Notices