
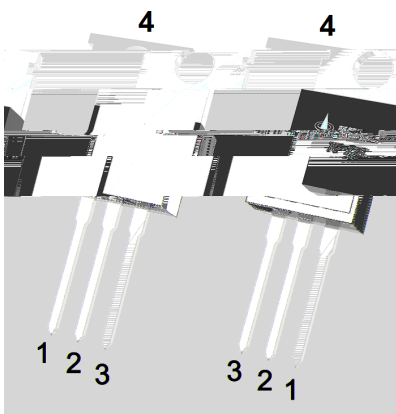


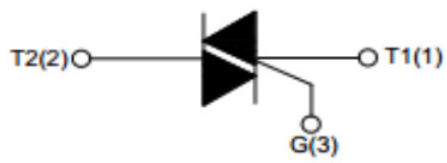

ΩΞΑ

J

			μ
μ			

ΩΞΑ
μΩβ

Jα

	Ω			
	Ω			
	Ω			
				μ
	μ			
				μ

三极管

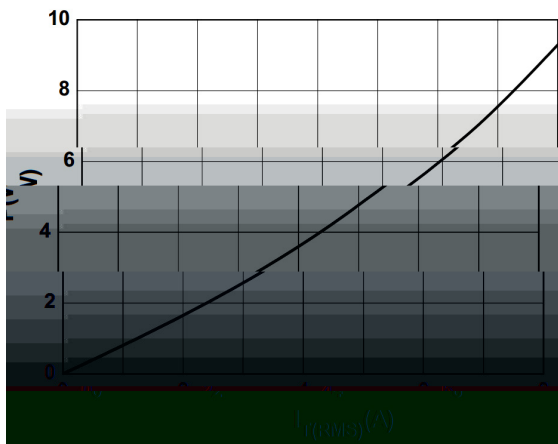


FIG.1: Maximum power dissipation versus RMS on-state current

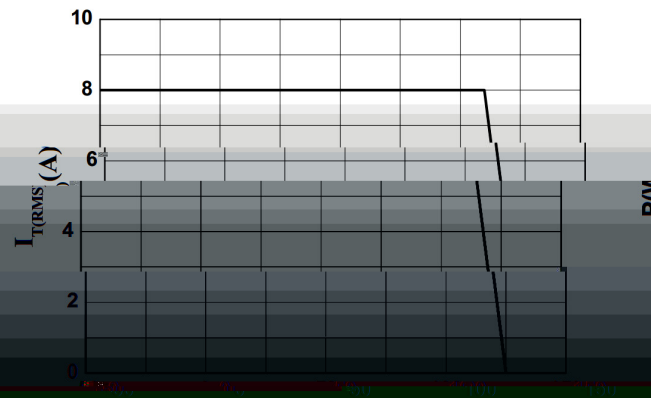


FIG.2: RMS on-state current versus case temperature

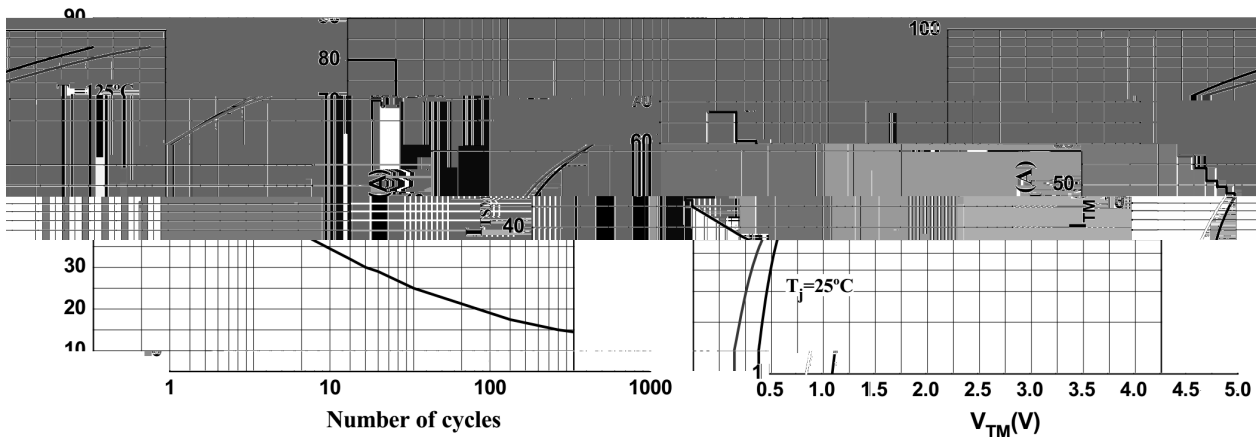


FIG.3: Surge peak on-state current versus number of cycles

FIG.4: On-state characteristics

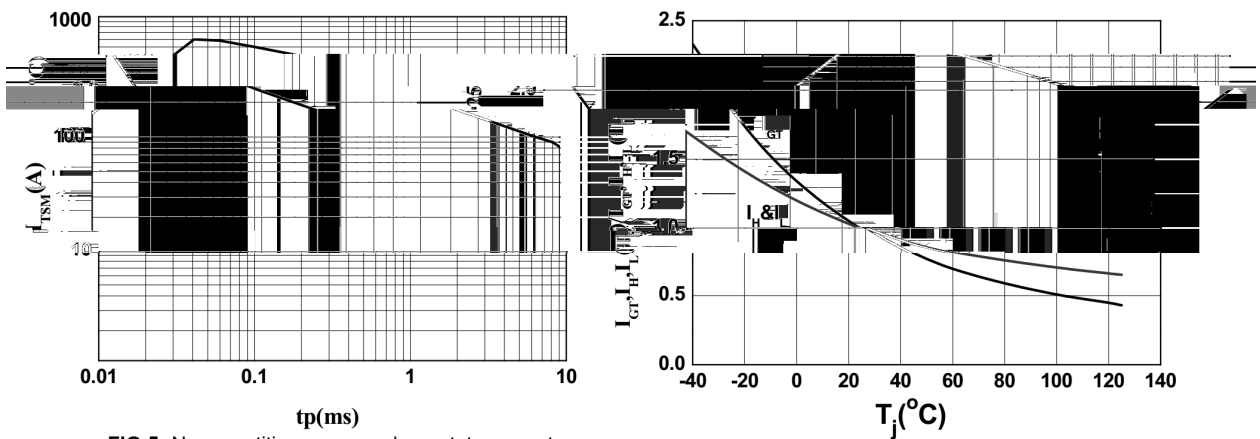



FIG.5: Non-repetitive surge on-state current
for switching pulses with width tp=200µs, and
corresponding values of I_G (at t=100µs)

FIG.6: Heating current and switching
current, heating current and switching
current versus junction temperatures

单位: mm

T0-220

单位: mm

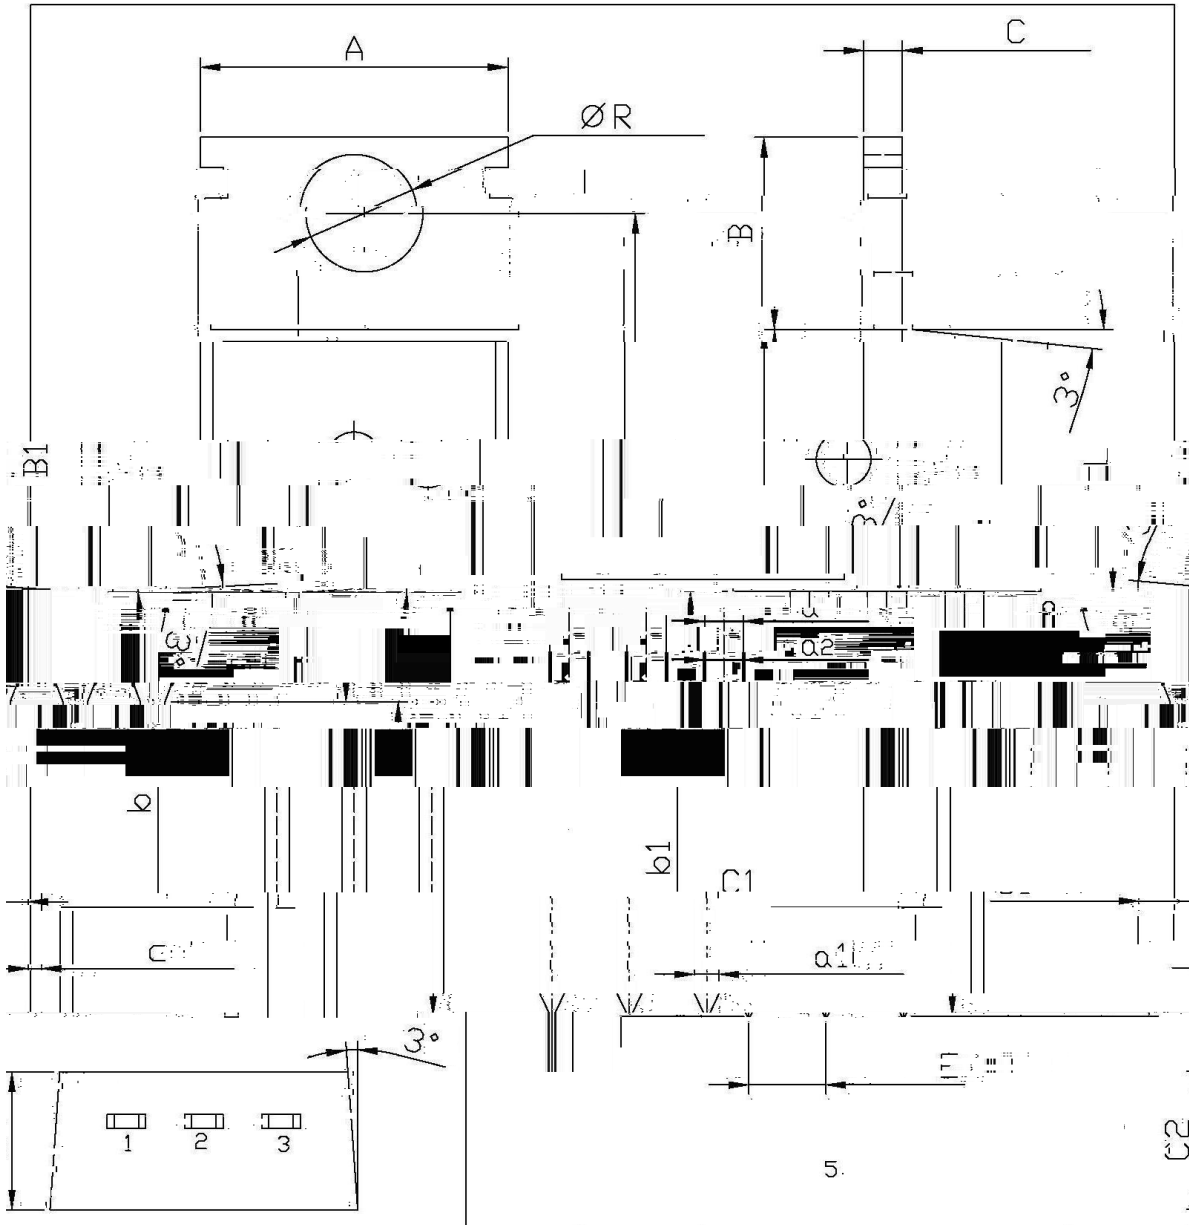

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
L	15.7	16.1	B1	9.0	9.4
b	12.6	13.6	C1	2.2	2.6

图 2

