

/ Descriptions


VRW0;<

/ Features


2

/ Applications

/ Equivalent Circuit

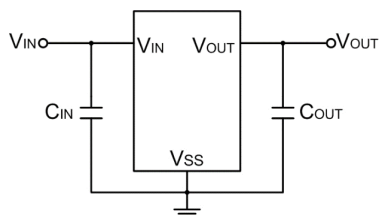

/ Pinning

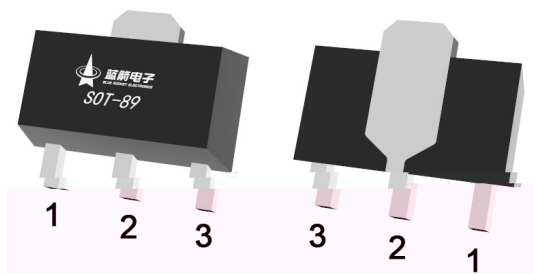

/ Marking

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(TA=25 , VIN=VOUT+1V, CIN=COUT=1uF, unless otherwise specified)

	△	() ≤ ≤				
	△ △	() ≤ ≤				
	△ △	℃ ≤ ≤ ℃				℃
		,				
		,				
		,				
		,				




/ Electrical Characteristics($T_A=25$, $V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, unless otherwise specified)

						℃
	△					℃

/ Typical Application Circuit

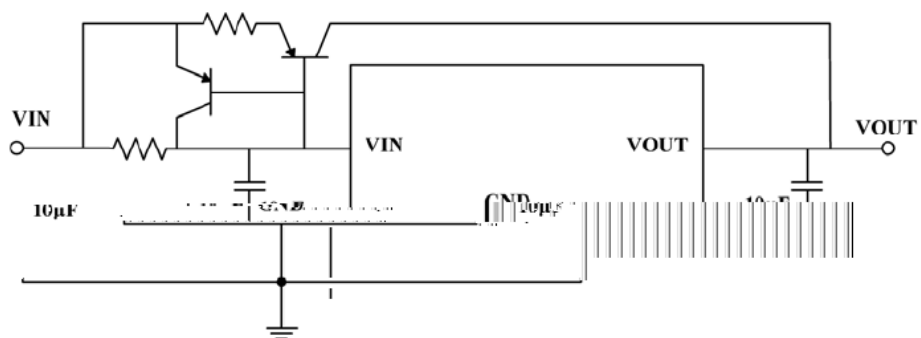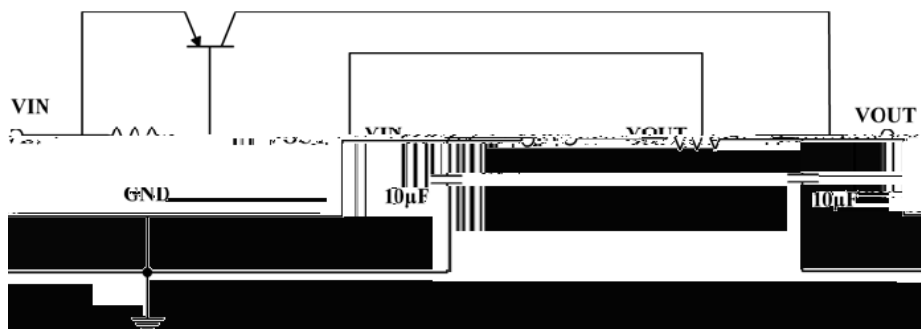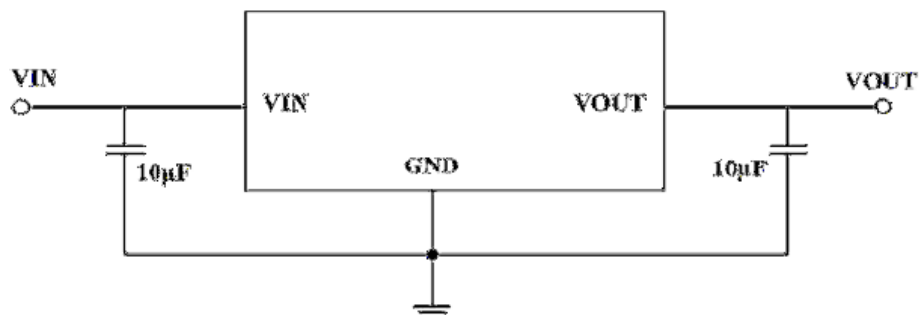


/ Typical Application Circuit

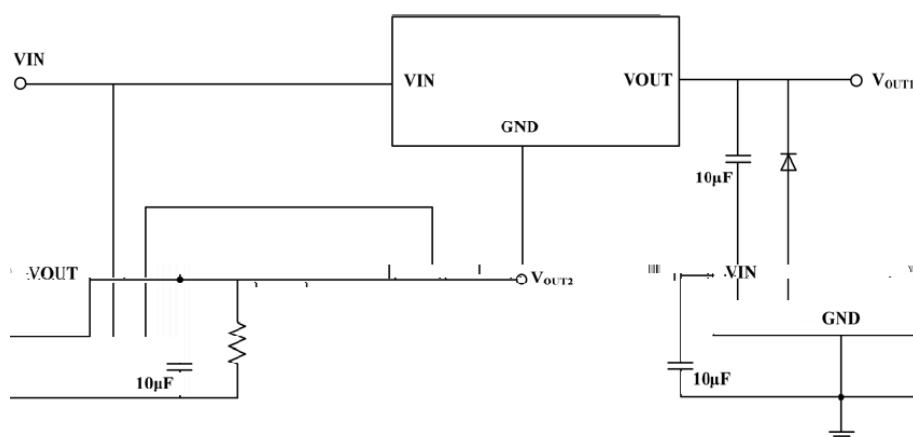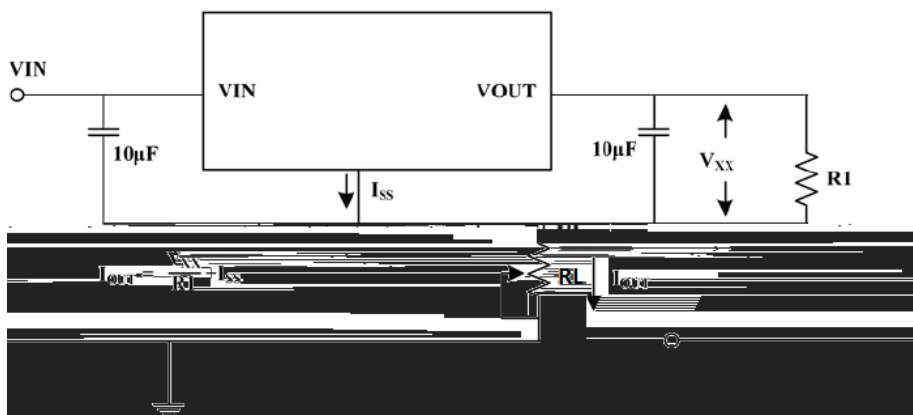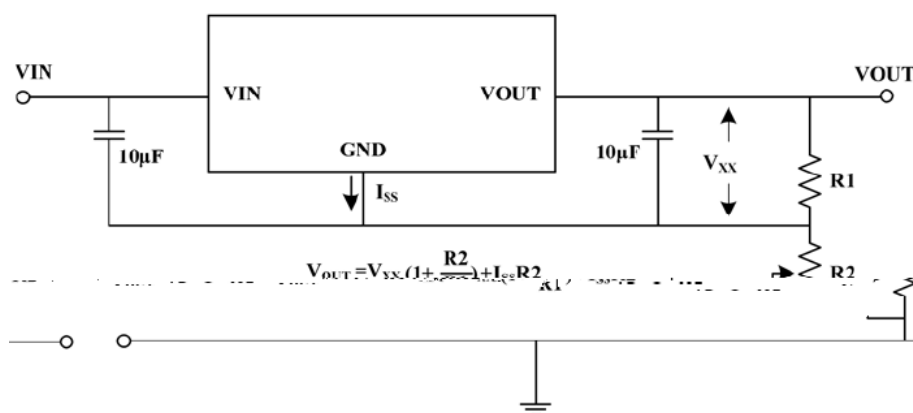


BRCO7350HT

/ Marking Instructions

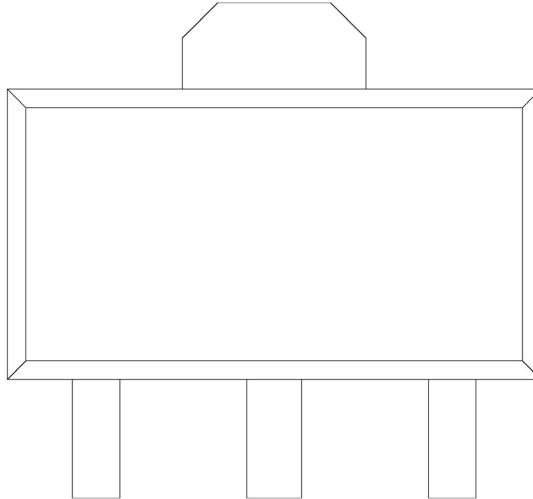

:

() /

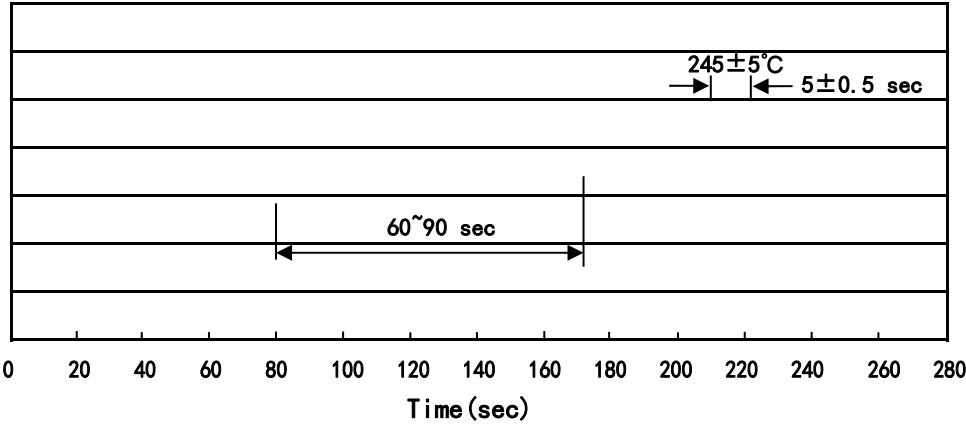

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices