

/ Descriptions


VOW0;<

/ Features


±

/ Applications

/ Equivalent Circuit

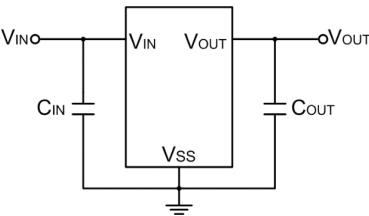

/ Pinning

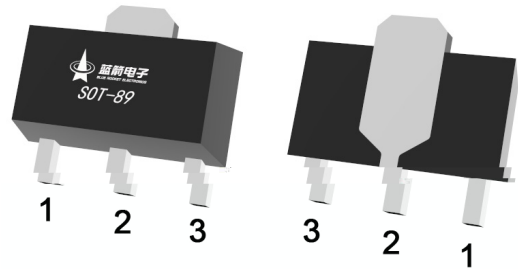

/ Marking






/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(TA=25 , VIN=VOUT+2V, CIN=COUT=1uF, unless otherwise specified)




		≤ ≤				
		≤ ≤				
		≤ ≤				






/ Electrical Characteristic Curve

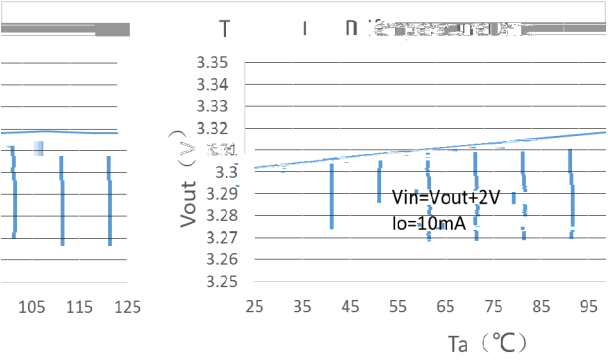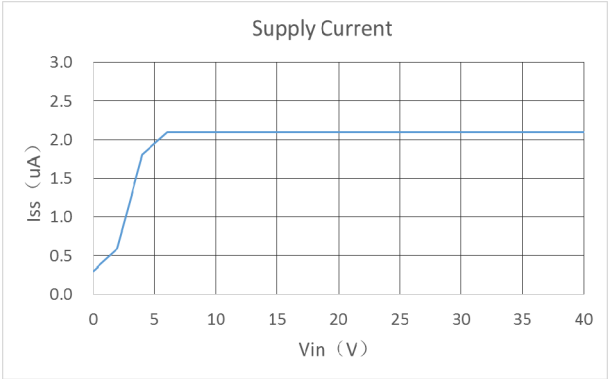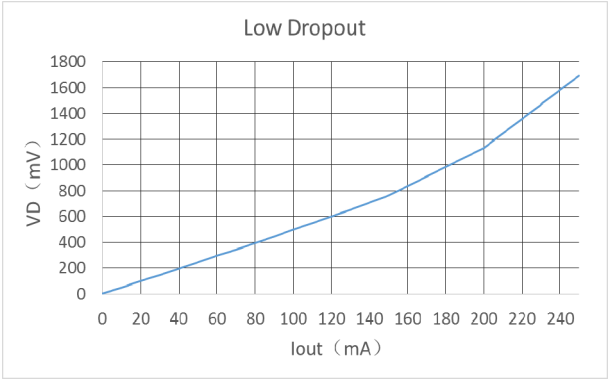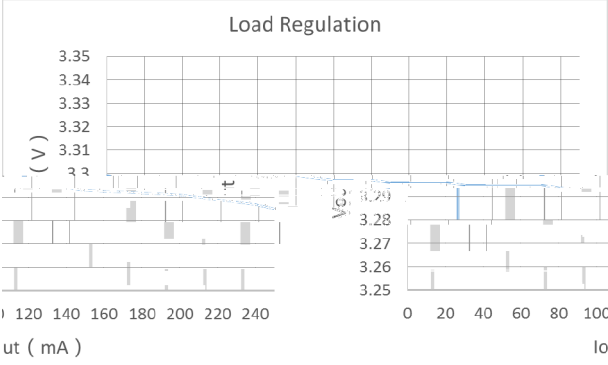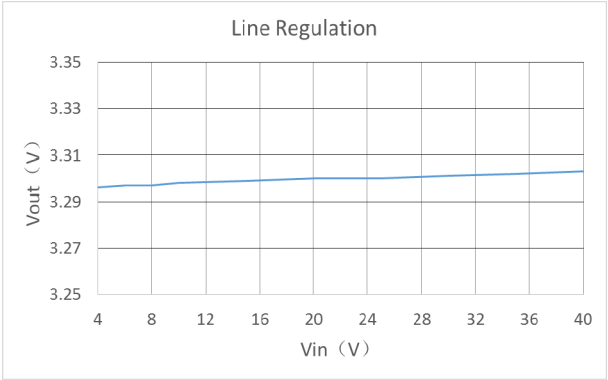


/ Typical Application Circuit

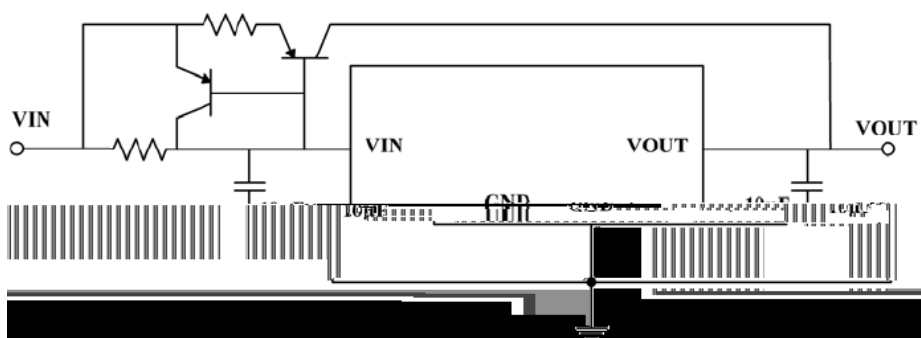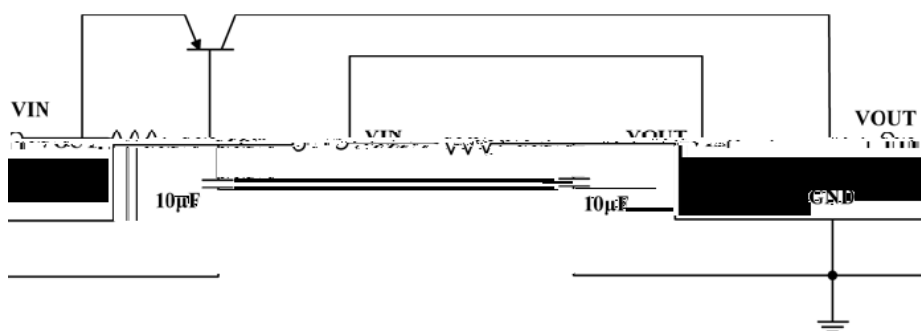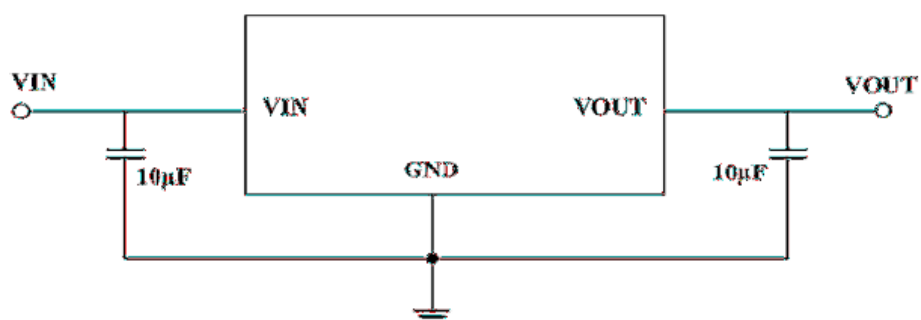

/ Typical Application Circuit

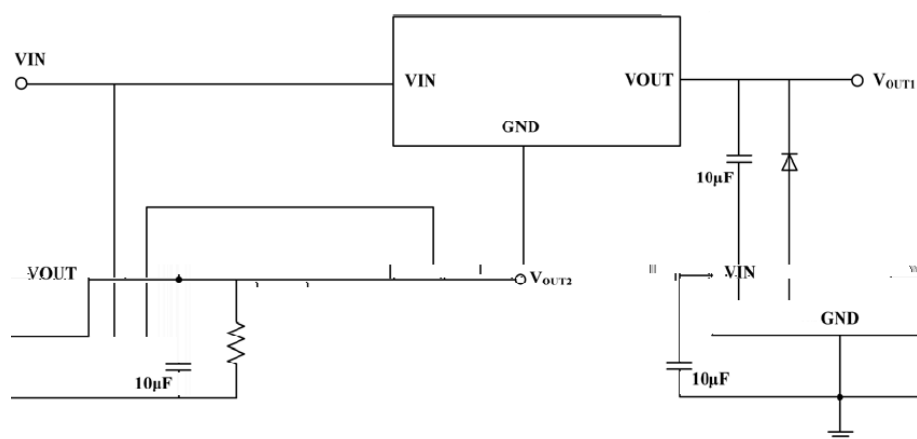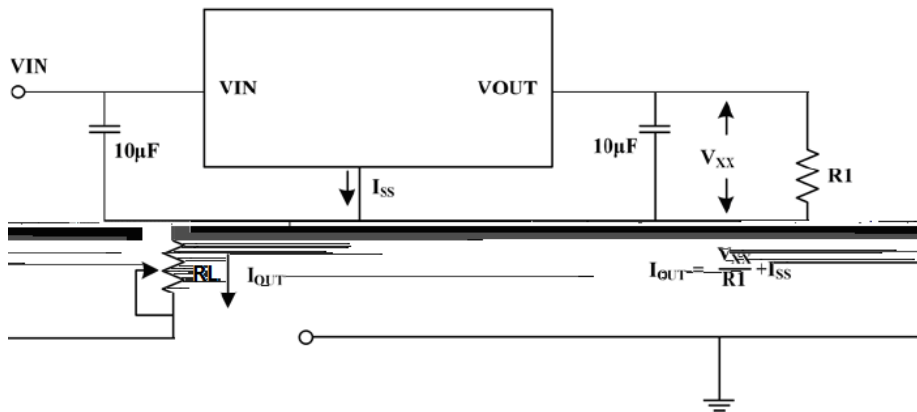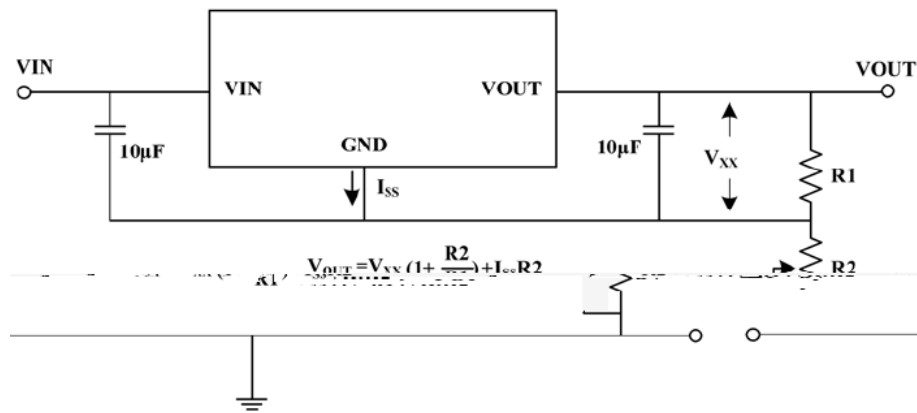


/ Marking Instructions

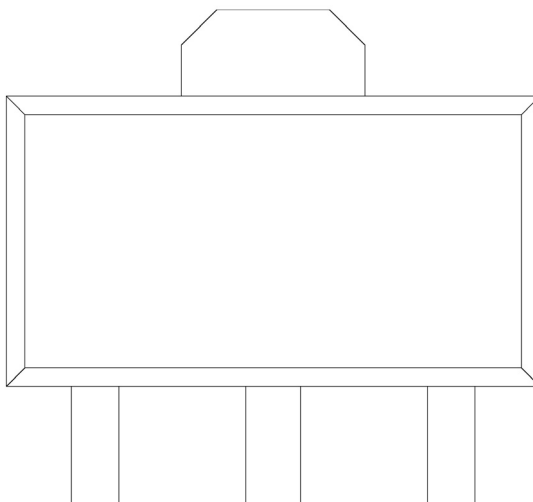

:

() /

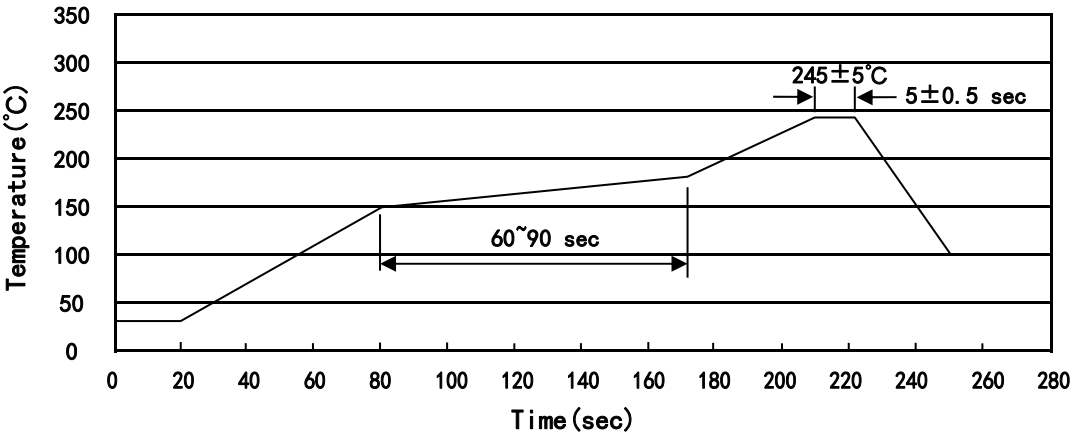

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices