/ Descriptions

SOT-89

/ Features

30V 2.5μA ±2%

AEC-Q100

μ ±

/ Applications

/ Equivalent Circuit

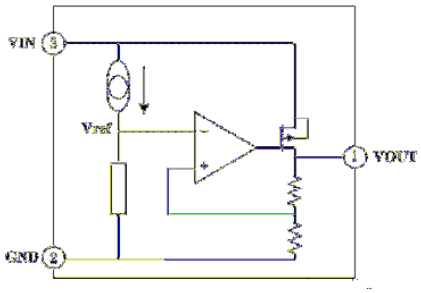

/ Pinning

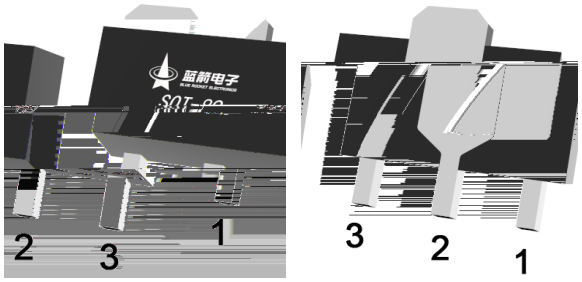

/ Marking

/

/ Absolute Maximum Ratings(Ta=25)

	θ		

/ Electrical Characteristics(Ta=25)

						μ

/ Electrical Characteristic Curve

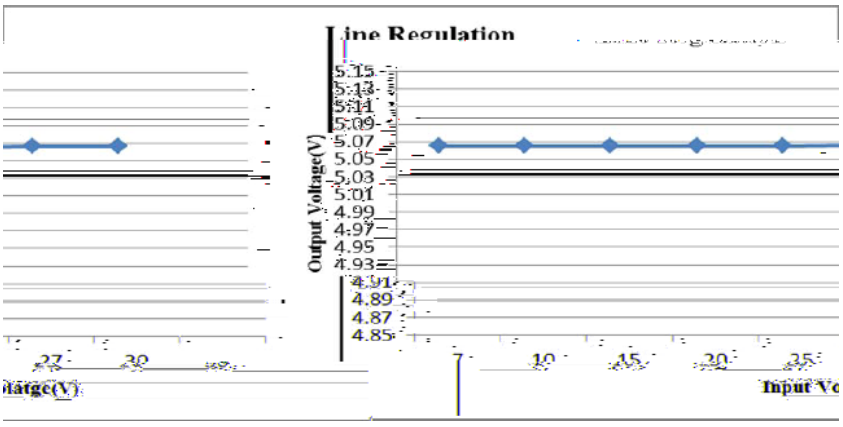

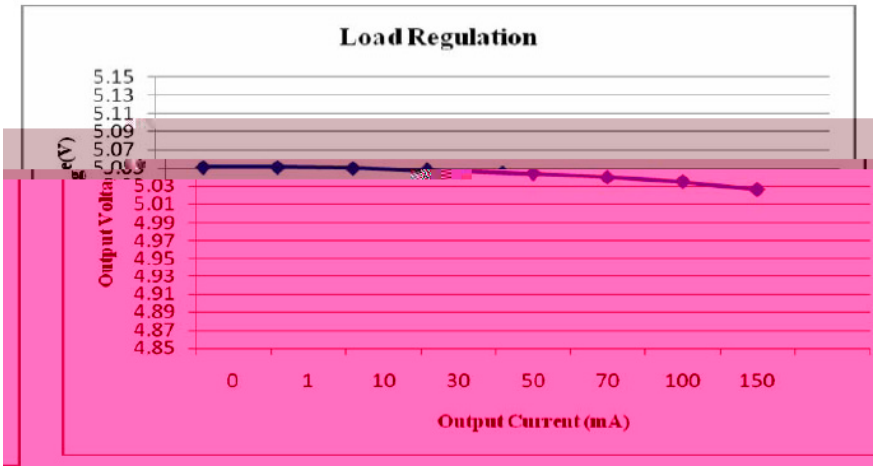

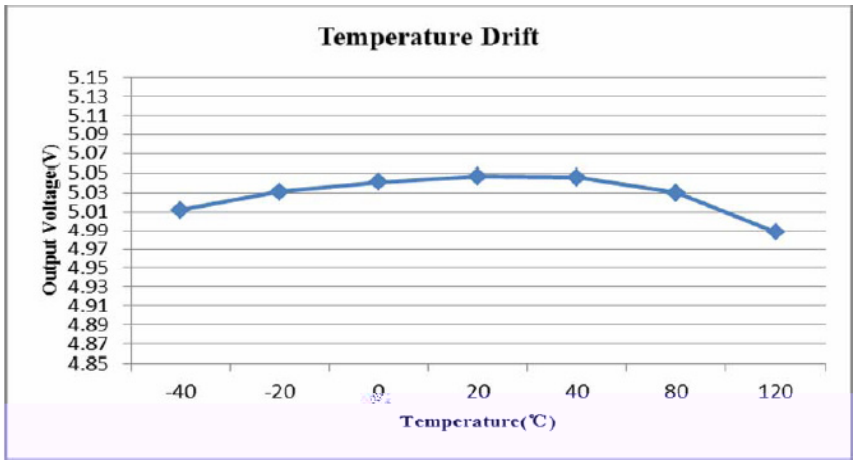

/ Typical Application Circuit

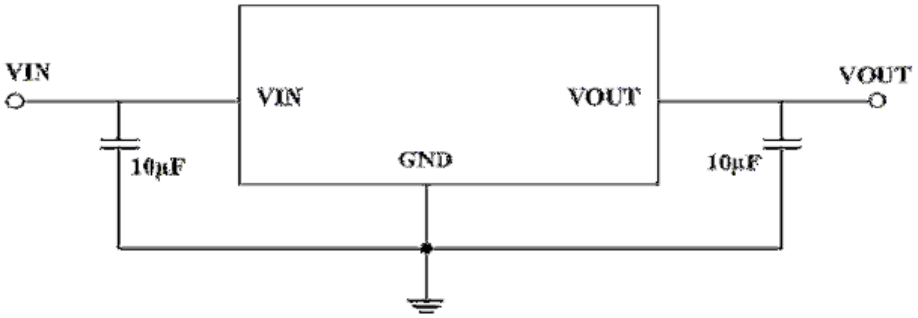

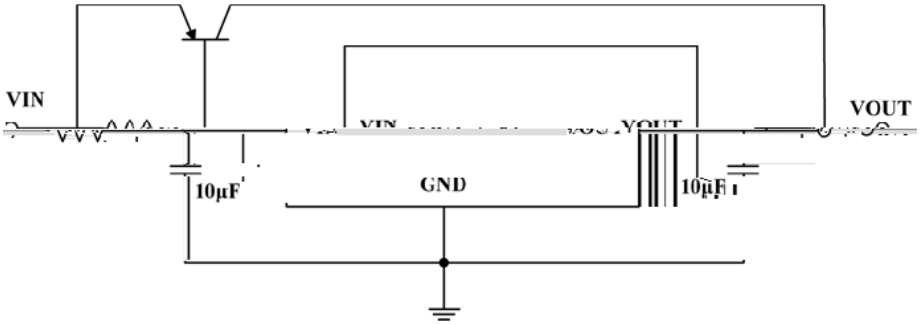

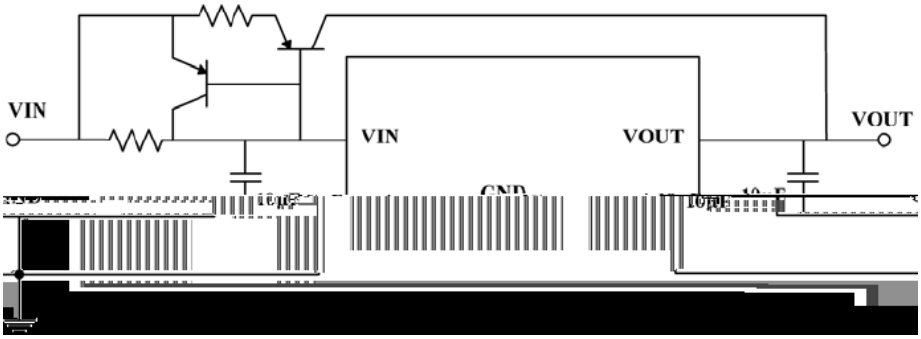

/ Typical Application Circuit

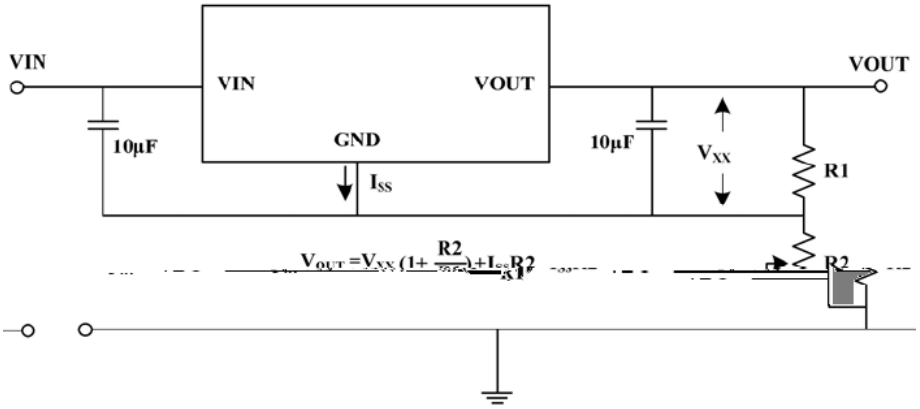

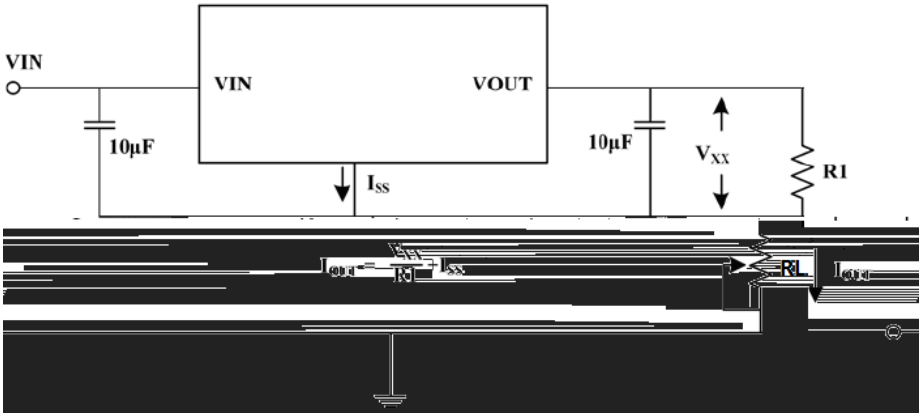

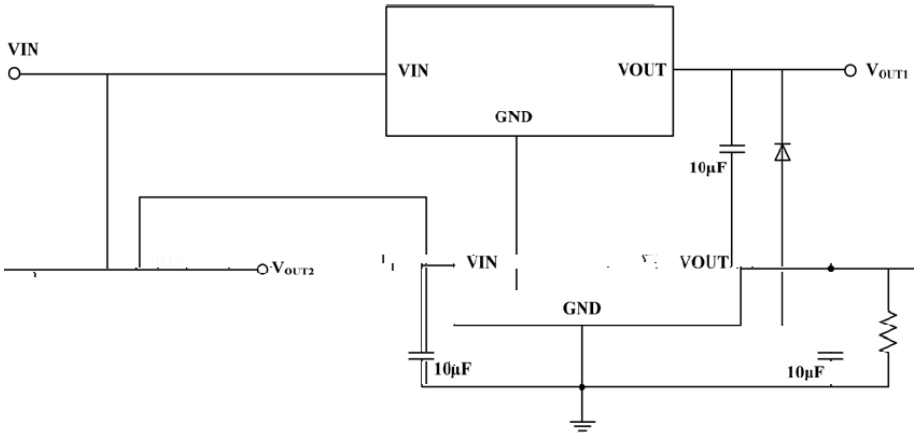

/ Package Dimensions

SOT-89 单位：mm

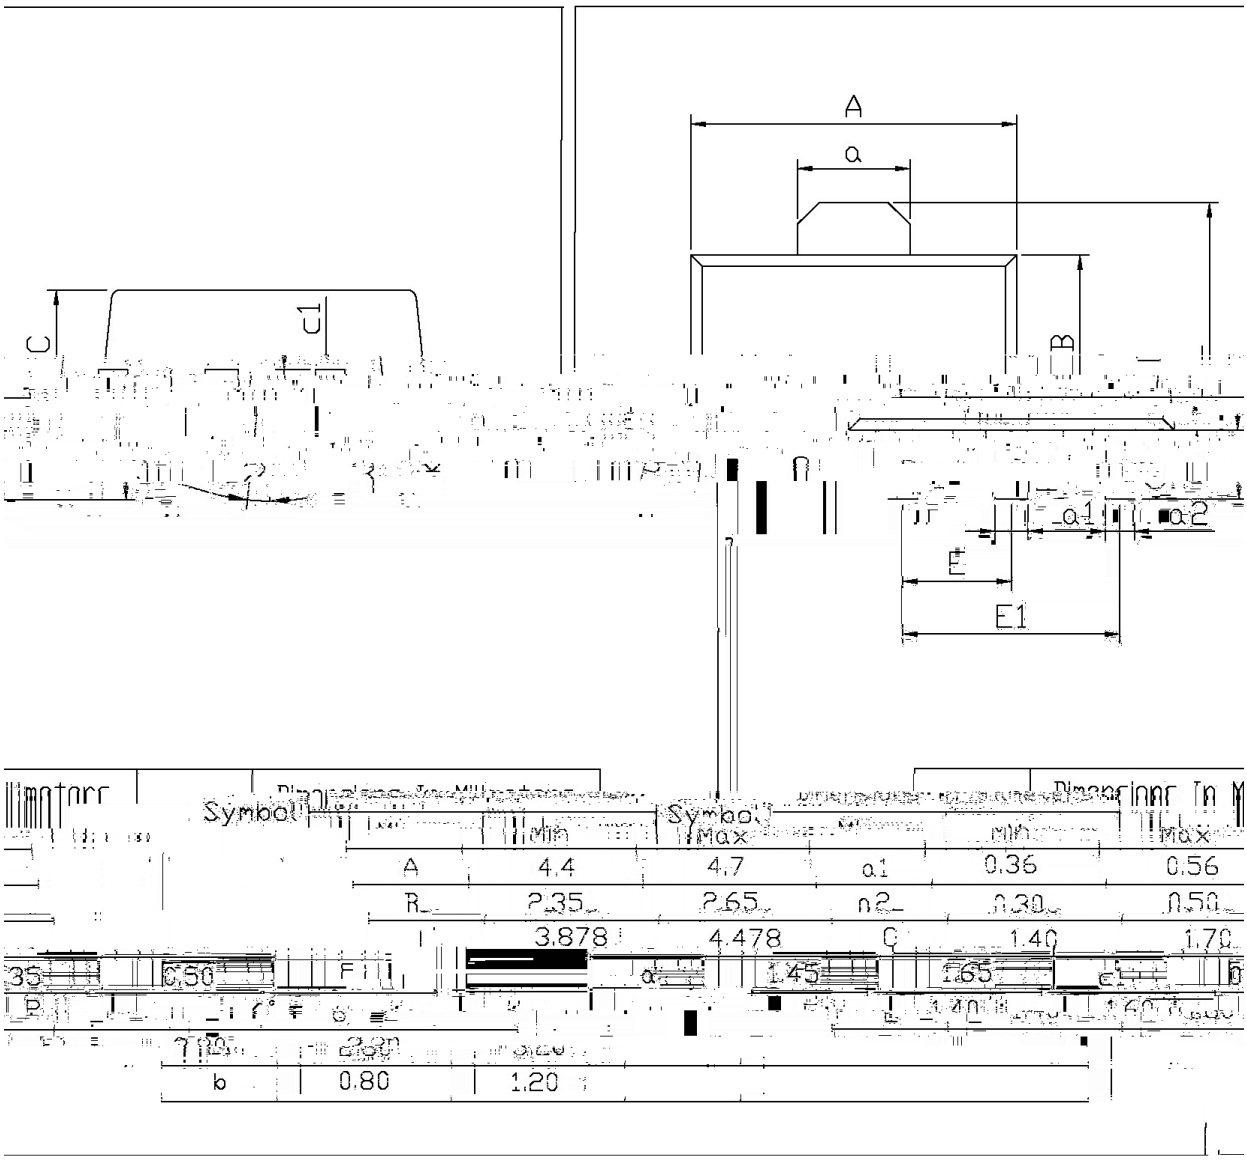

/ Marking Instructions

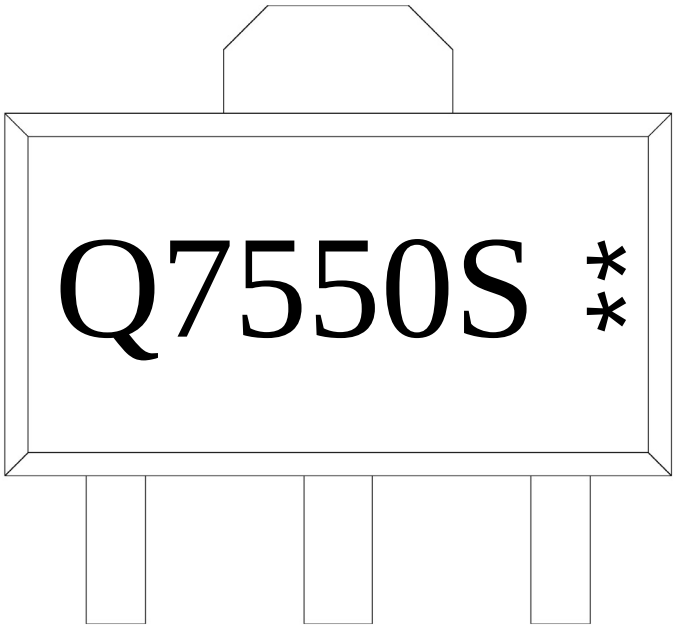

**

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

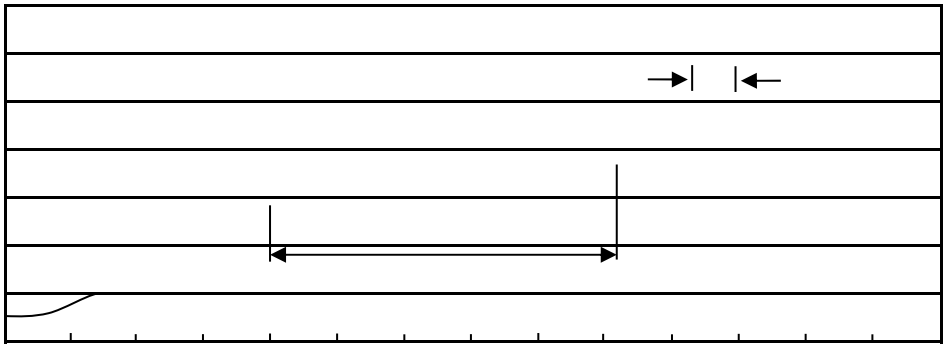

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	1,000	7	7,000	6	42,000			

/ Notices