

BRCS005N04SHSL

/ Absolute Maximum Ratings(Ta=25)




$$\leq \mu \leq$$

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		μ				
						Ω
						Ω
		μ				

BRCS005N04SHSL


/ Electrical Characteristic Curve

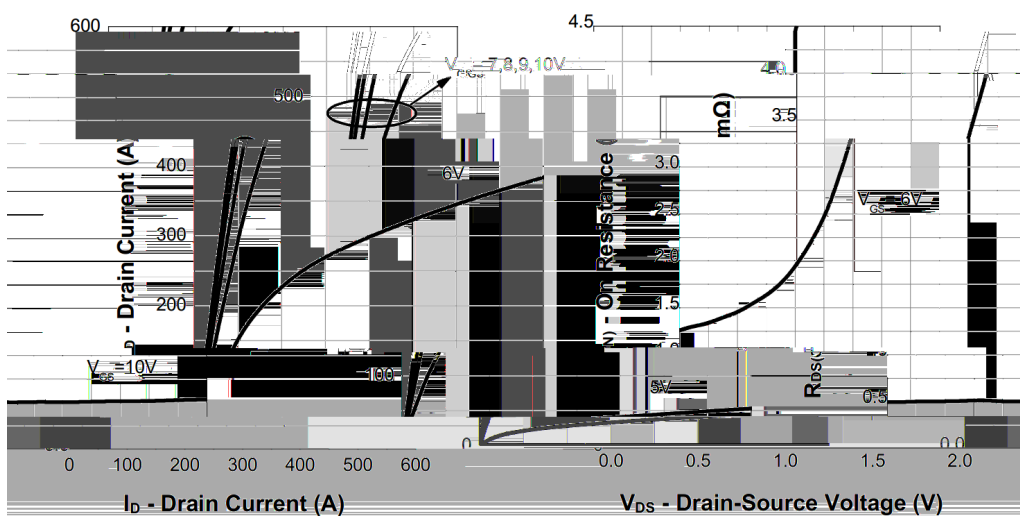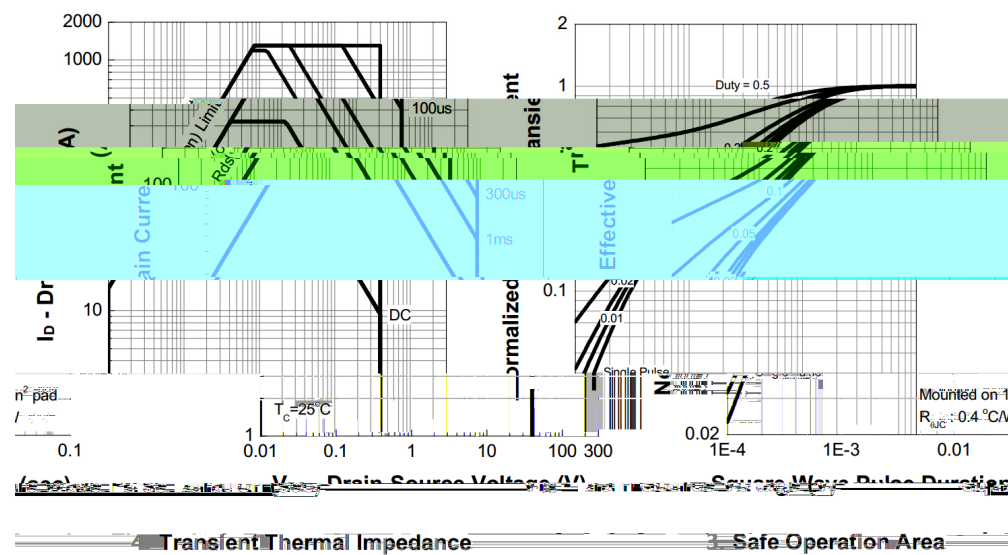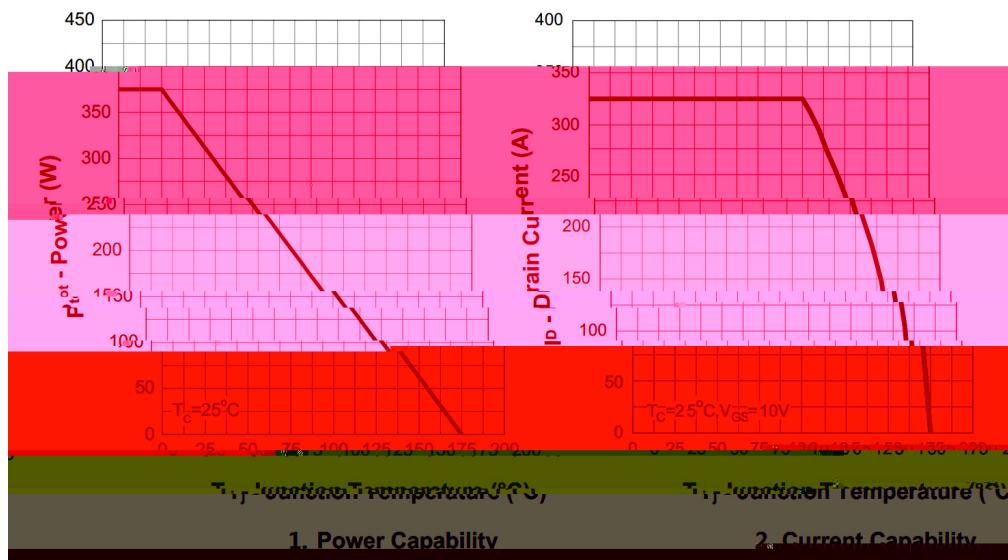



6. On Resistance

5. Output Characteristics

/ Electrical Characteristic Curve

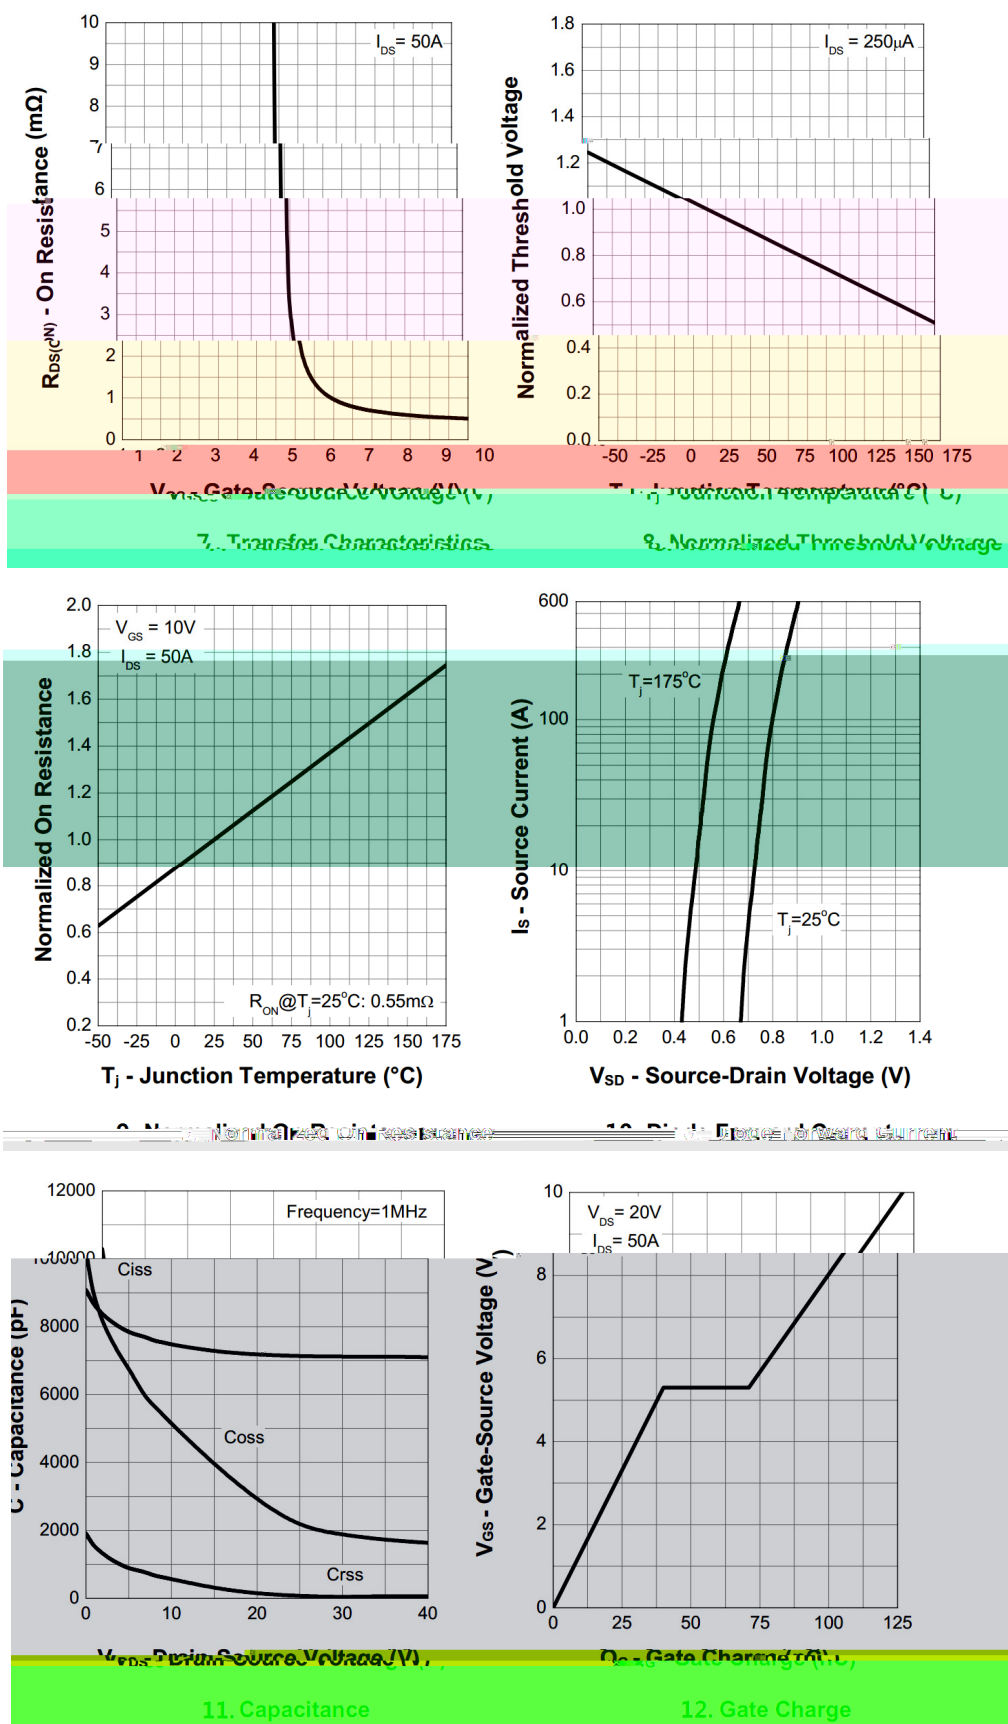


/ Package Dimensions

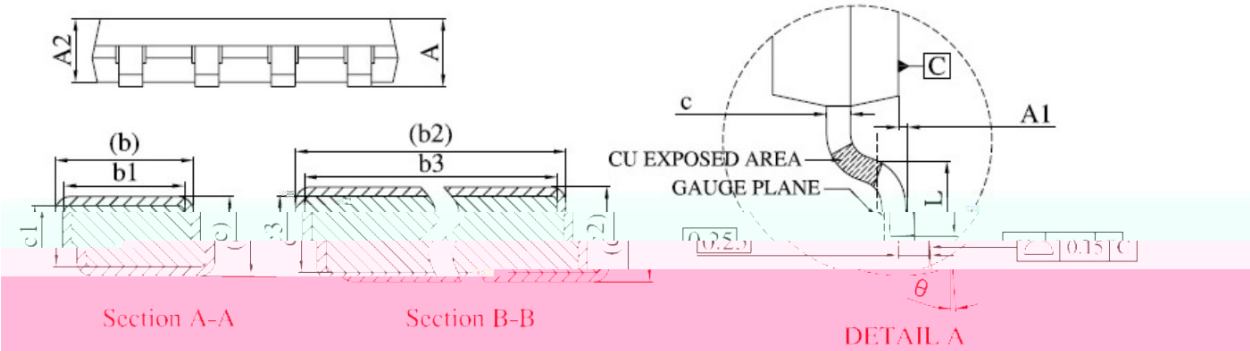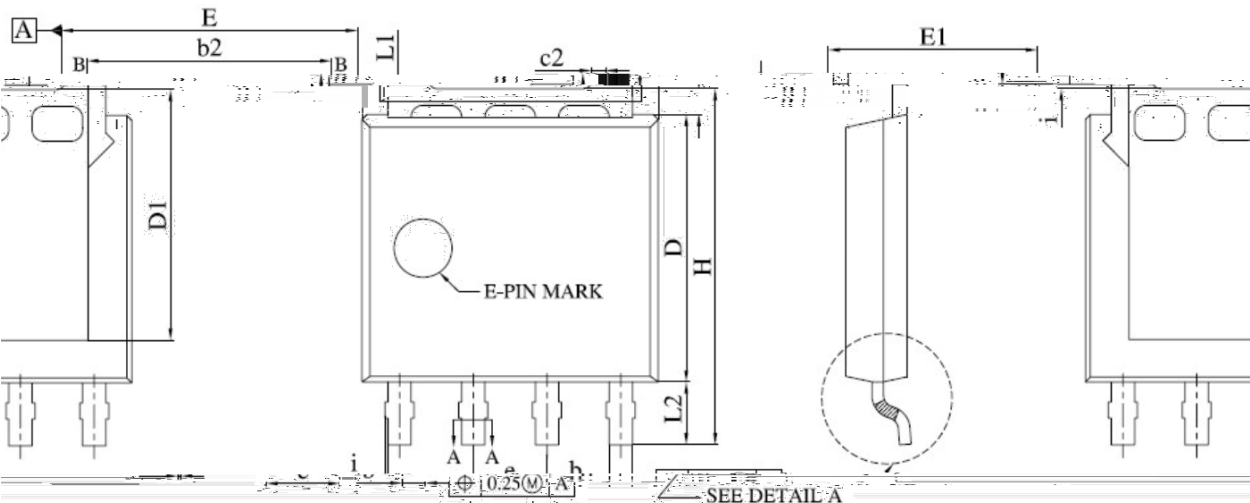


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	MIN.	MAX.		MIN.	MAX.
A	1.00	1.30	E	4.95	5.30
A1	0.00	0.15	E1	3.50	3.70
A2	0.98	1.12	e	1.27 BSC.	
b	0.35	0.50	H	5.95	6.35
b1	0.32	0.46	i	-	0.10
b2	4.02	4.11	L	0.40	0.50
b3	4.00	4.37	L1	0.22	0.30
c	0.19	0.23	L2	0.30	0.40
c1	0.17	0.23	theta	0°	8°
c2	0.24	0.30			
(b)	0.22	0.28			
(c)	4.25	4.70			
(D)	-	4.45			

/ Marking Instructions

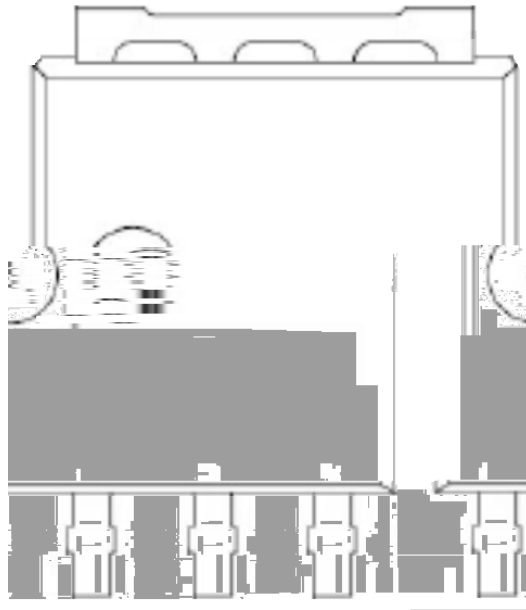

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

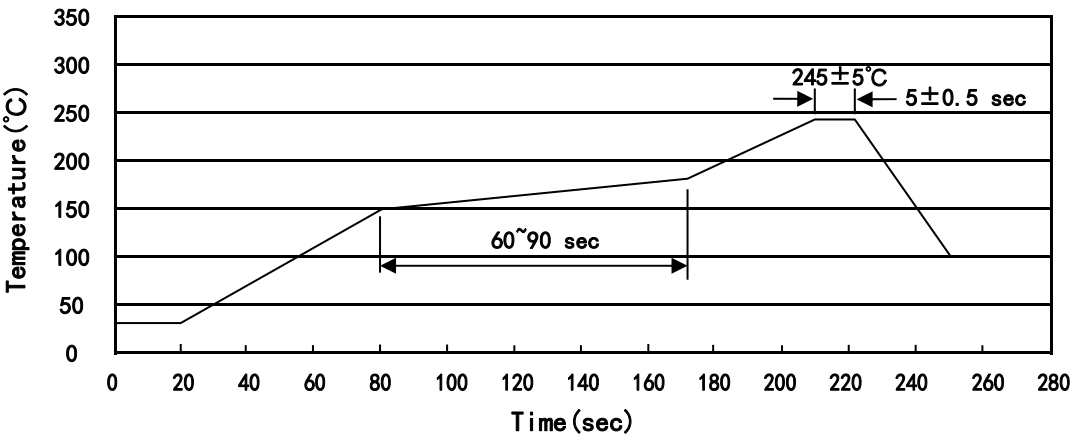

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	包装数量					包装尺寸 :		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	包装数量					包装尺寸 :		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices