

/ Descriptions


PDFN3×3A-8L N MOS ×

/ Features


□
U₀
U₀
AEC-Q101 Â

/ Applications

/ Equivalent Circuit



/ Pinning

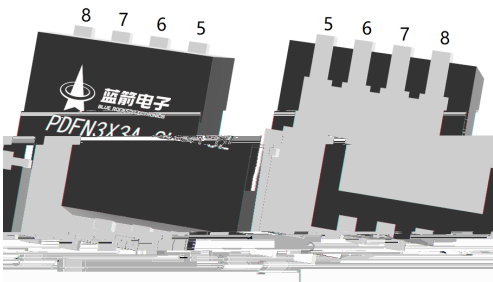

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

/ Marking




/ Absolute Maximum Ratings(Ta=25)

		N		
		N		
	U	θ		N




/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω
		Ω	Ω			

/ Electrical Characteristic Curve

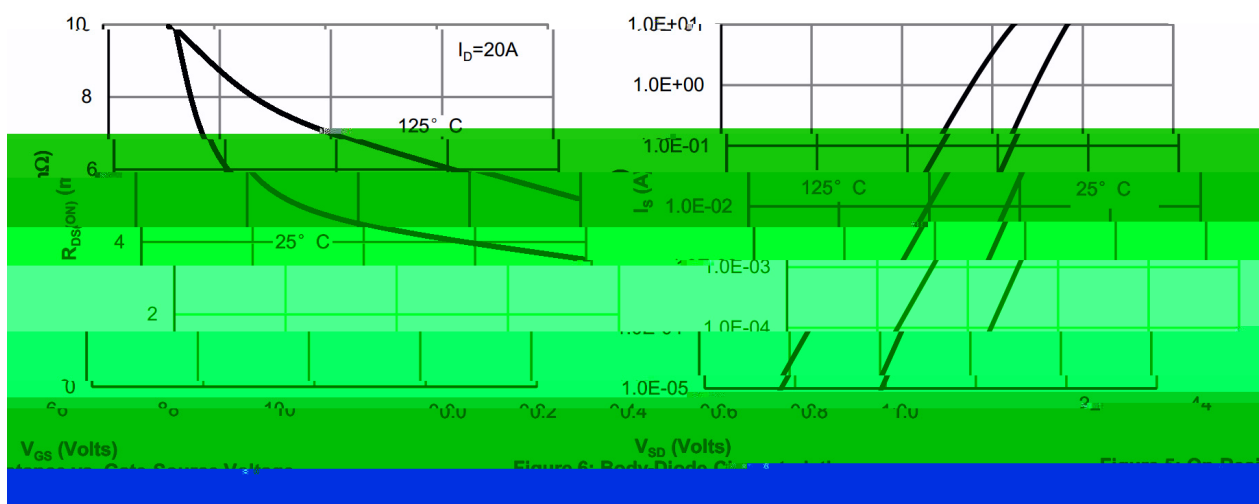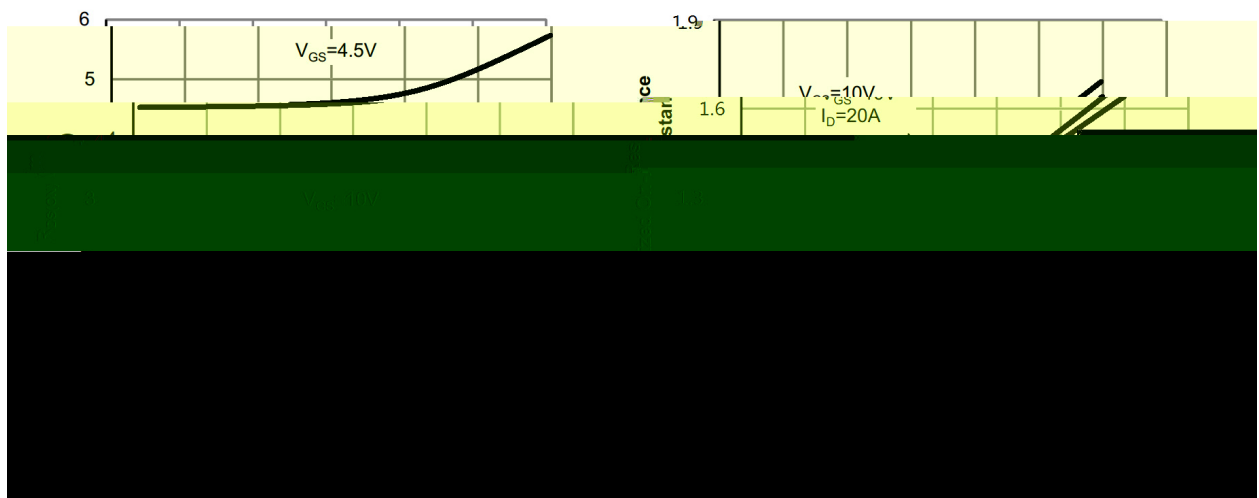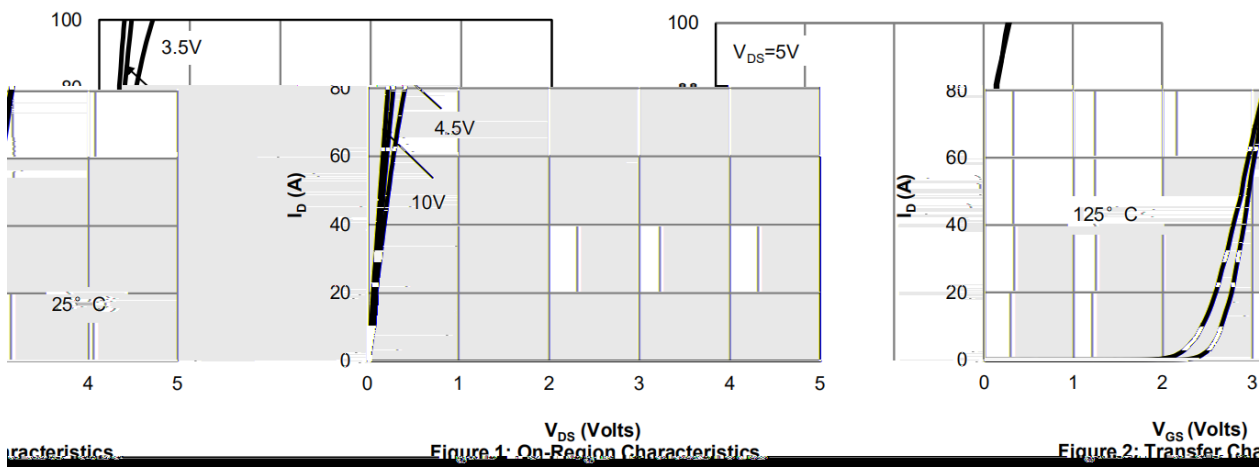


/ Electrical Characteristic Curve

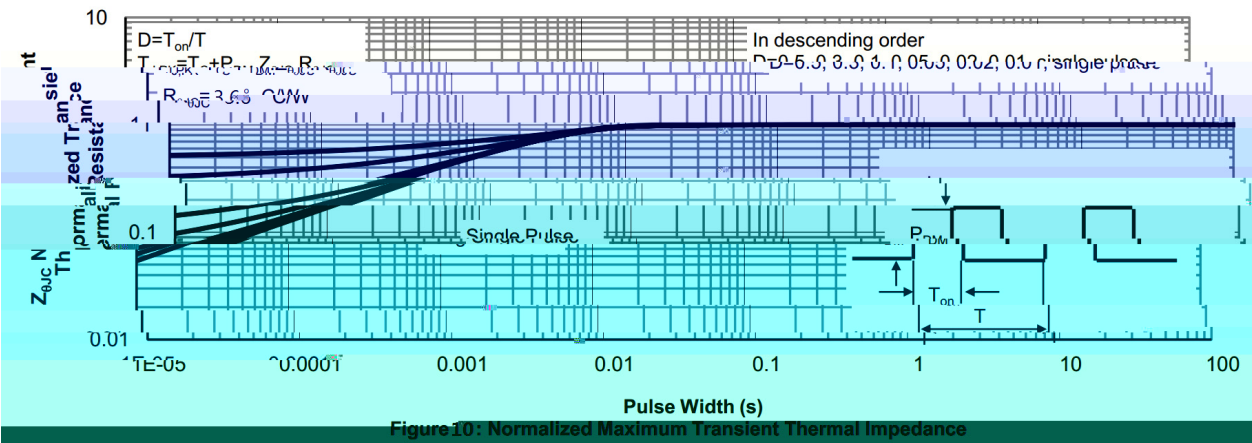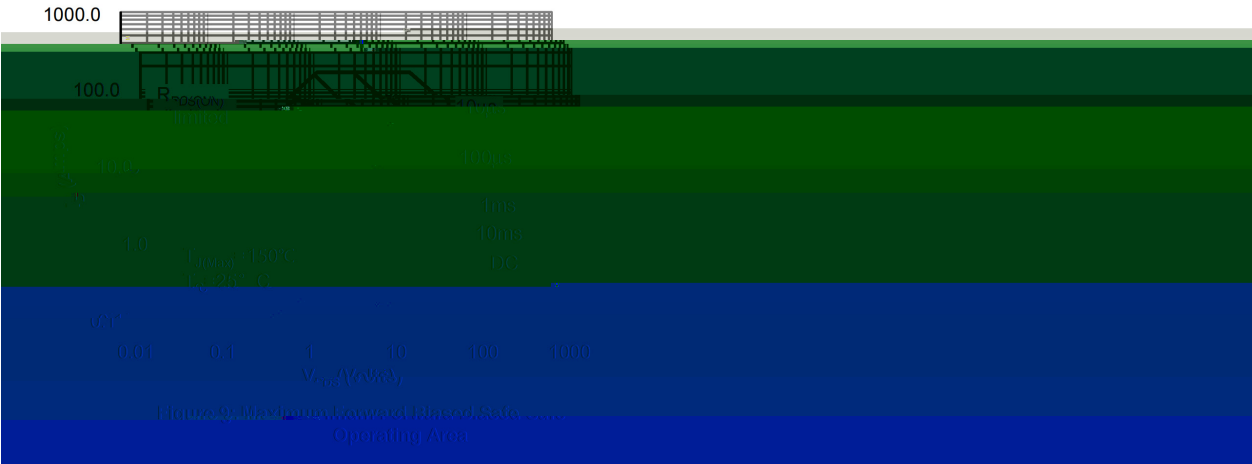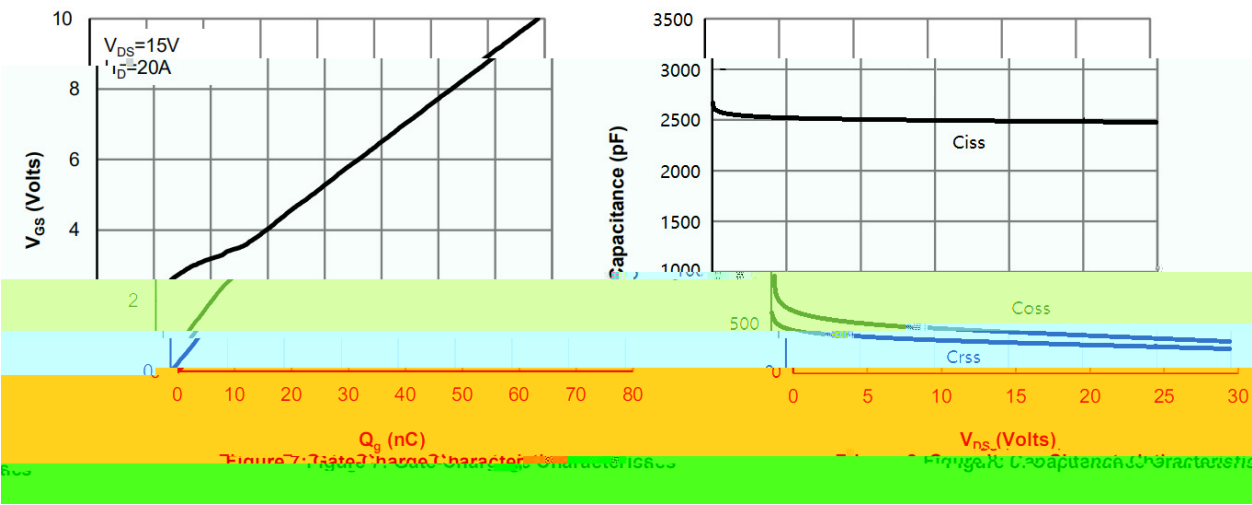

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

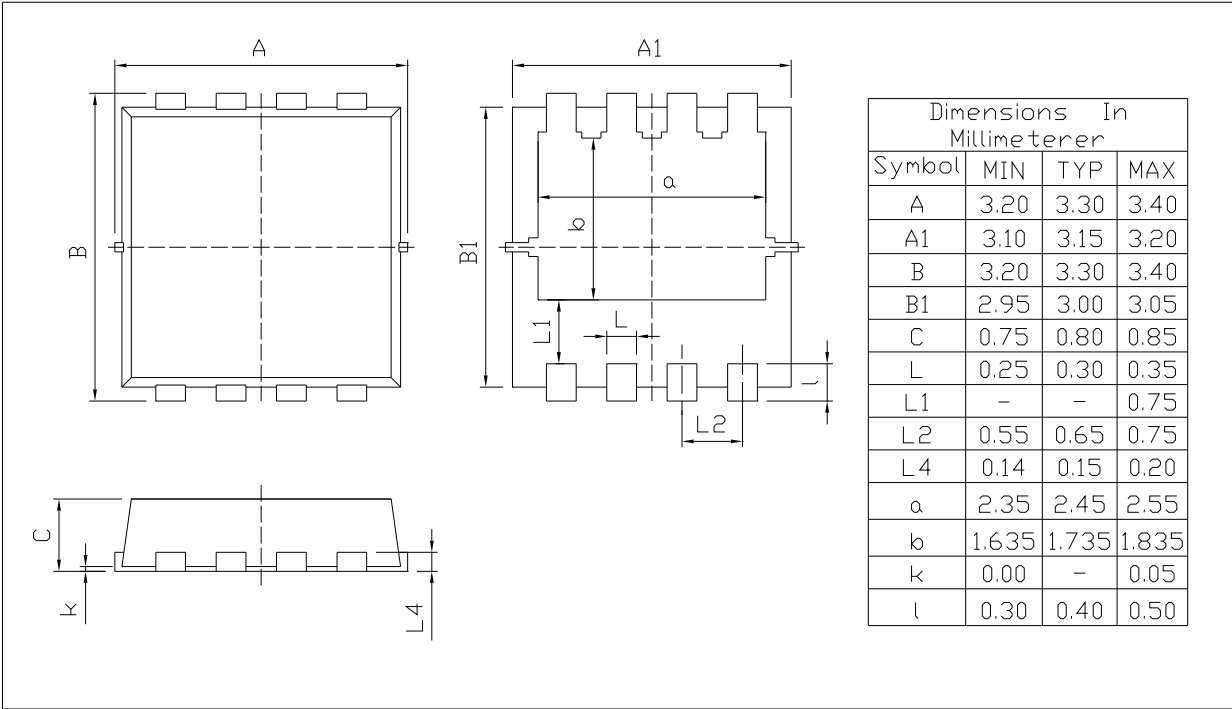


Rev.00 202011

/ Marking Instructions

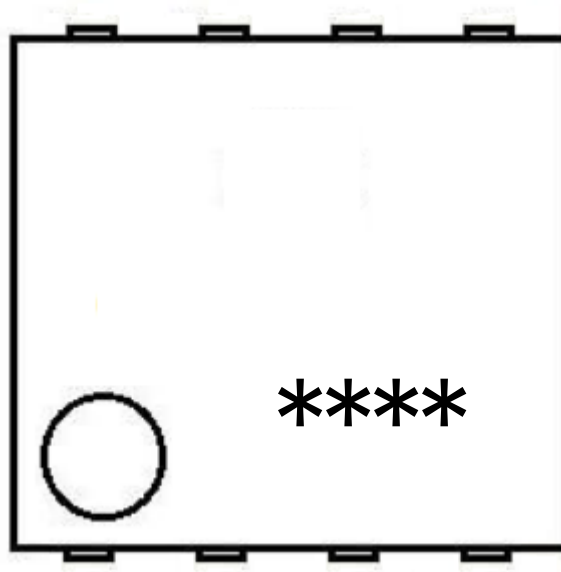

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

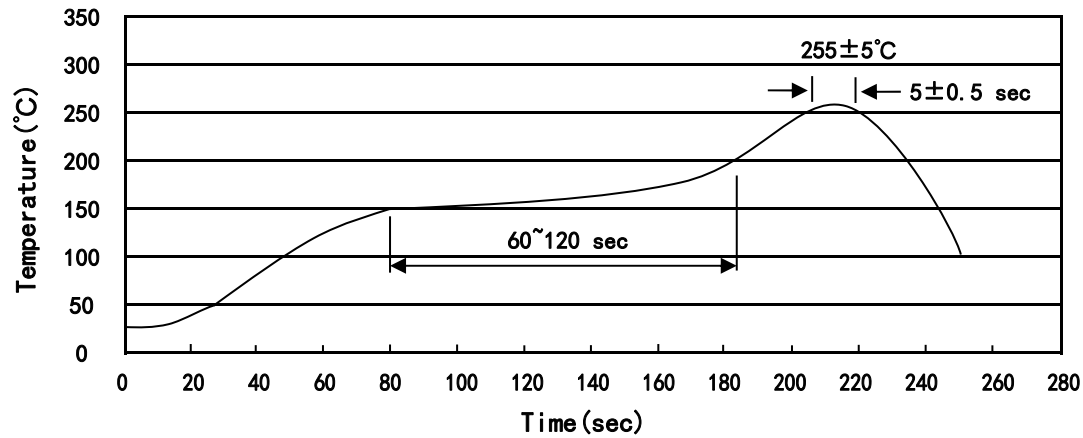 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						ρ		

/ Notices