


[illegible]

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

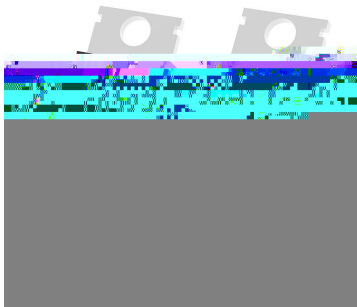

/ Marking



/ Absolute Maximum Ratings(Ta=25)

		℃		
		℃		
				℃
	≤	θ		℃
		θ		




/ Electrical Characteristics(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

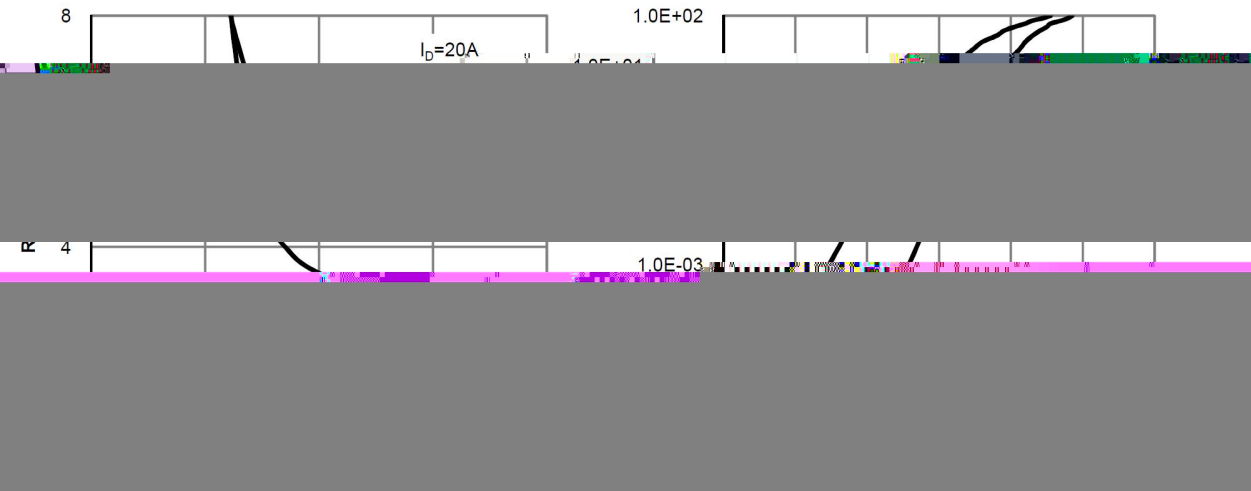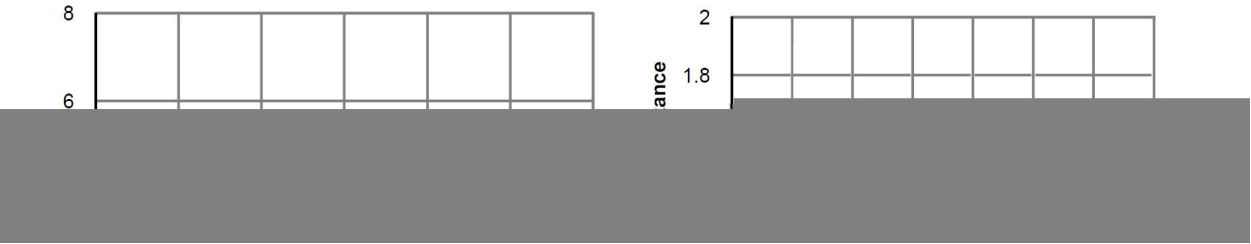

/ Electrical Characteristic Curve

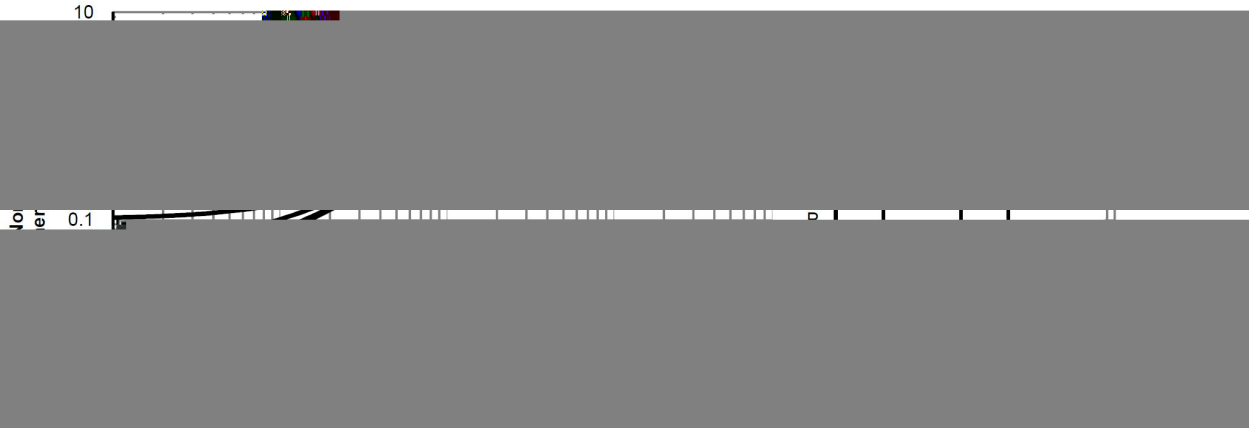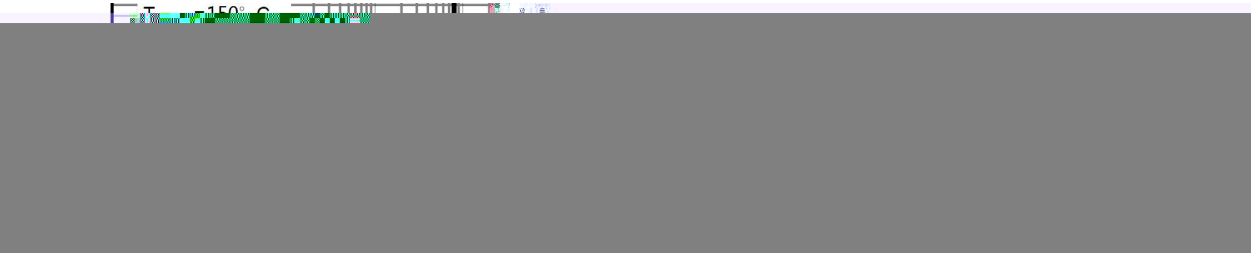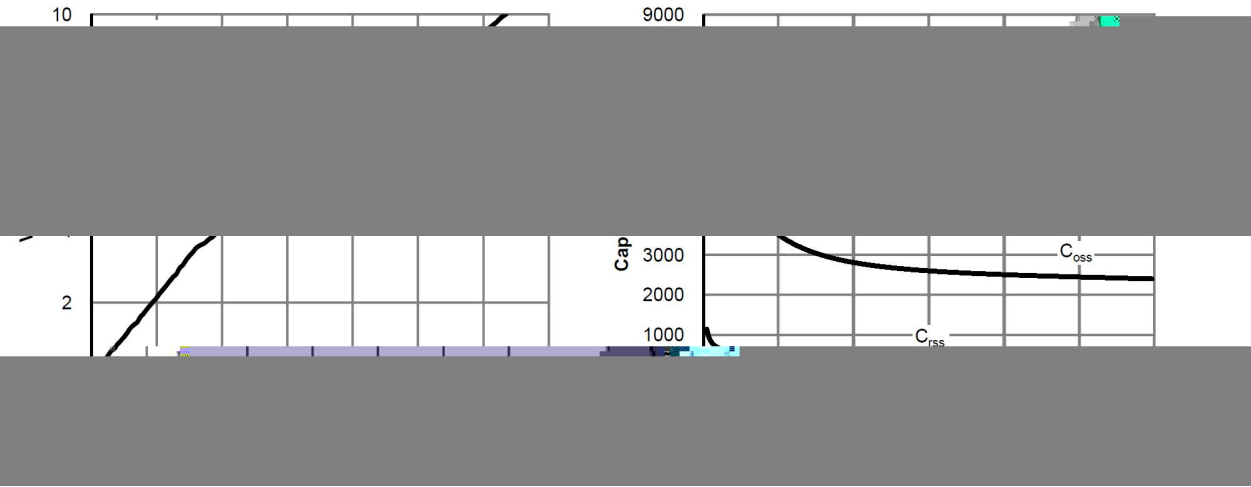


/ Package Dimensions

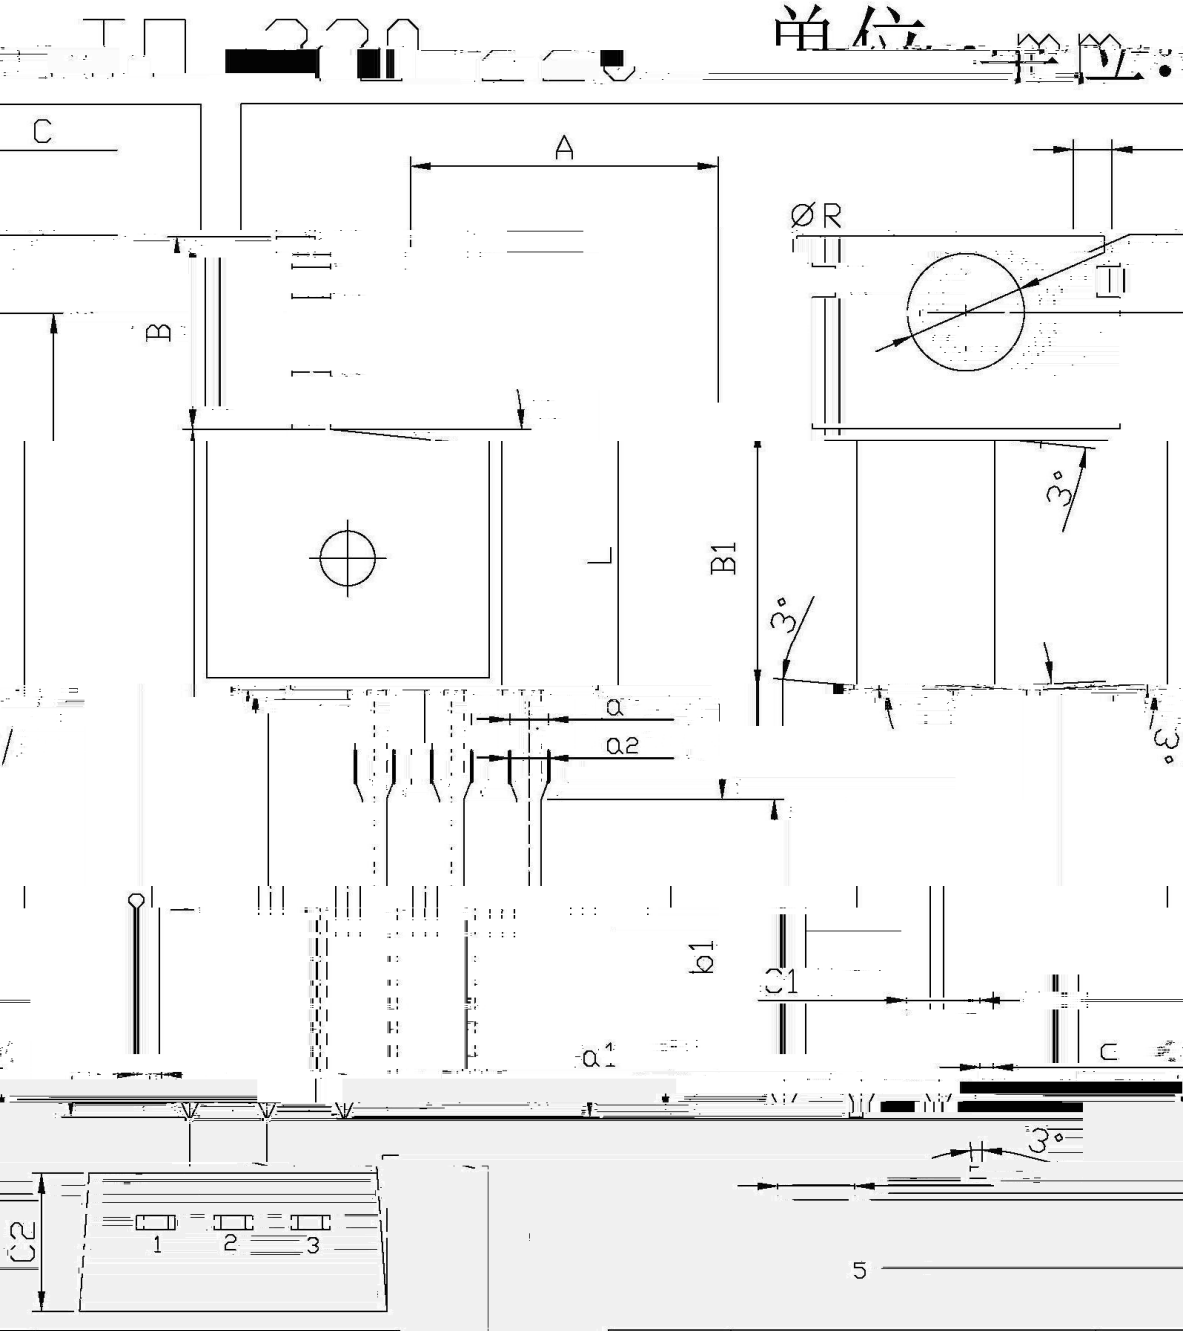

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
15.7	16.1	16.5	9.0	9.4	9.8
13.6	13.6	13.6	13.6	13.6	13.6
9.6	9.6	9.6	9.6	9.6	9.6
1.22	1.22	1.22	1.22	1.22	1.22
1.45	1.45	1.45	1.45	1.45	1.45
1.02	1.02	1.02	1.02	1.02	1.02
1.25	1.25	1.25	1.25	1.25	1.25


/ Marking Instructions

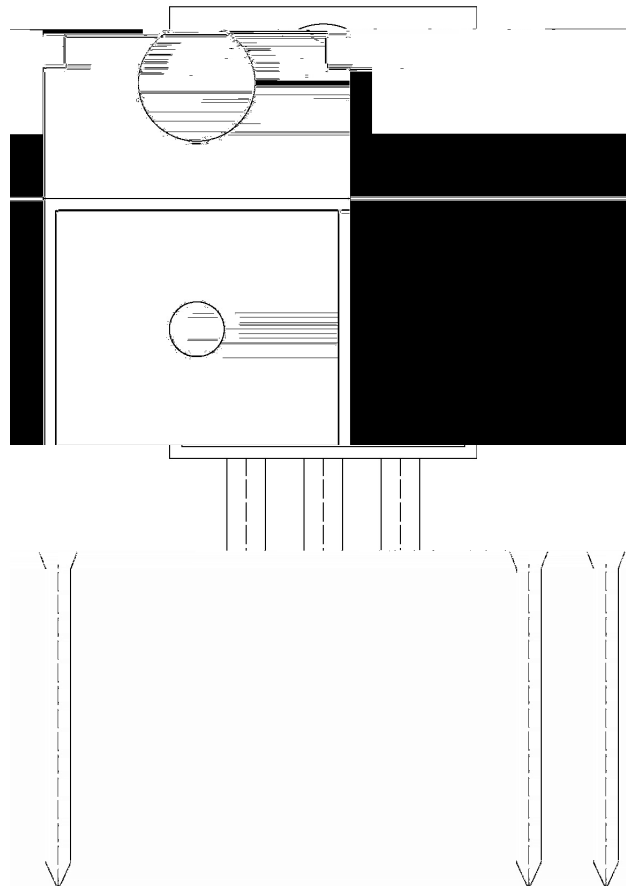

说明：

- ： 为公司代码
- ： 为型号代码
- ： 为生产批号代码，随生产批号变化

() / Temperature Profile for Dip Soldering(Pb-Free)

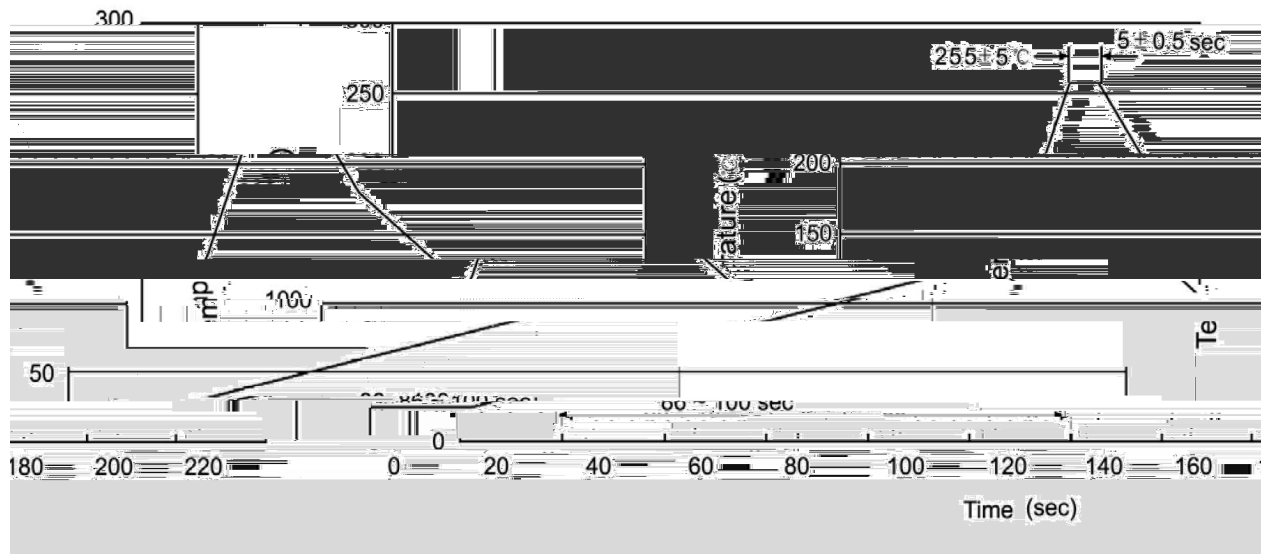

± °C ± °C ± °C

/ Resistance to Soldering Heat Test Conditions

± °C ± °C

/ Packaging SPEC.

	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices