

		±	



		Ω Ω				

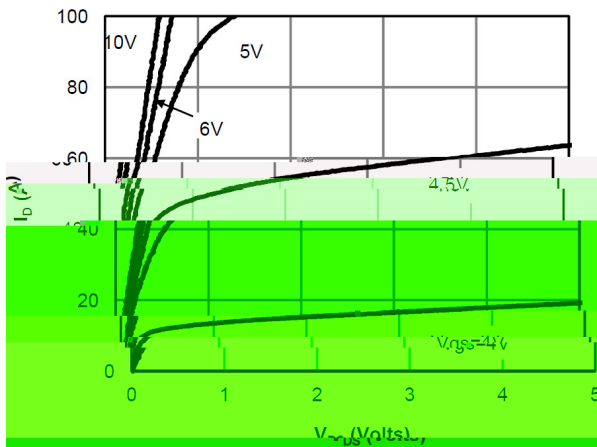


Fig 1: On-Region Characteristics


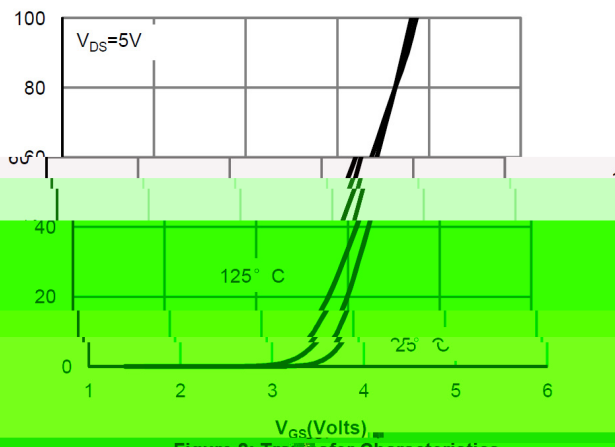


Figure 2: Transfer Characteristics

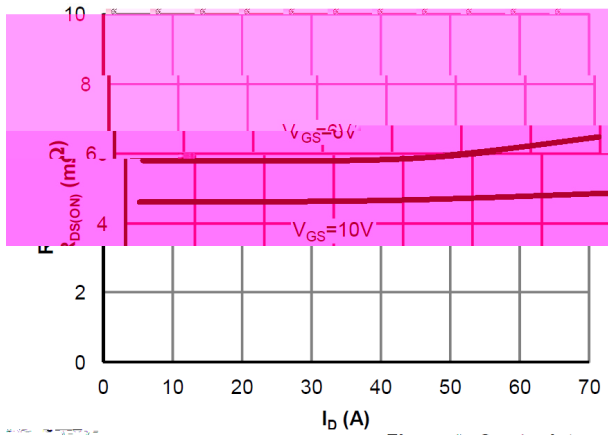

vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

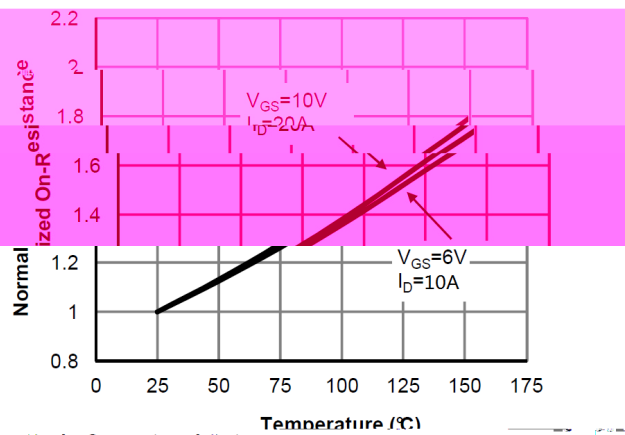


Figure 4: On-Resistance vs. Temperature

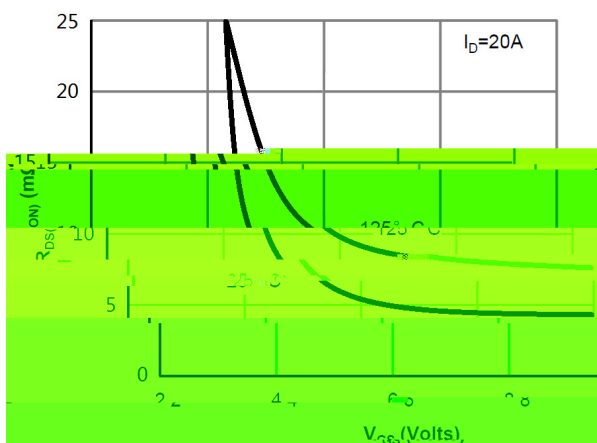


Figure 5: On-Resistance vs. Gate-Source Voltage

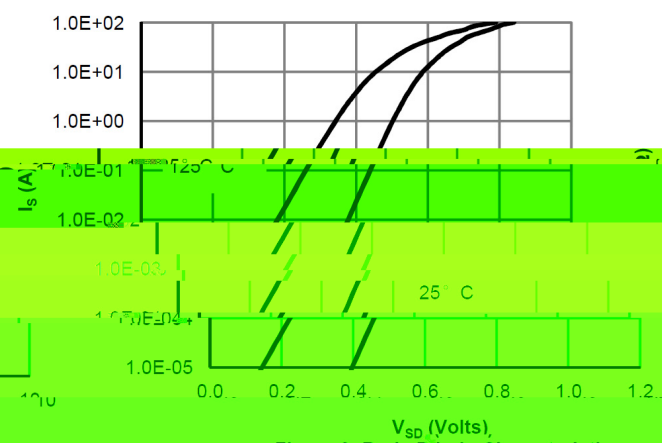


Figure 6: On-Resistance vs. Drain-Source Voltage

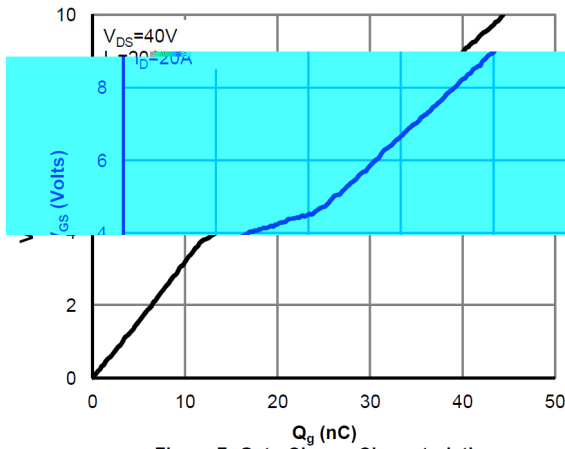


Figure 7: Gate-Charge Characteristics

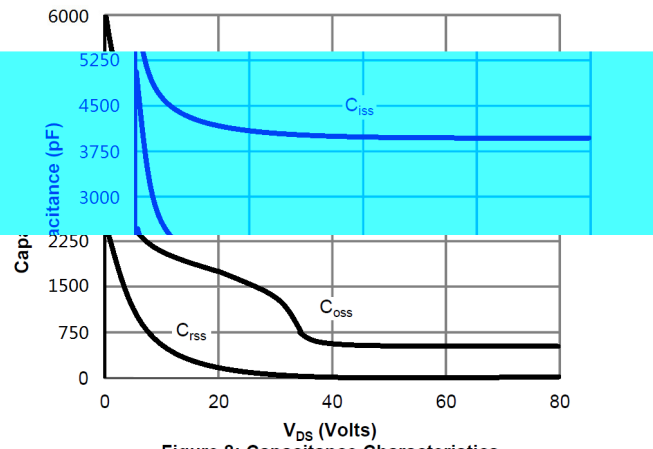


Figure 8: Capacitance Characteristics

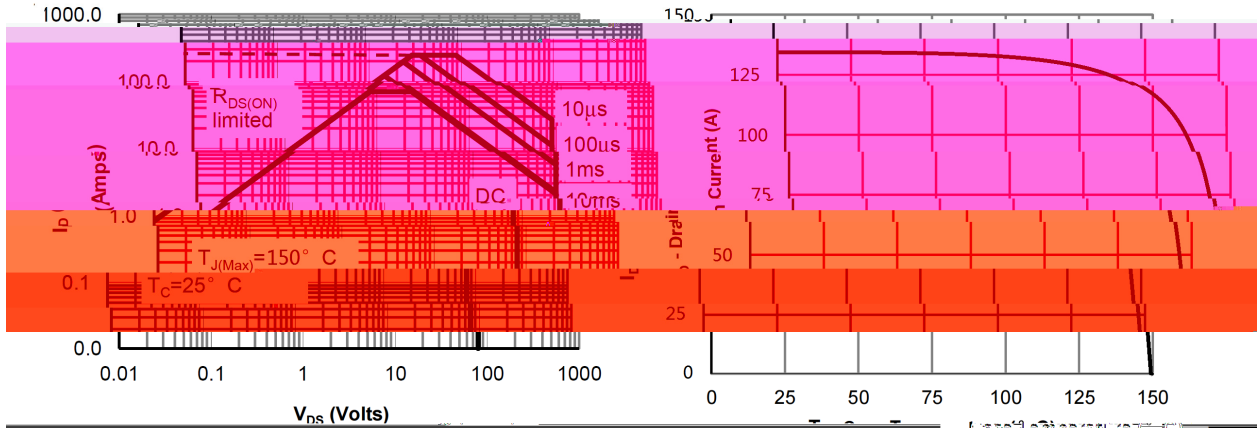


Figure 9: Maximum Continuous Drain Current vs Case Temperature

Figure 10: Maximum Continuous Drain Current vs Case Temperature



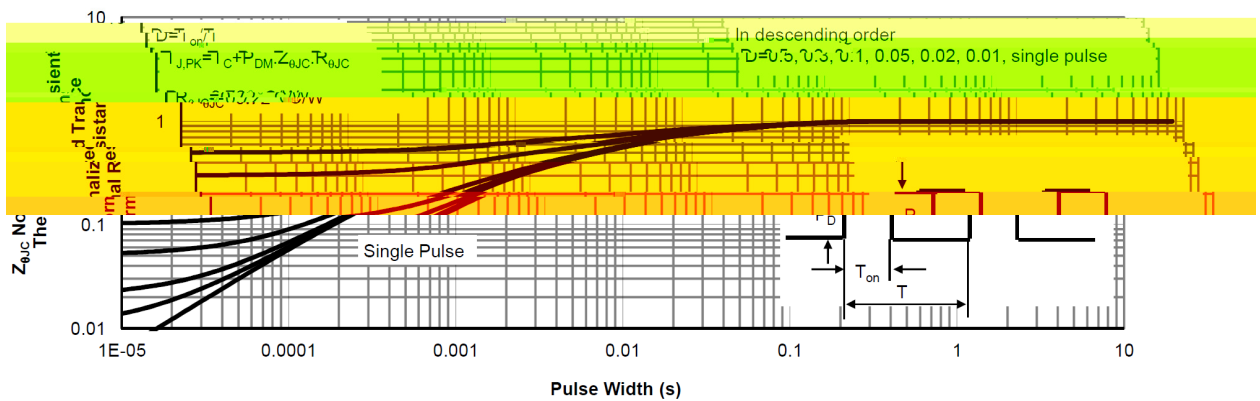


Figure 11: Normalized Maximum Transient Thermal Impedance

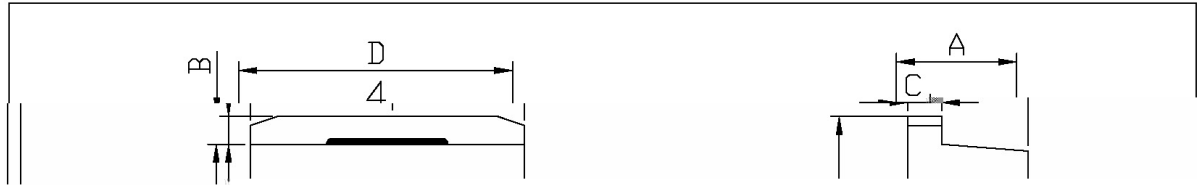


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	F	0.00	0.10
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	

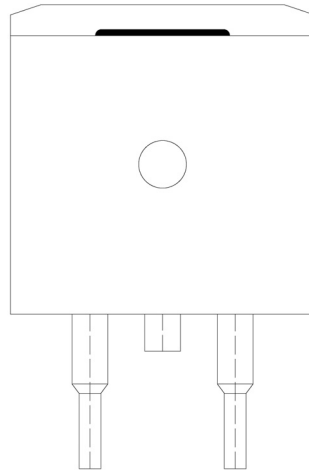

EU

388Q3;VK

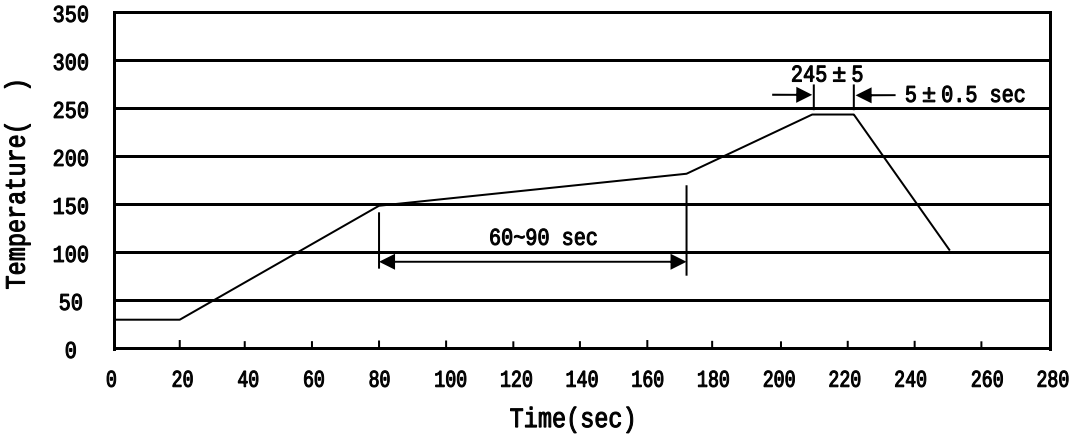

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

$\frac{3}{8}$

2

2

$\frac{3}{8}$

2

$\frac{3}{8}$

