
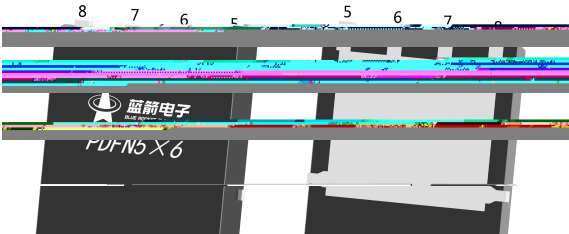


A	2022.5.27	All	AOS-AON6284		

X

°
X





)ITJ ET BT 6.96
\$)ITJ 6784629.960
40004 65.1m0 Tm²⁸


/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve

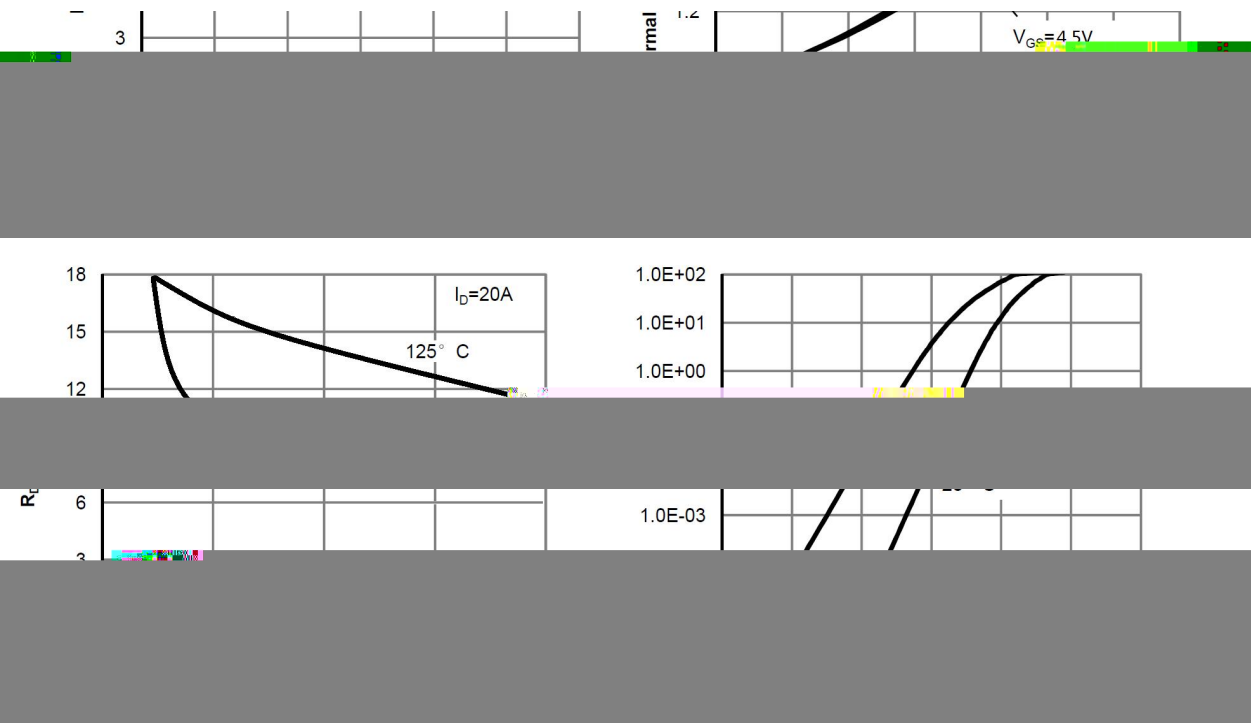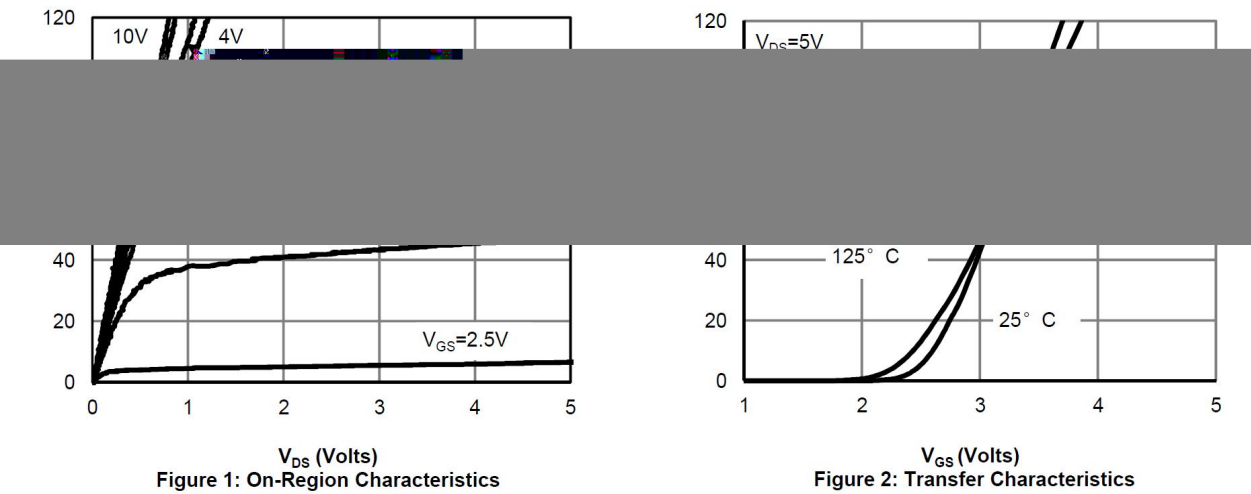

/ Electrical Characteristic Curve

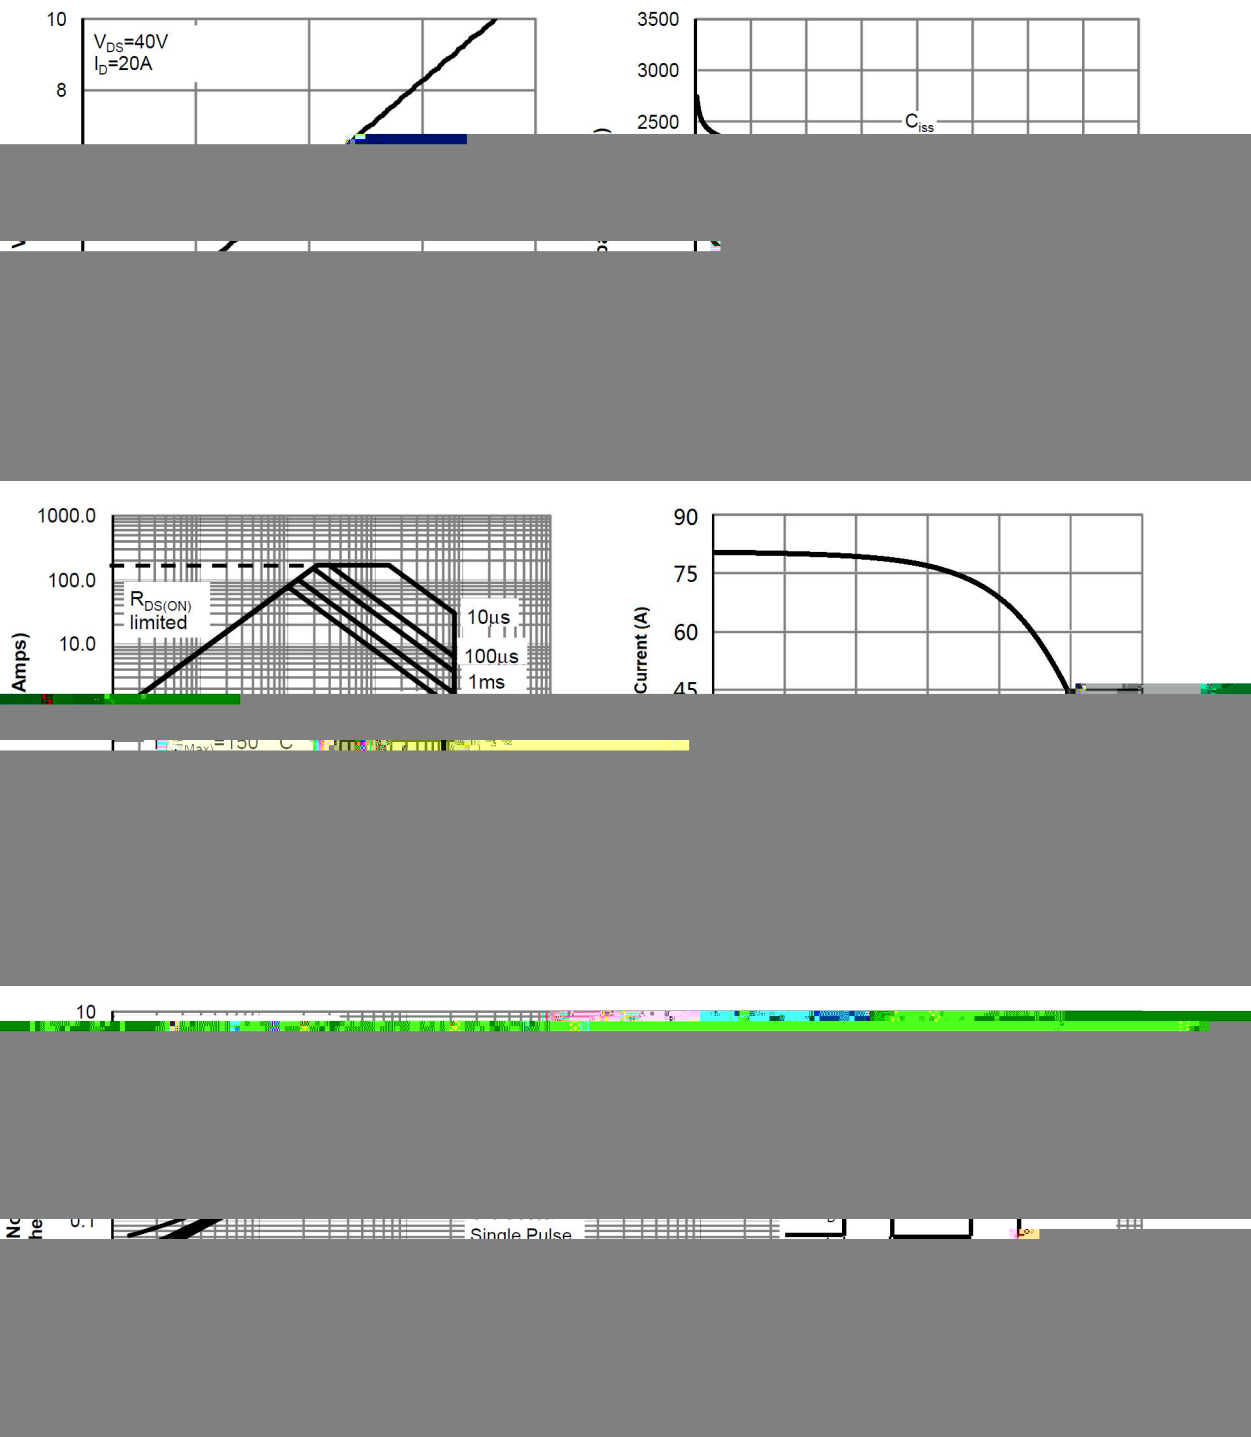


/ Package Dimensions

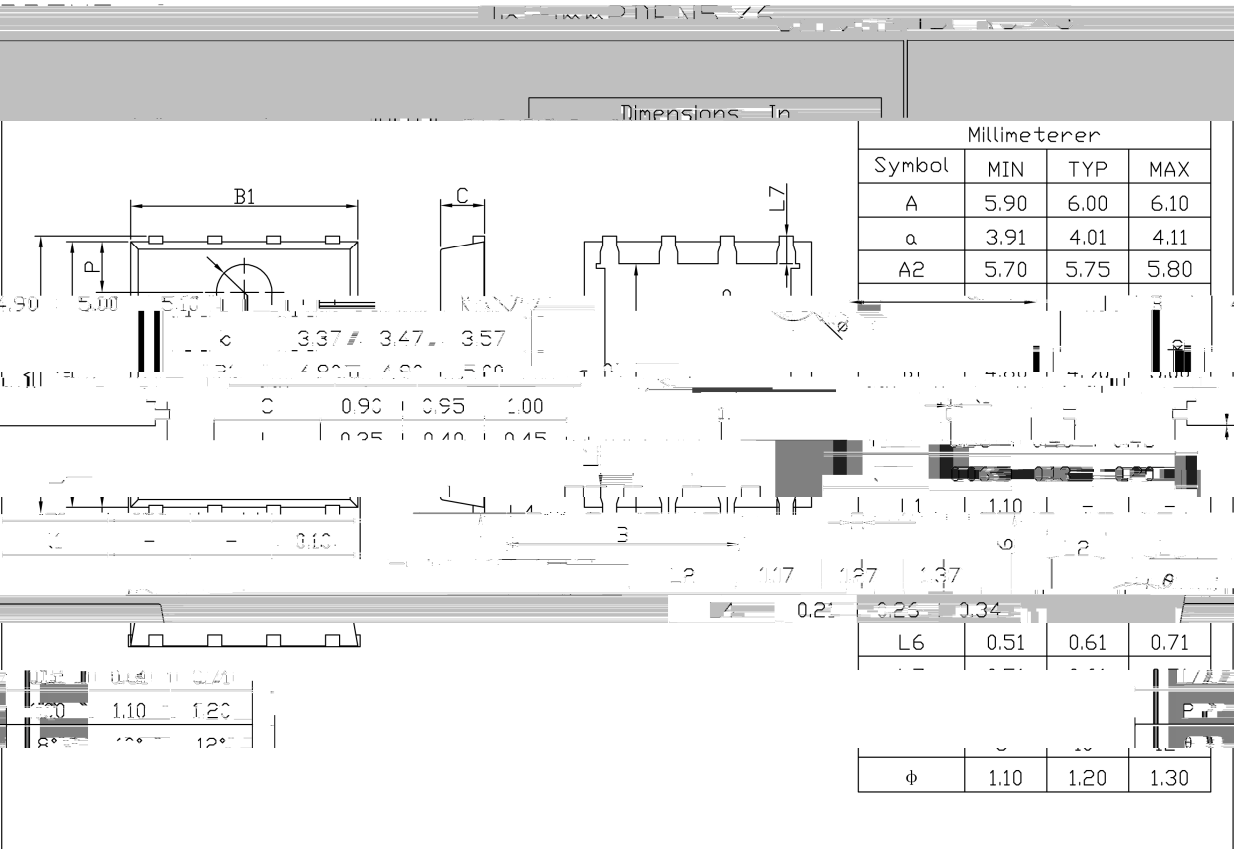


Rev.00 201812

/ Marking Instructions

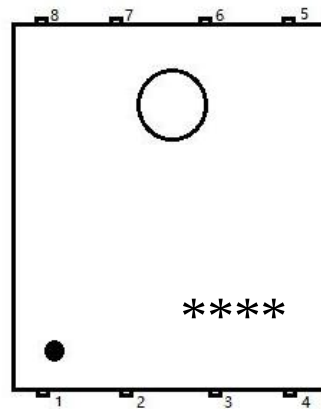

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

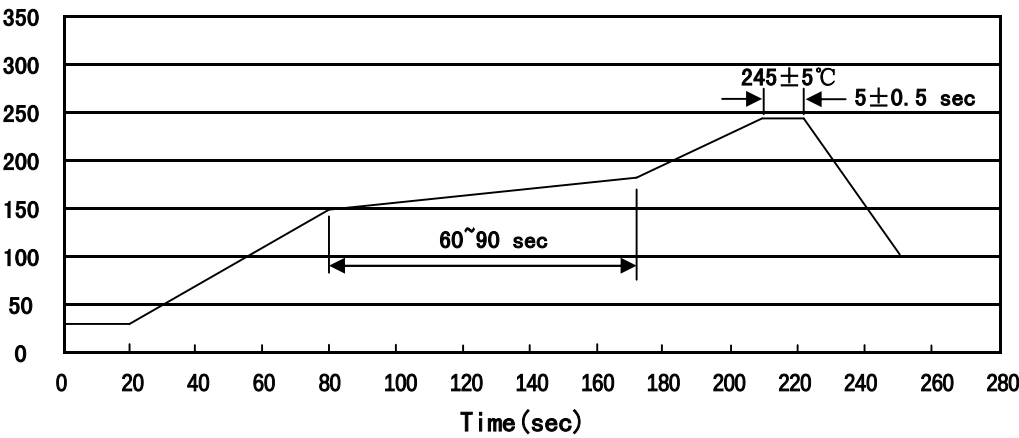

± °C

± °C

± °C

± °C

/ Resistance to Soldering Heat Test Conditions

± °C

± °C

± °C

± °C

/ Packaging SPEC.

	包装数量					包装尺寸		
	只/卷盘	卷盘/盒	只/盒	盒/箱	只/箱			
×						×	×	×

/ Notices