


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

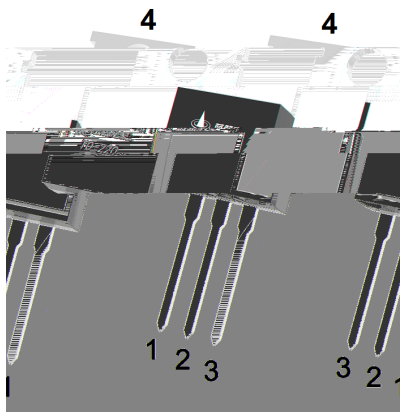

/ Marking

/ Absolute Maximum Ratings(T_a=25)

			±	
		θ		
		θ		




/ Electrical Characteristics(T_a=25)

Drain-Source Breakdown Voltage						
					±	




/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

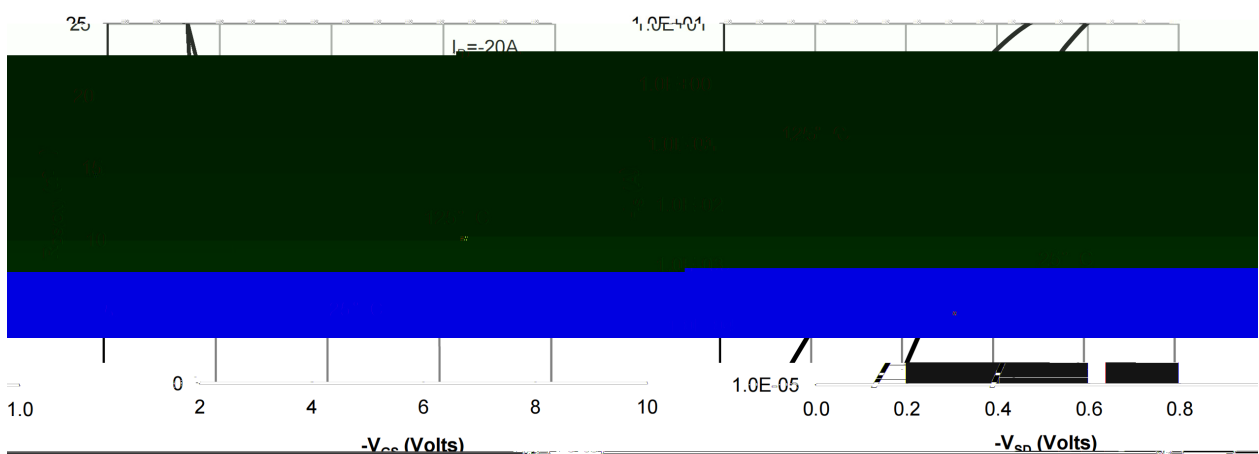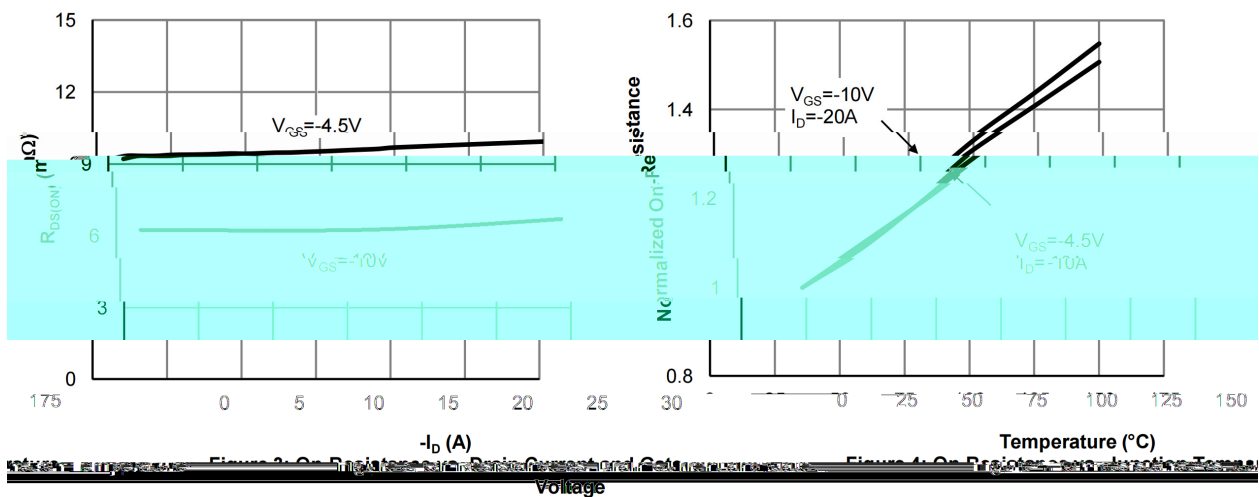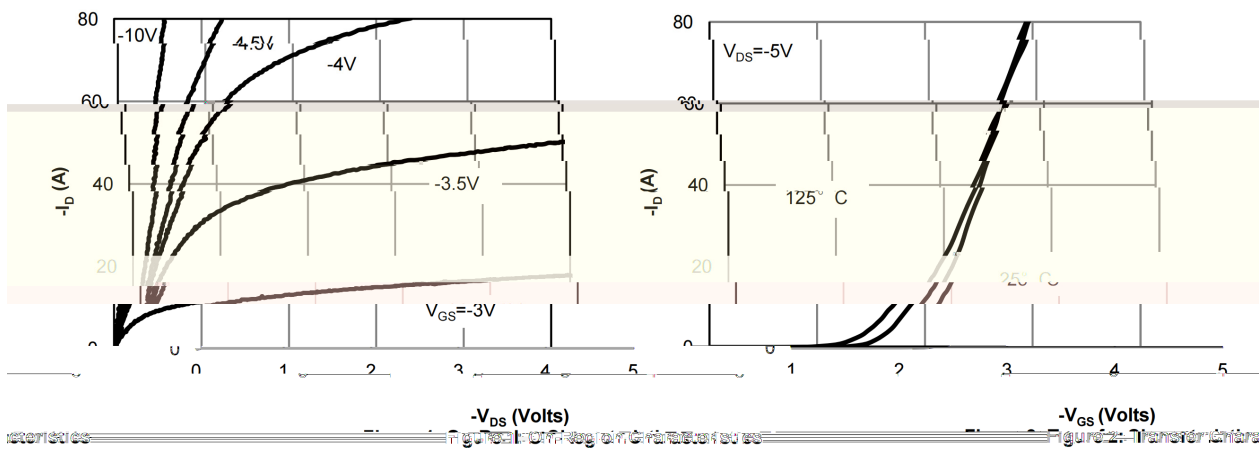


/ Electrical Characteristic Curve

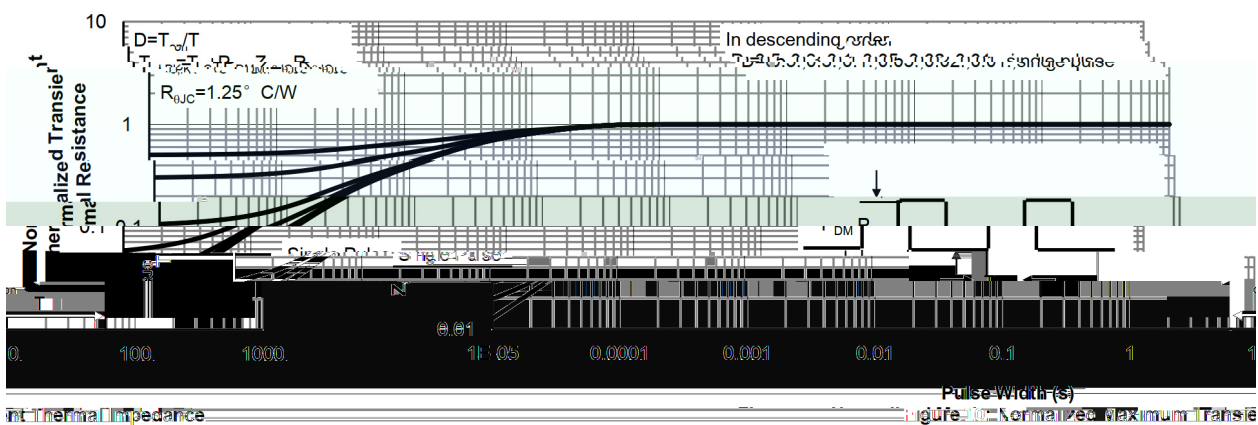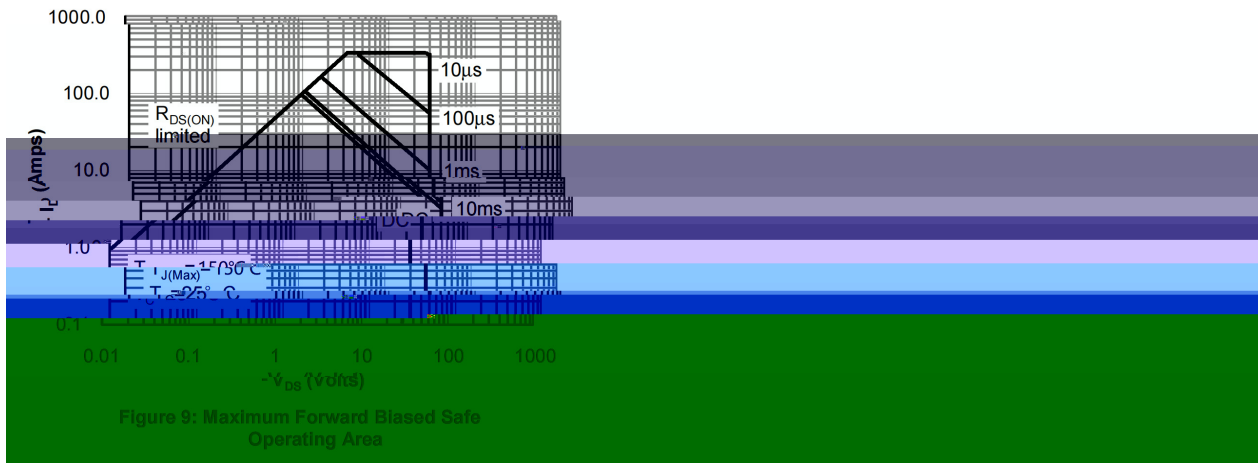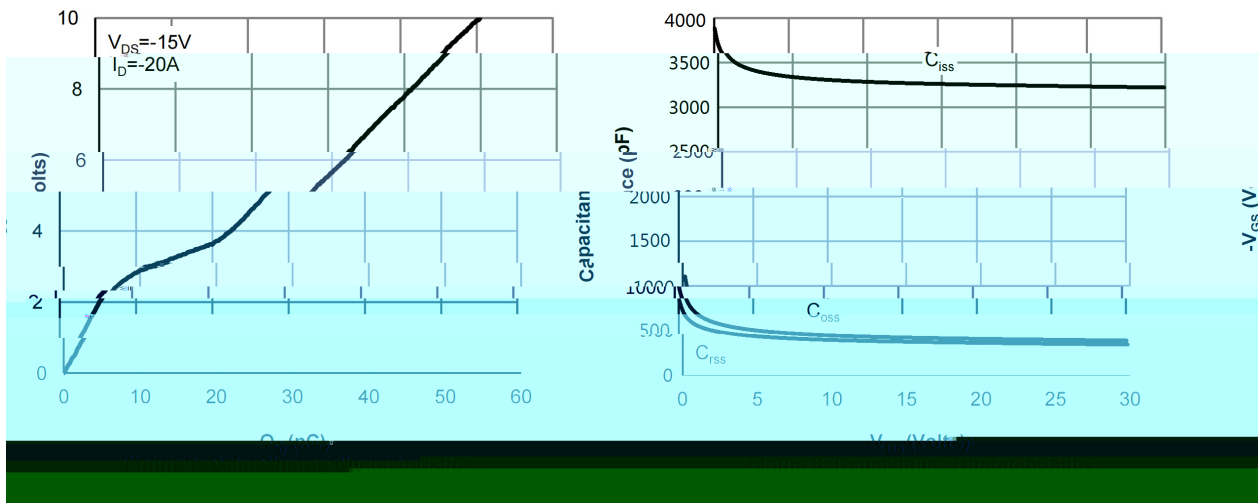

/ Package Dimensions


T□-220

单位: mm

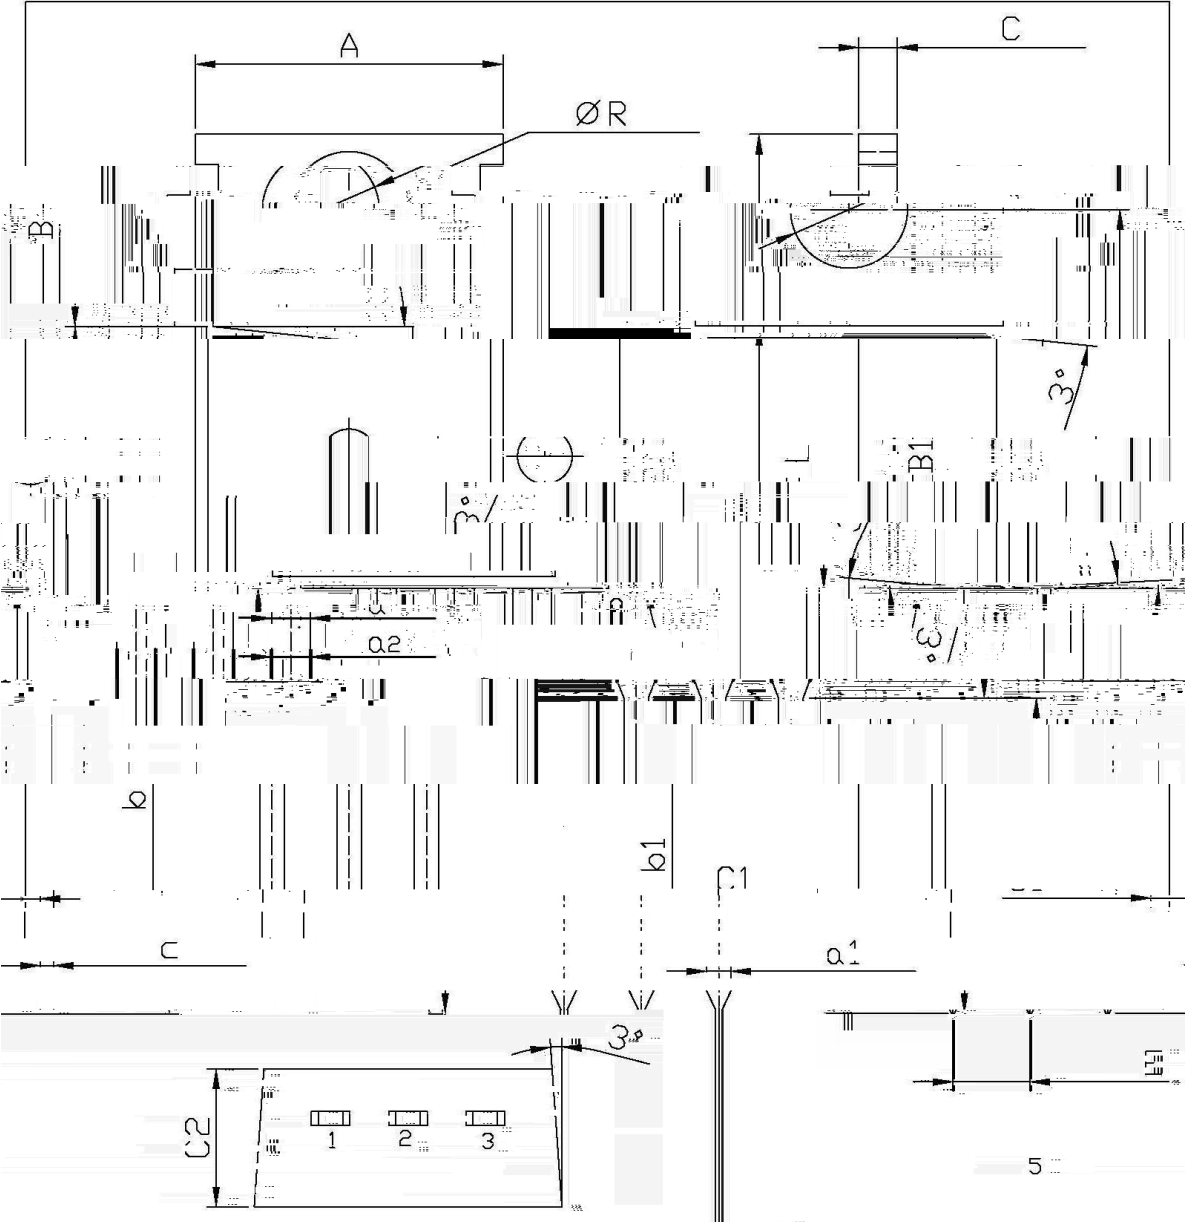


Dimensions In Millimeters				Dimensions In Millimeters			
Max	Symbol	Min	Max	Min	Symbol	Max	Min
1.4	A	9.8	10.2	1.2	C	6.7	6.3
6.7	R	3.56	3.64	9.0	B1	9.4	8.6
2.6	b	12.6	13.6	2.2	c1		

/ Marking Instructions

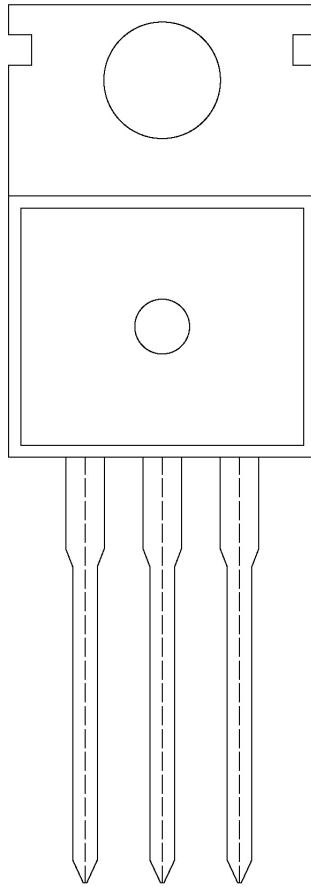

() / Temperature Profile for Dip Soldering(Pb-Free)

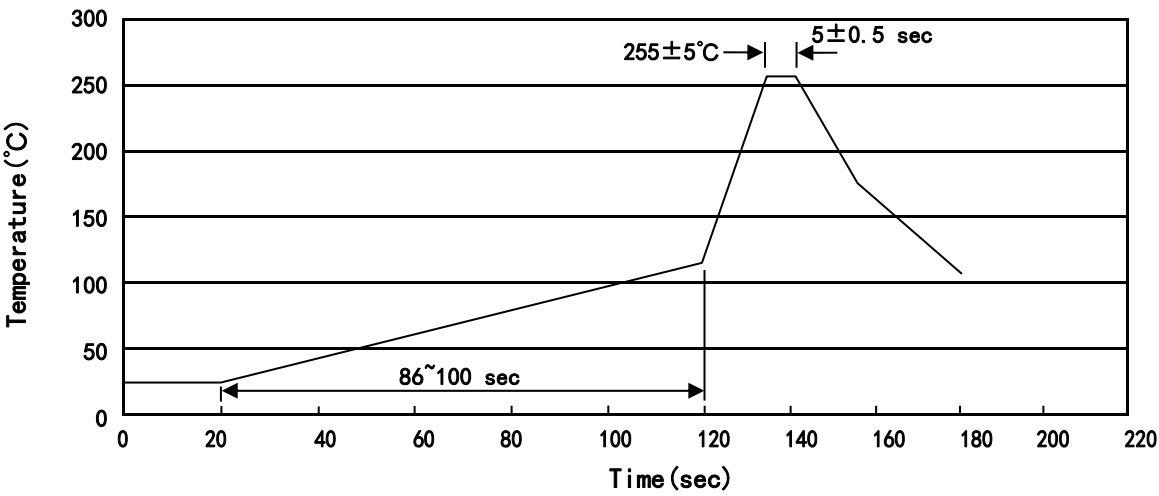

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices