

/ Descriptions

PDFN3×3A-8L P MOS


x

/ Features


/ Applications

/

/ Equivalent Circuit



/ Pinning

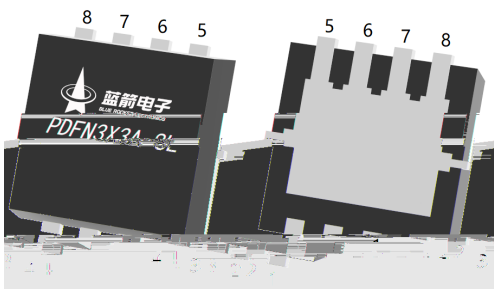

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

/ Marking

[illegible]

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						Ω
						Ω

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

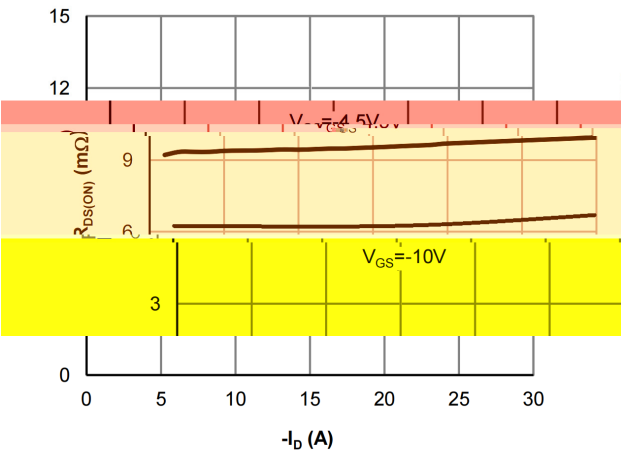
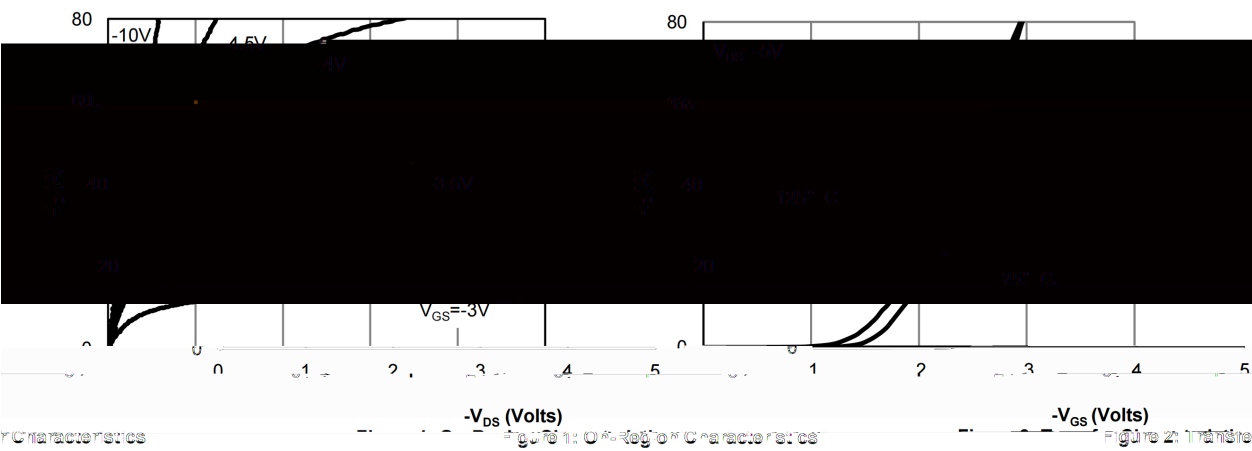


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

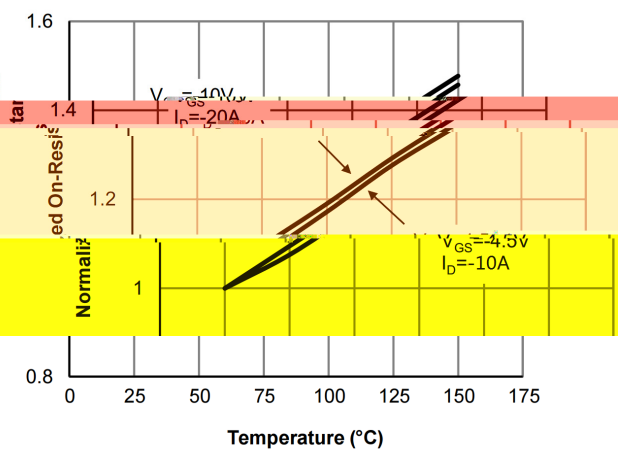


Figure 4: On-Resistance vs. Junction Temperature

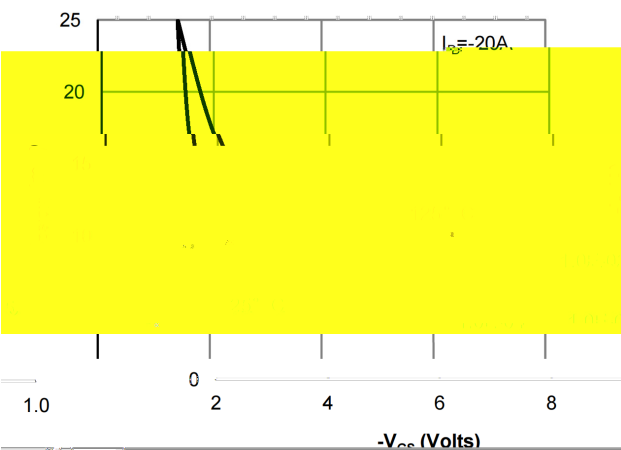


Figure 5: On-Resistance vs. Gate-Source Voltage




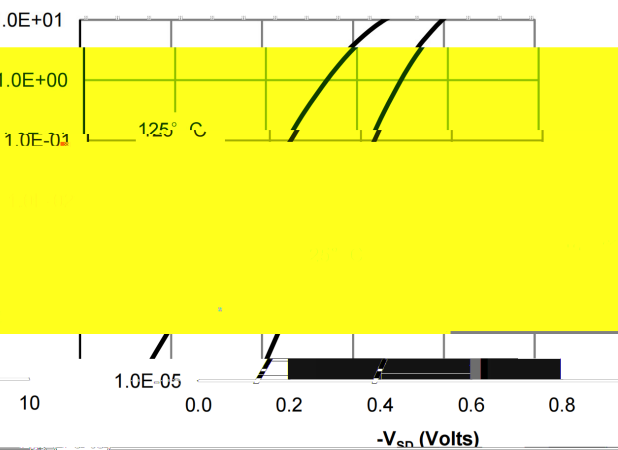


Figure 6: Body-Diode Characteristics


/ Electrical Characteristic Curve

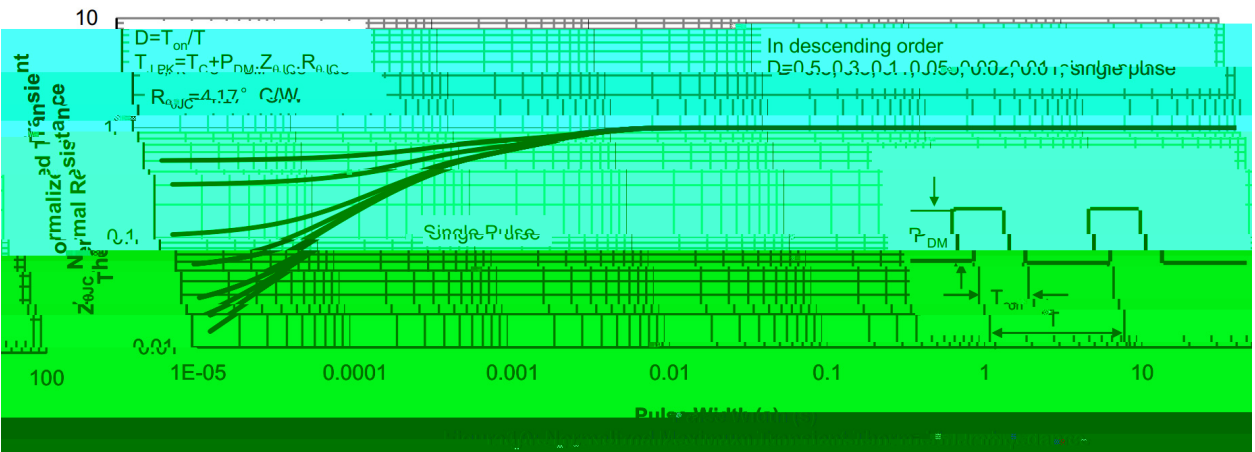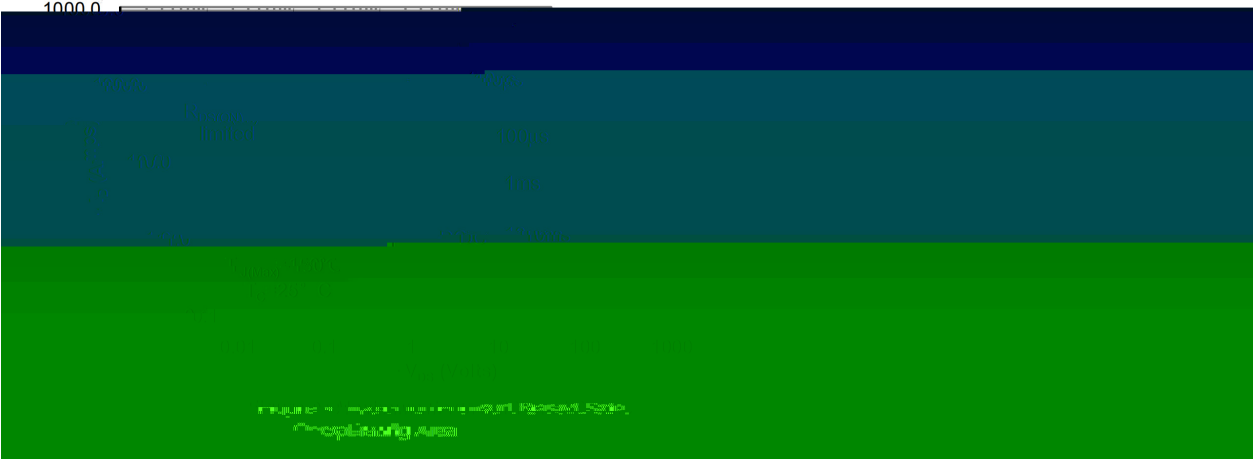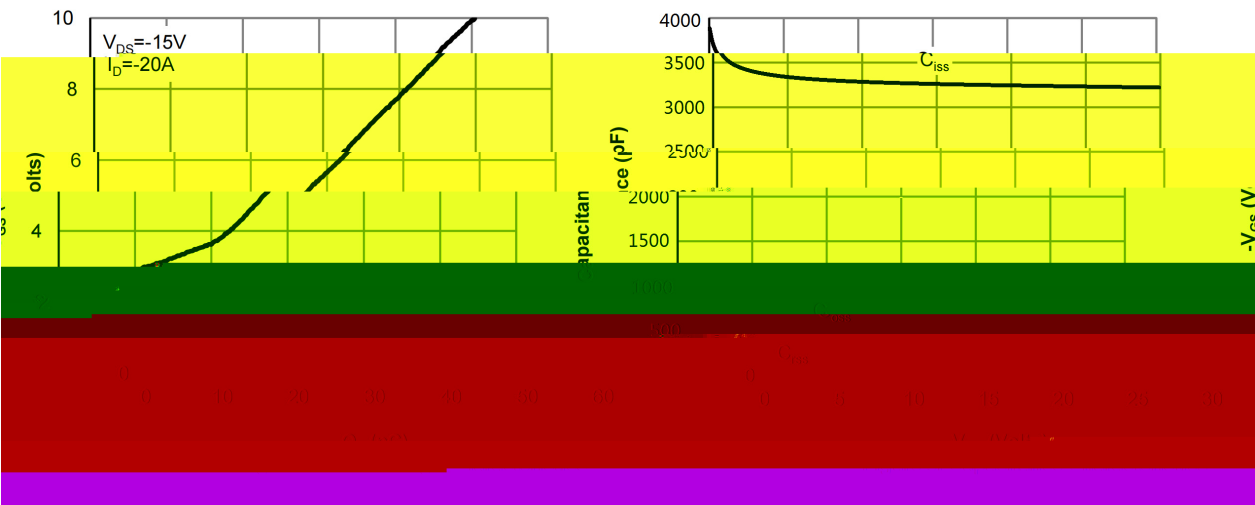

/ Package Dimensions


PDFN3X3A-8L


Unit:mm

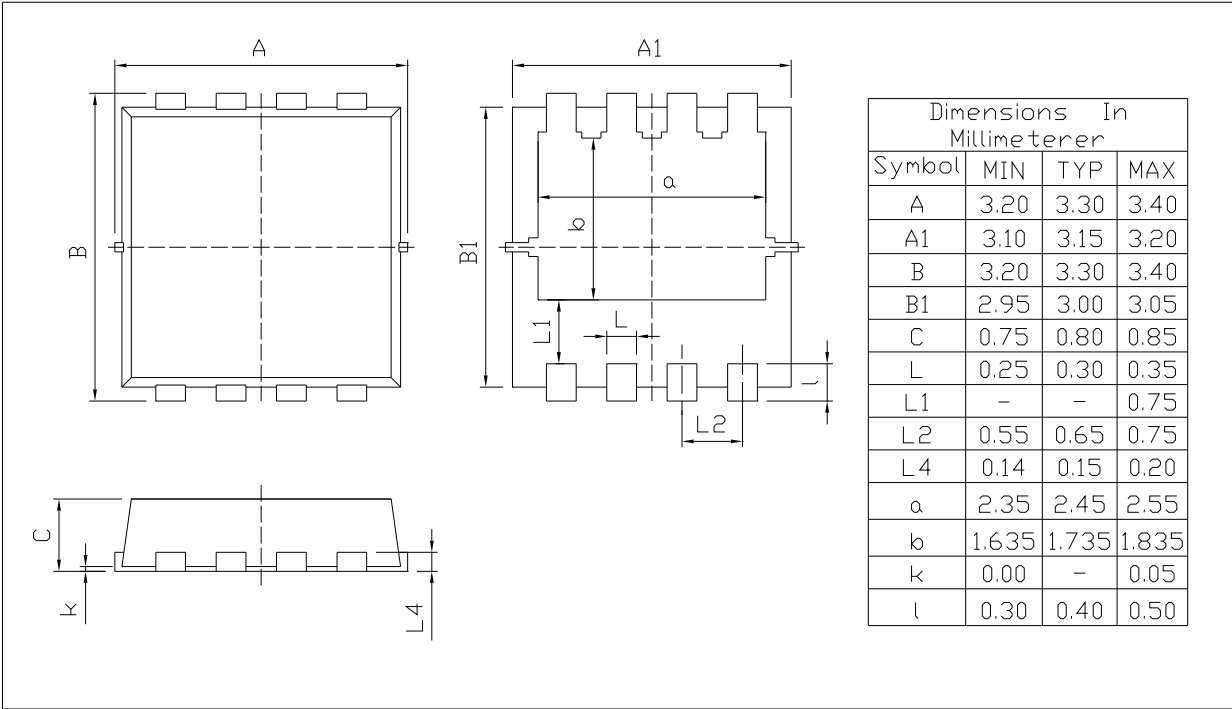

Rev.00 202011

/ Marking Instructions

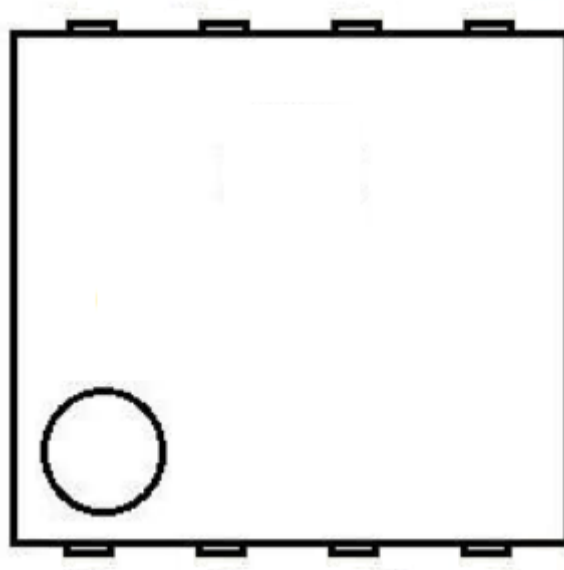

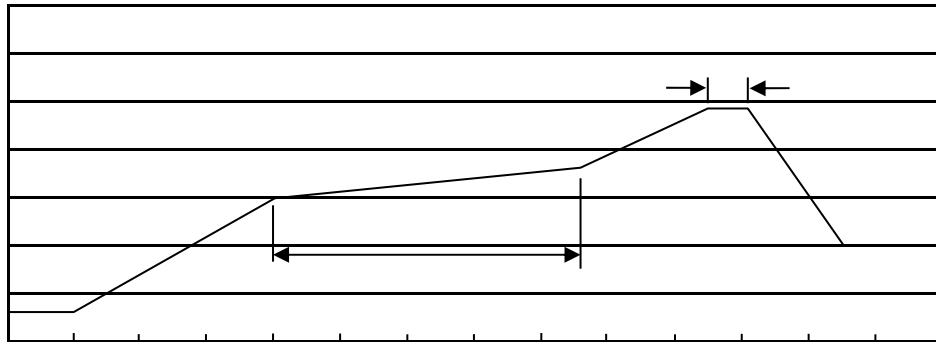 $\pm$ $\pm$

8 8