

PDFN3×3-8L



-

Ω

Ω

Ω

Ω


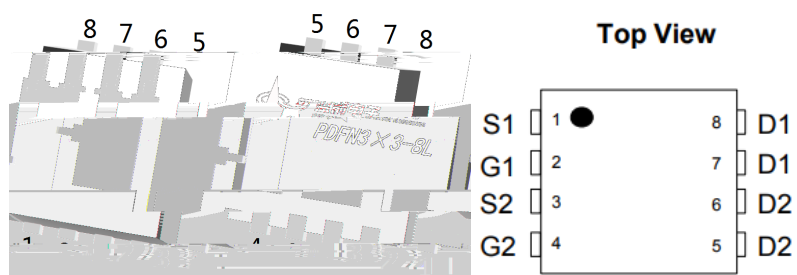





	0			

I

		μ				
						μ
		μ				
						Ω
						Ω
						Ω
		Ω Ω				

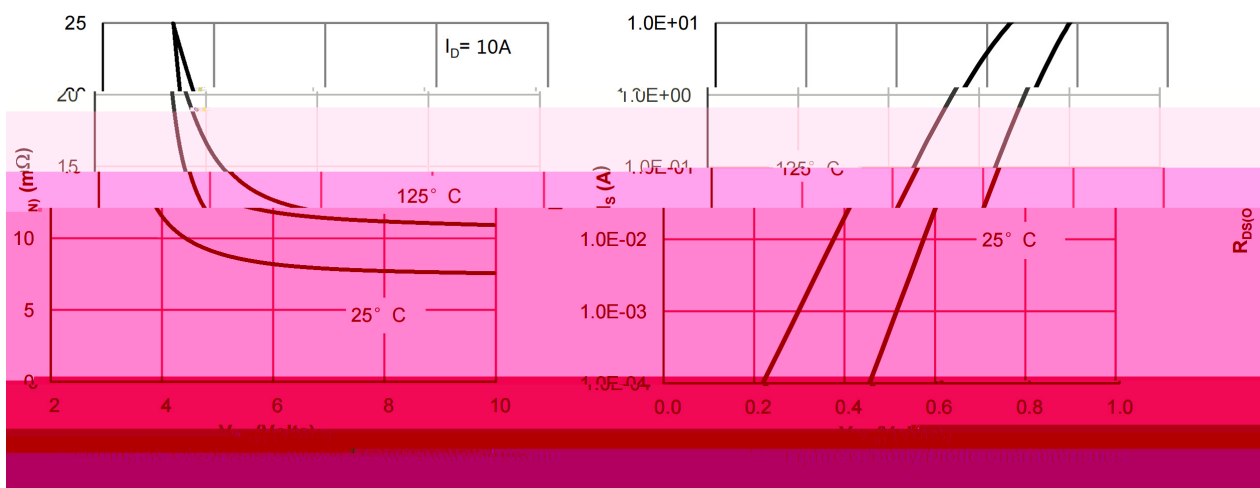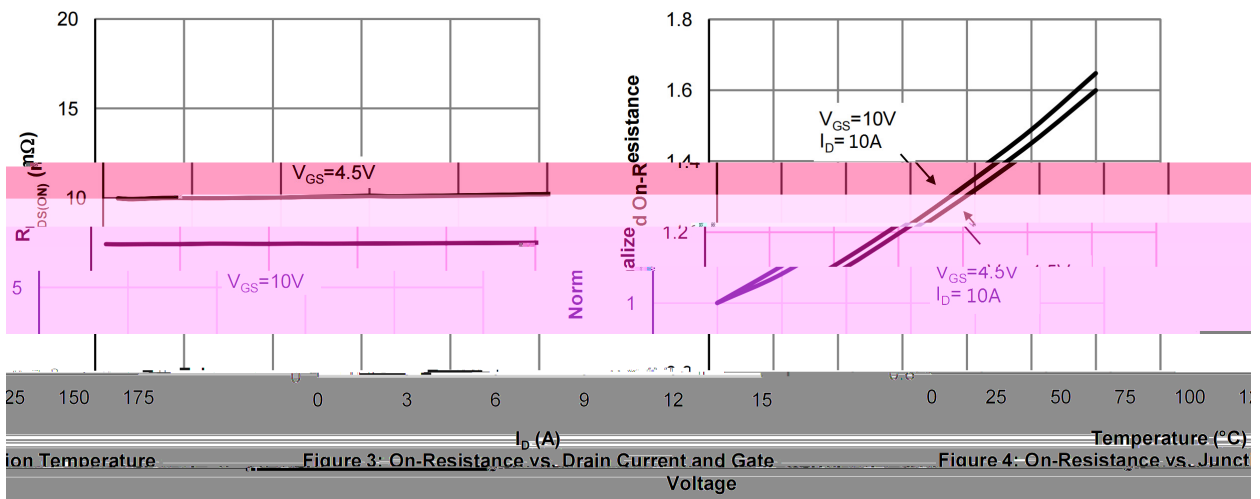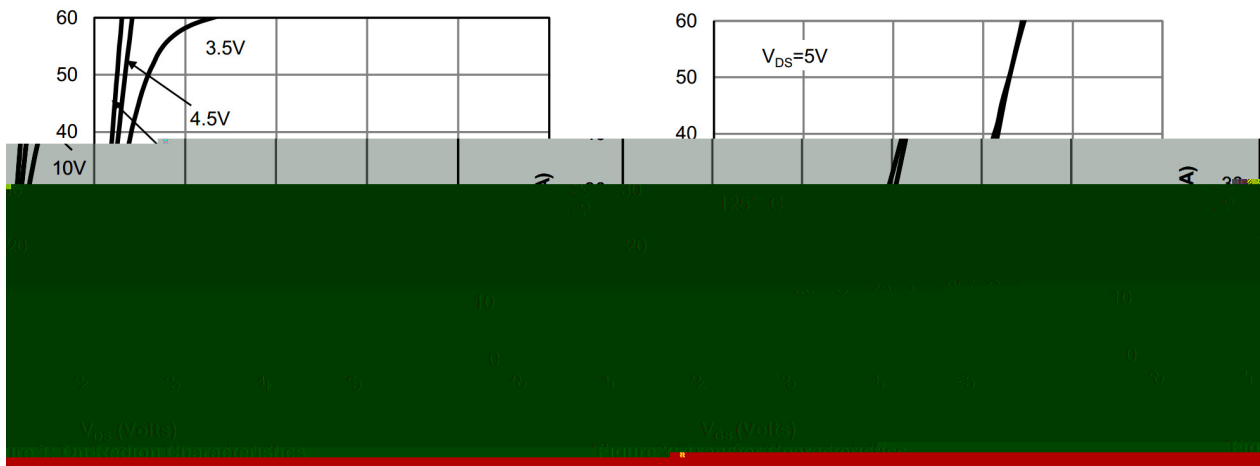









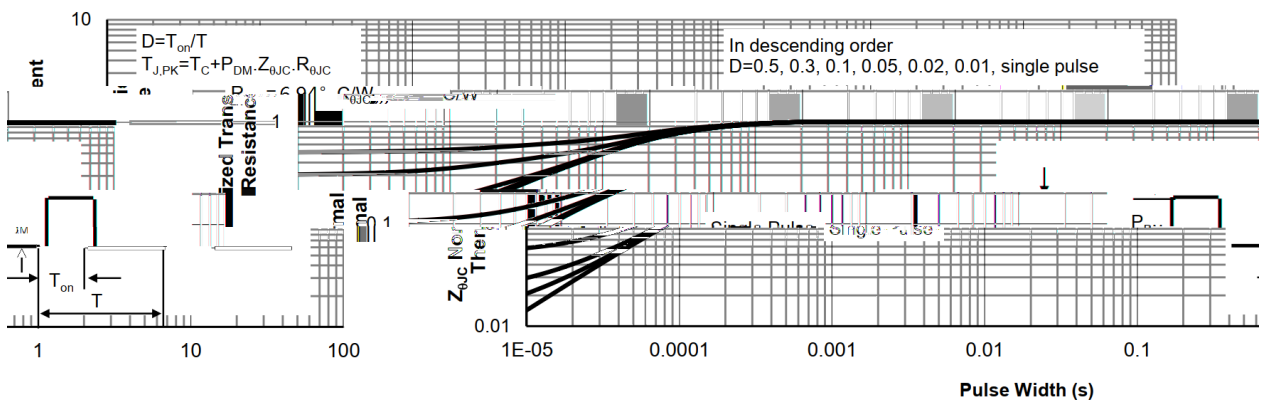


Figure 10: Normalized Maximum Transient Thermal Impedance

I


		μ				
						μ
					±	
		μ				
						Ω
						Ω
						Ω
		ΩΩ				

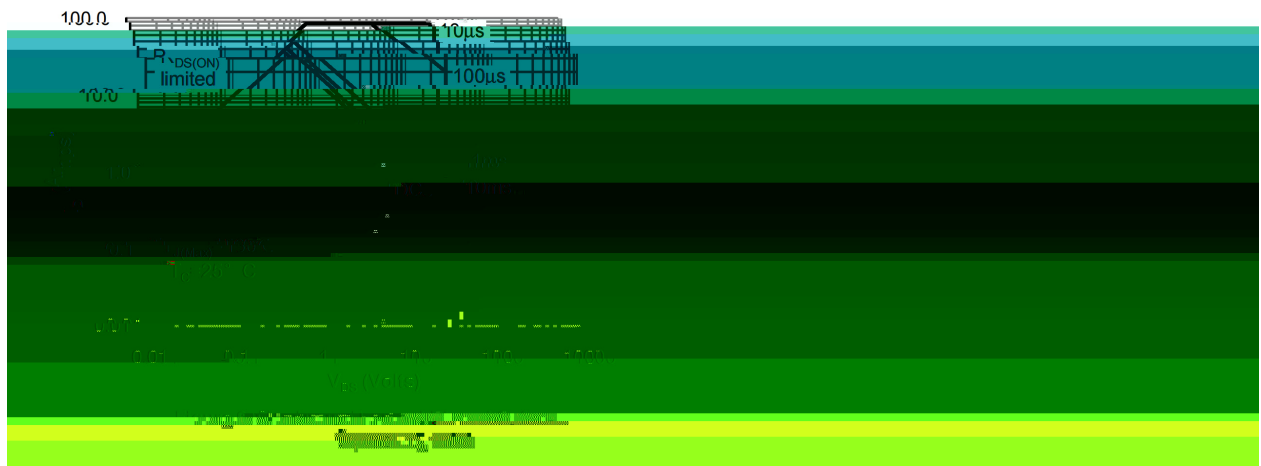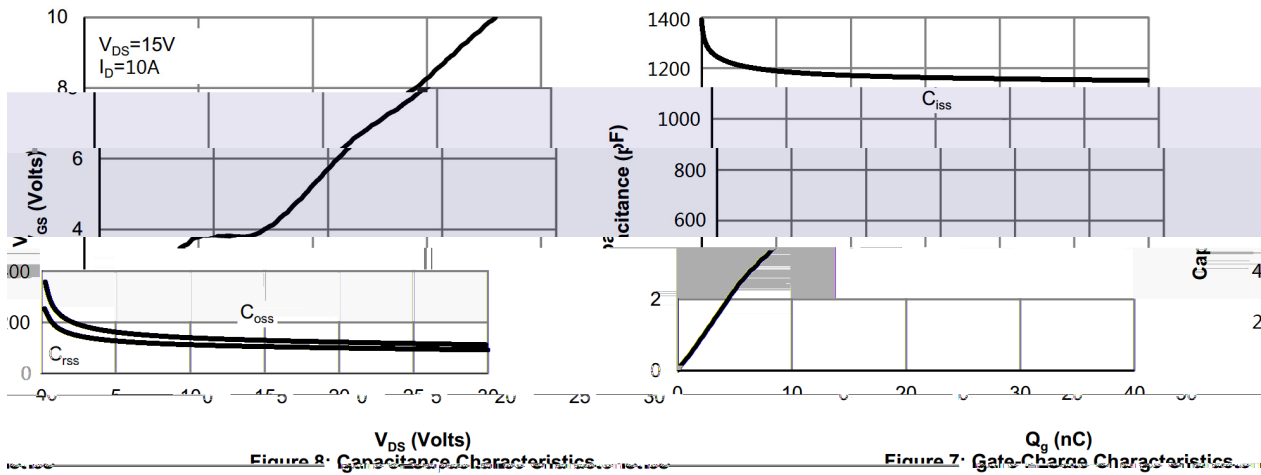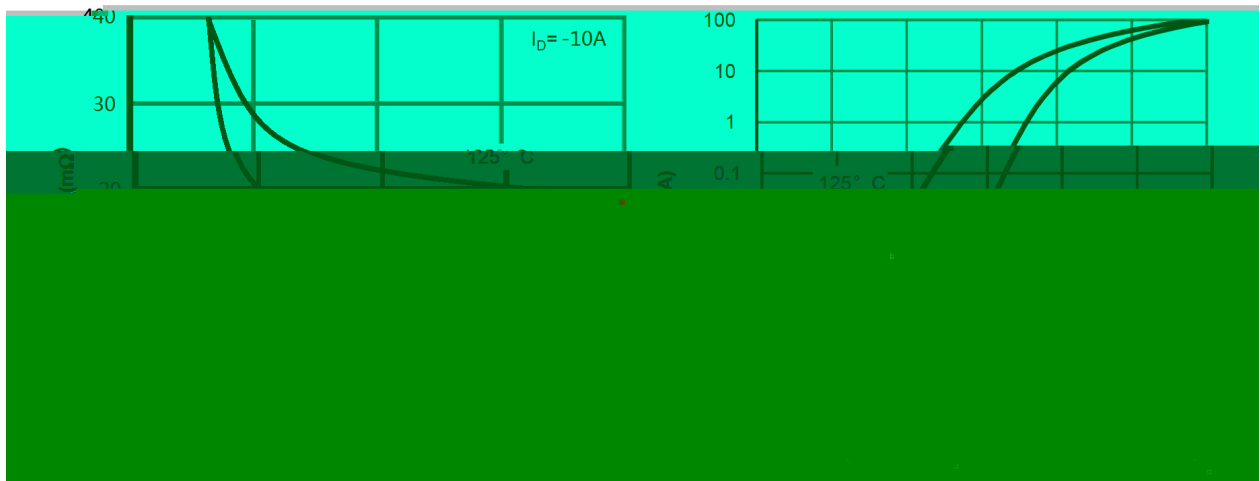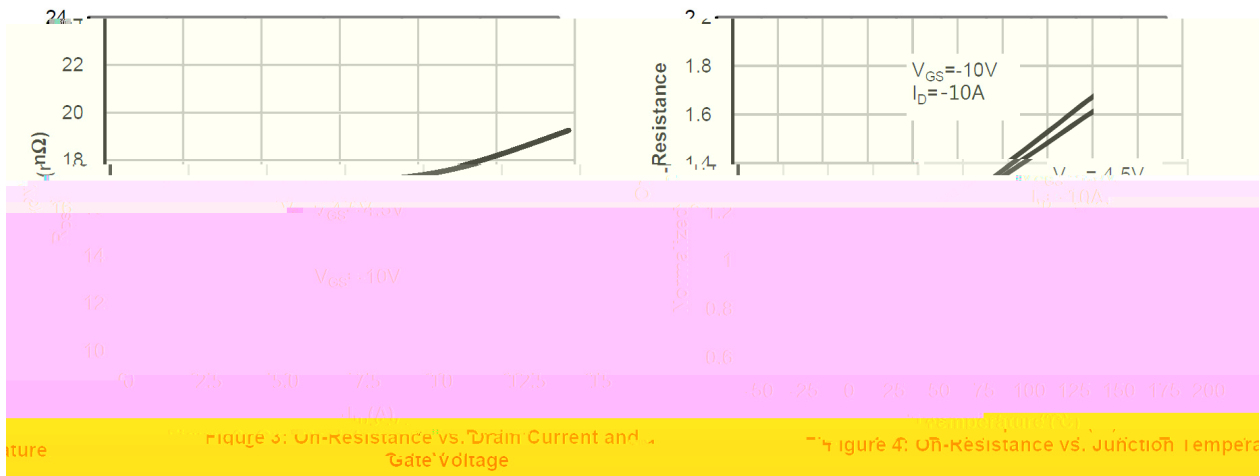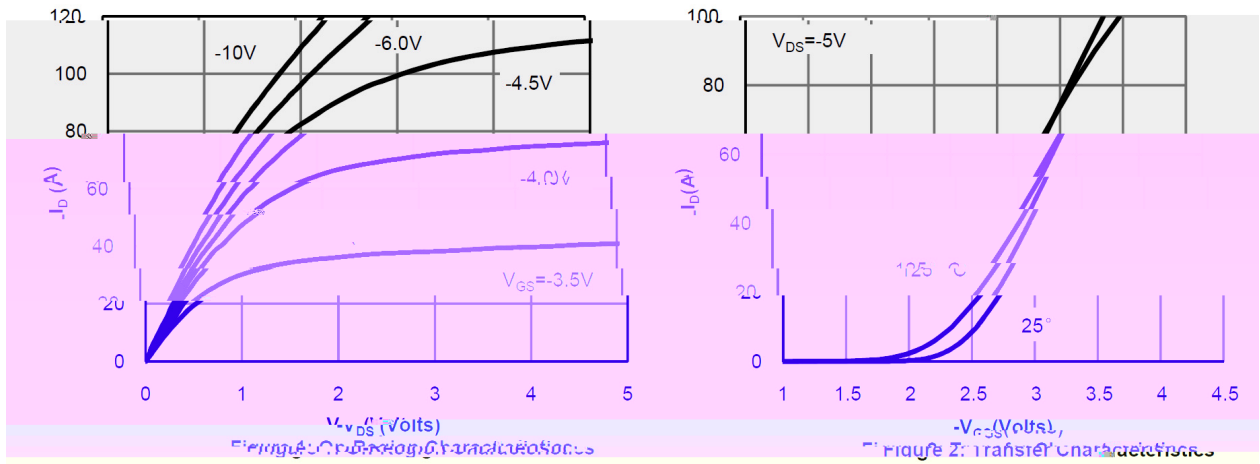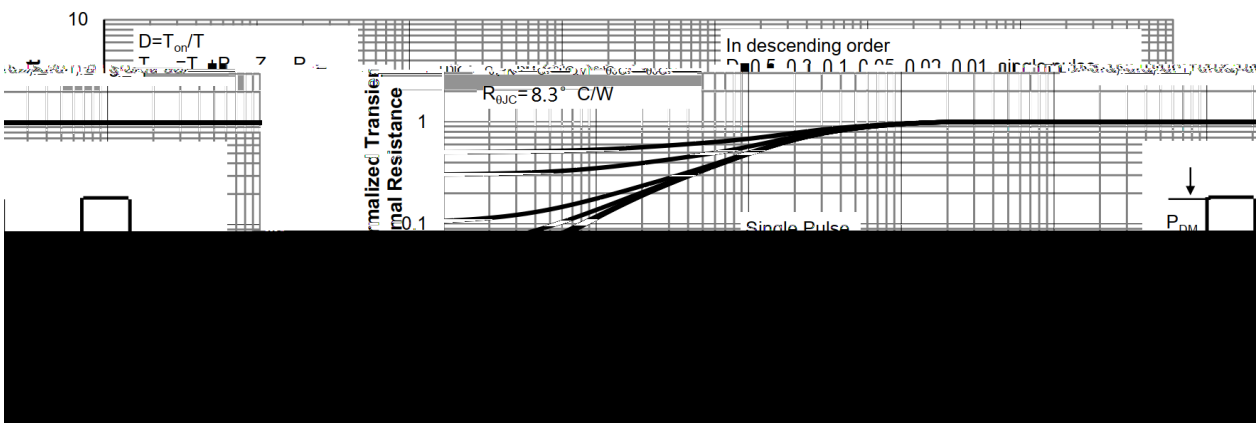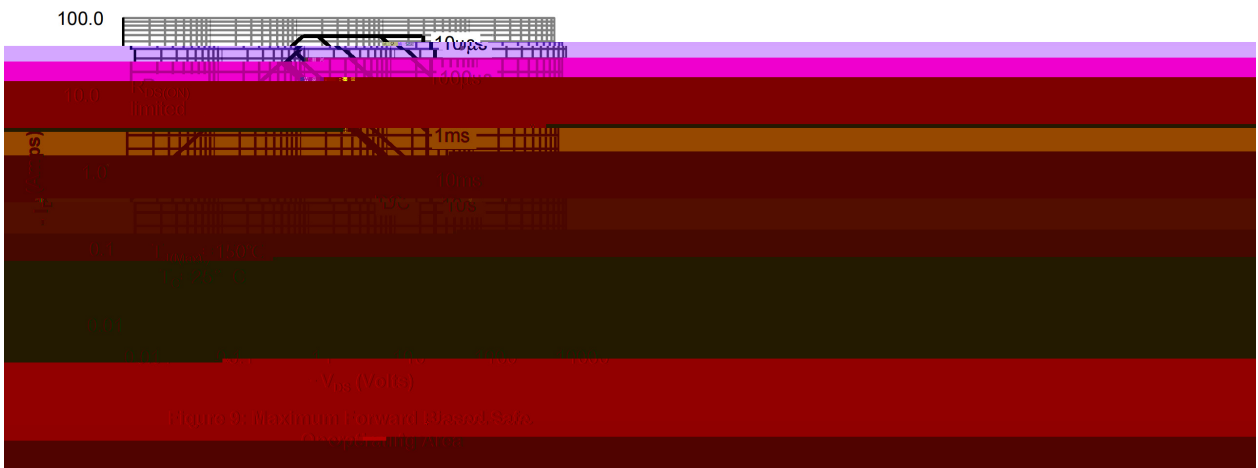


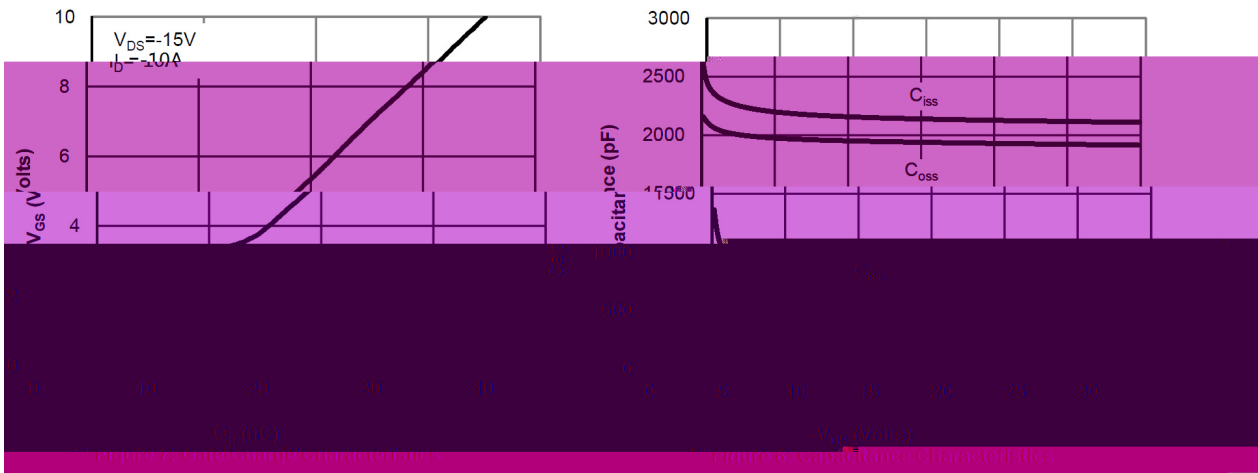


PDFN3X3-8L

Unit:mm



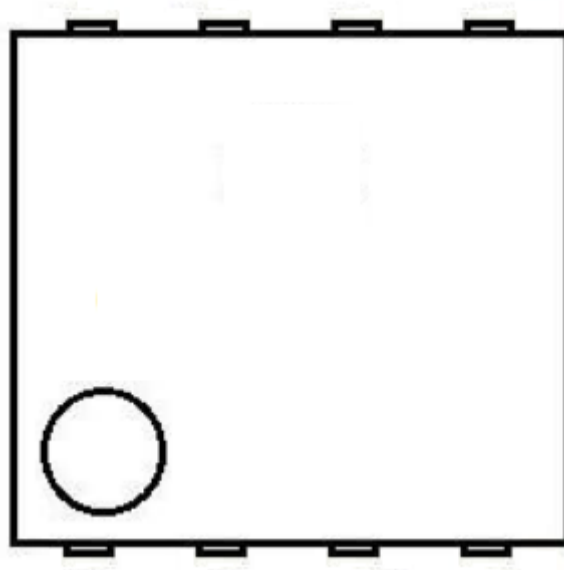

Temperature Profile for IR Reflow Soldering(Pb-Free)

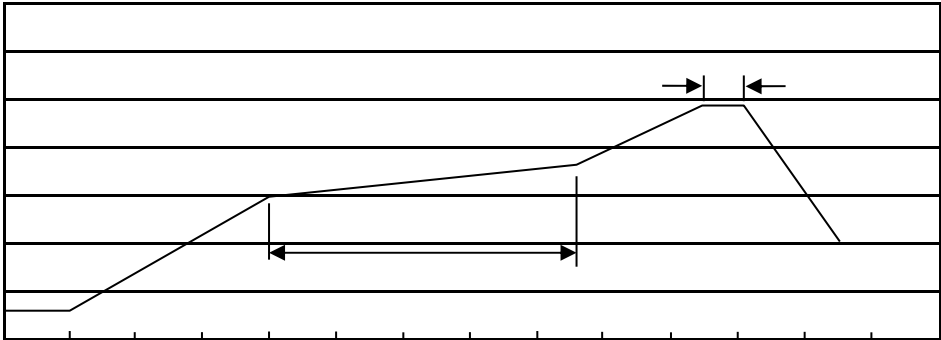

± ± ± ±

± ± ± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box