

BRCS080C04SC

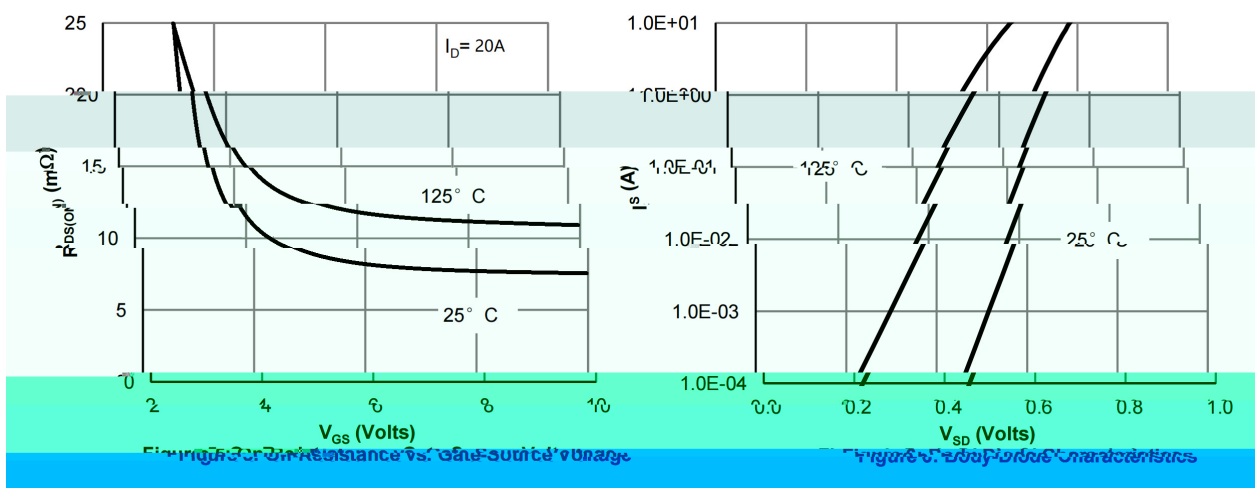
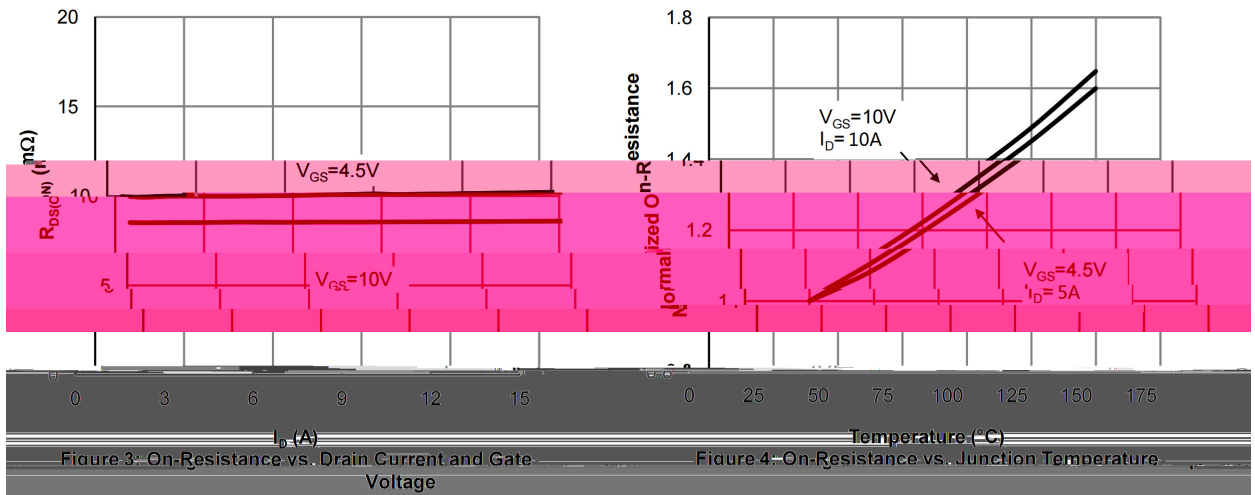
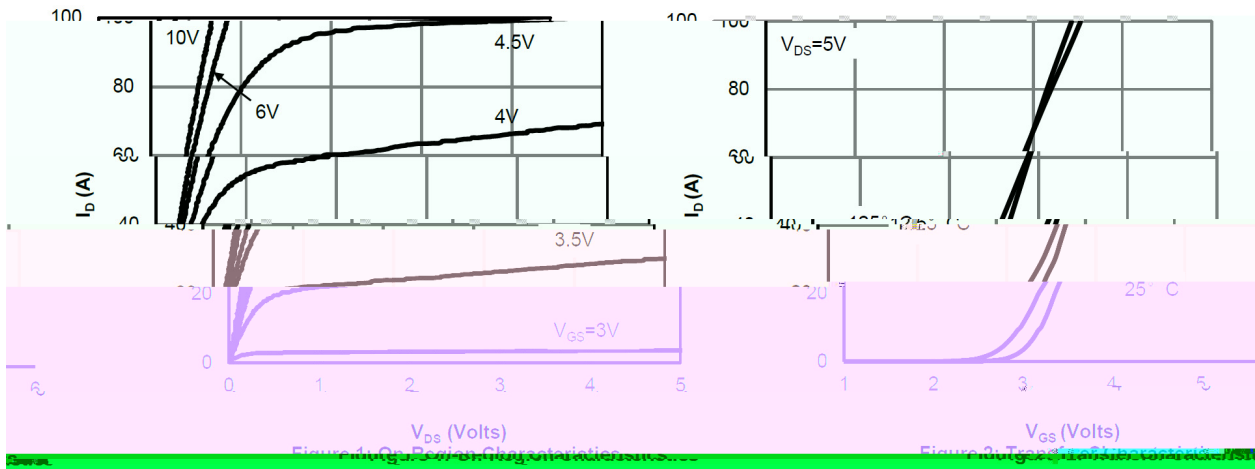


DATA SHEET

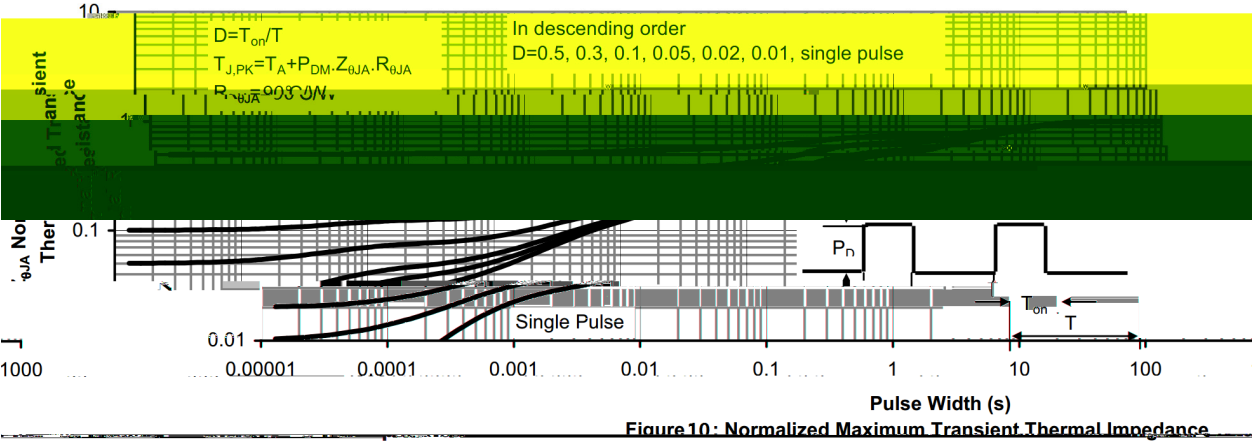
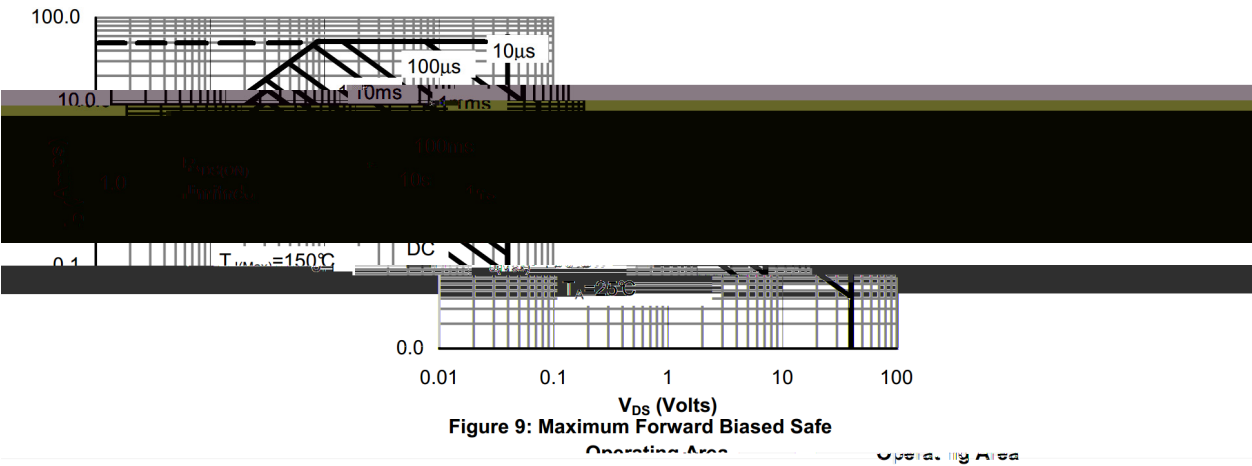
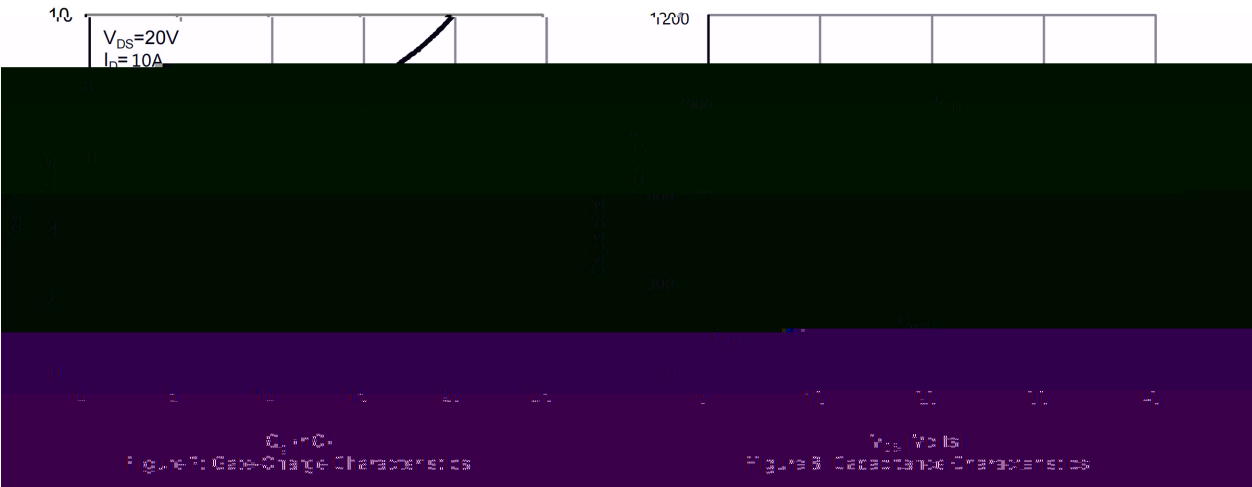
/ Absolute Maximum Ratings(Ta=25)

	0			

N- /N-CHANNEL Electrical Characteristics(Ta=25)

N- / N-CHANNEL Electrical Characteristic Curve


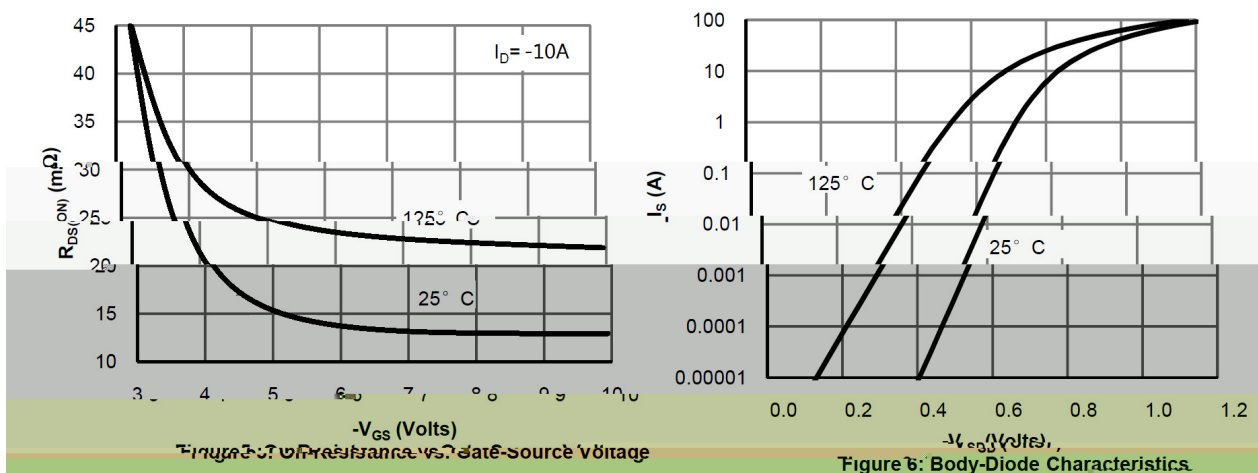
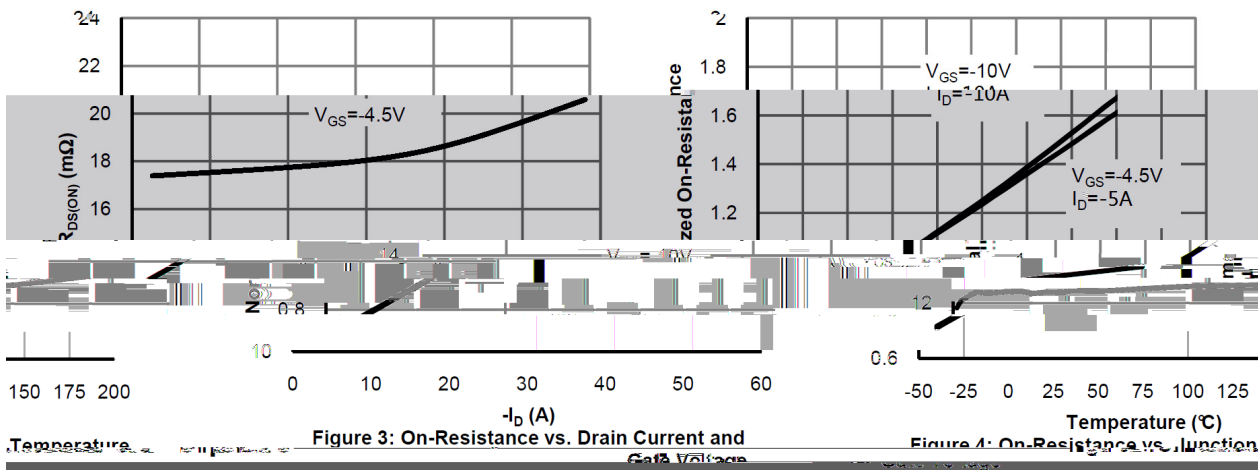
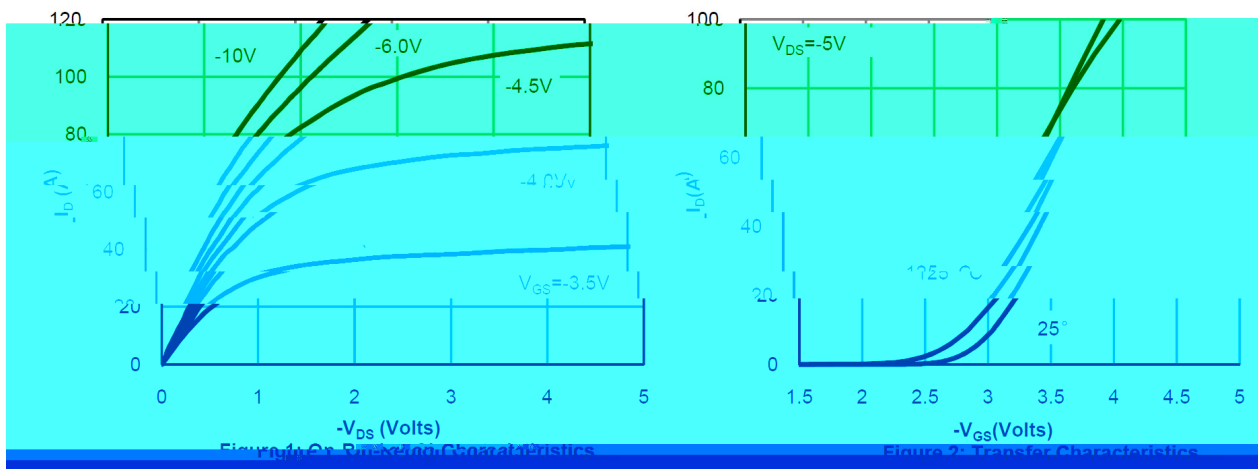
N- / N-CHANNEL Electrical Characteristic Curve

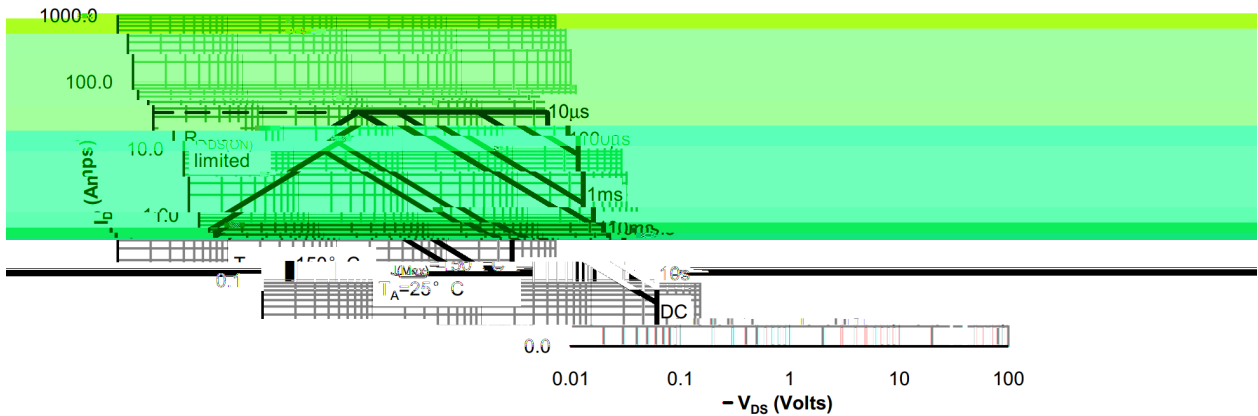
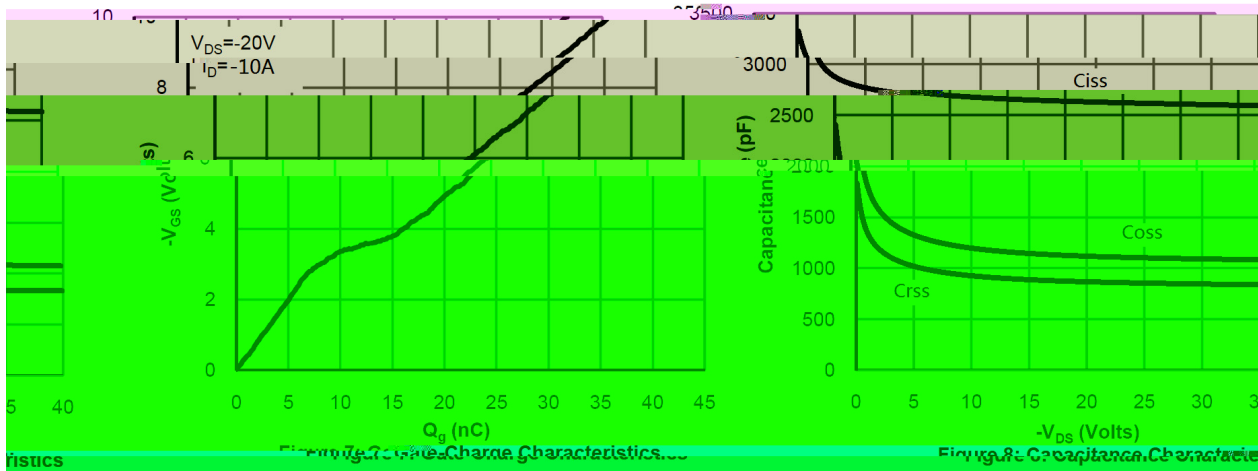
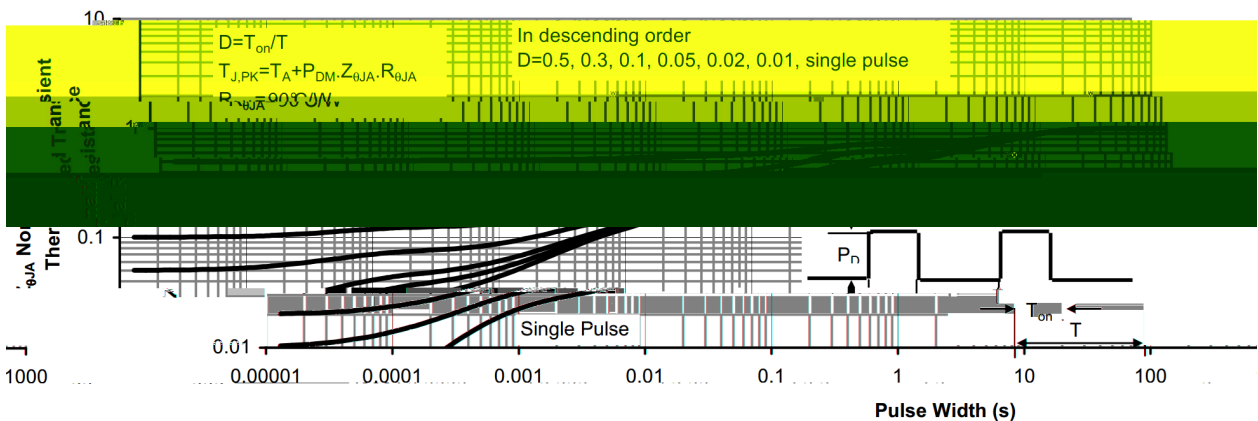


BRCS080C04SC

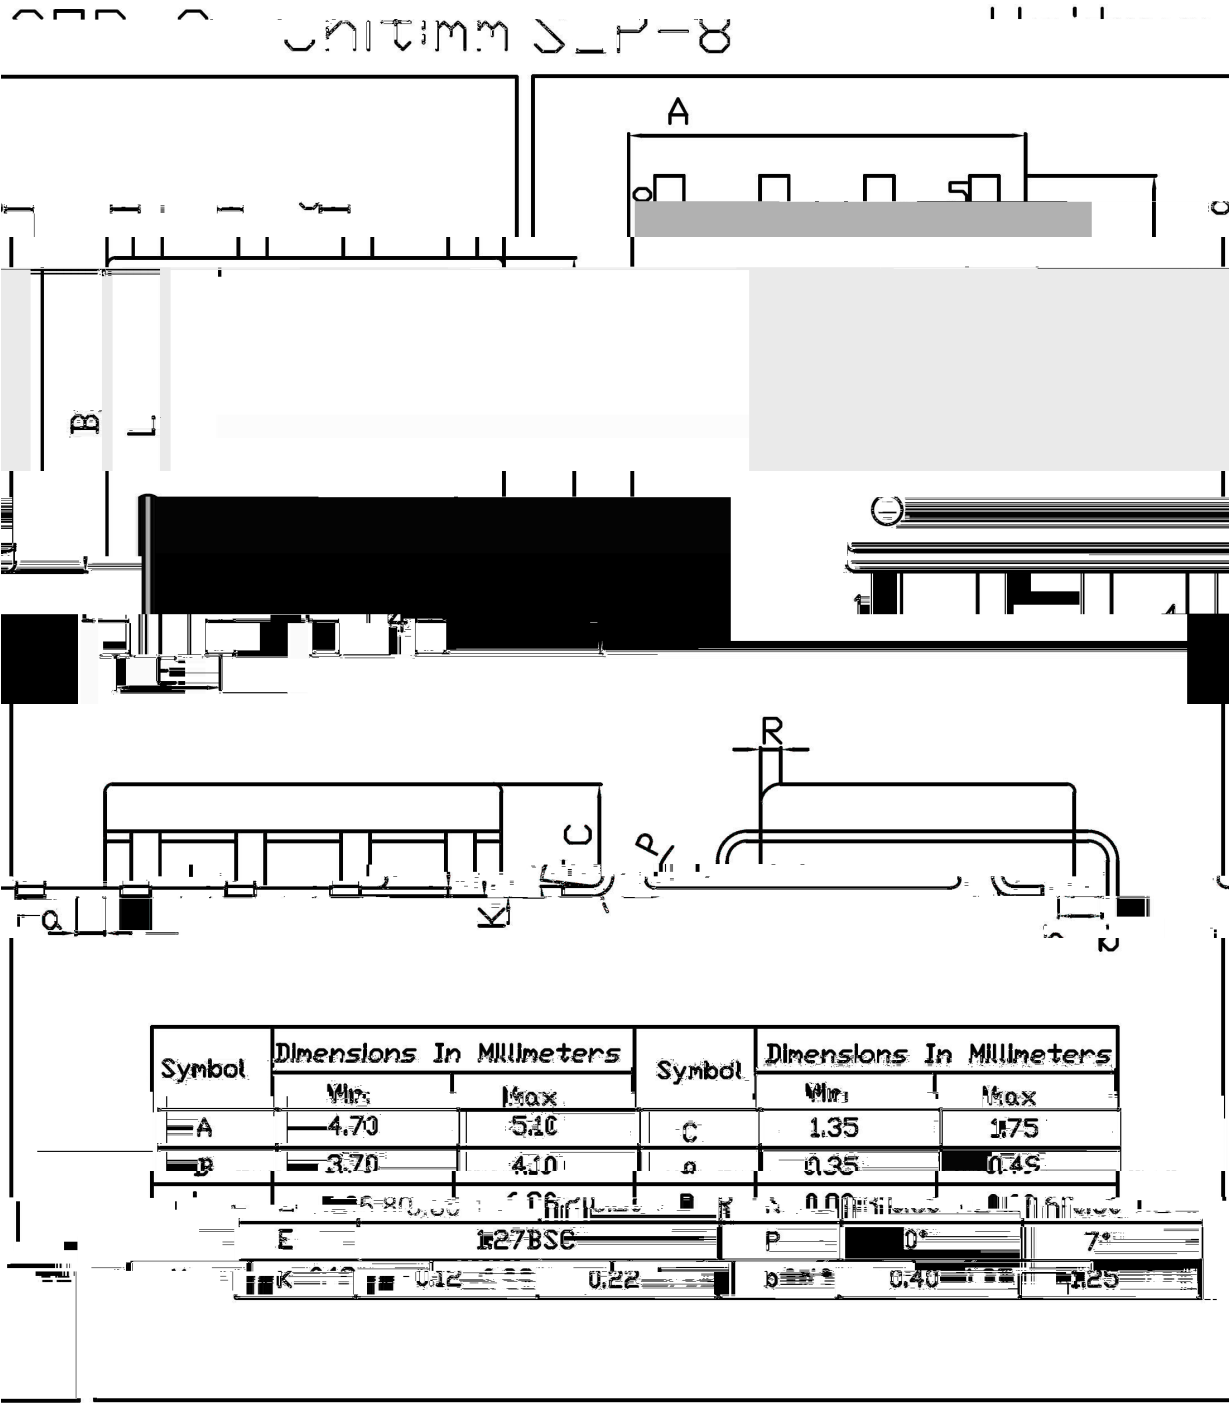


DATA SHEET

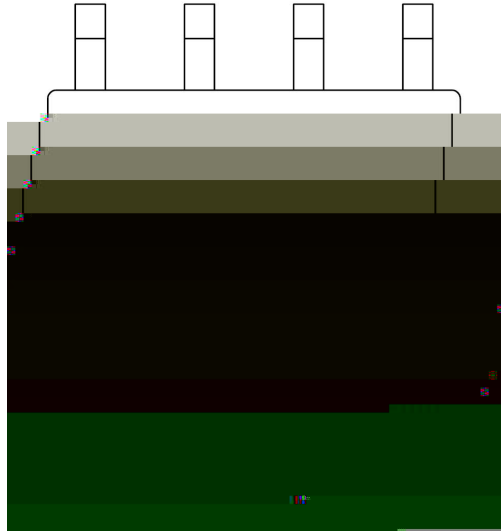
P- / P-CHANNEL Electrical Characteristic Curve


P- / P-CHANNEL Electrical Characteristic Curve

Figure 9: Maximum Forward Biased Safe Operating Area

Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions



/ Marking Instructions



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.