

/ Descriptions

N


/ Features

HF Product.


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning

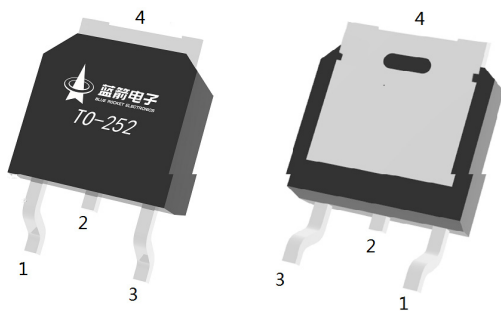

/ Marking

/ Absolute Maximum Ratings(Ta=25)

		θ		
		θ		




/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω

--	--	--	--	--

 Ω Ω

Electrical Characteristic Curve

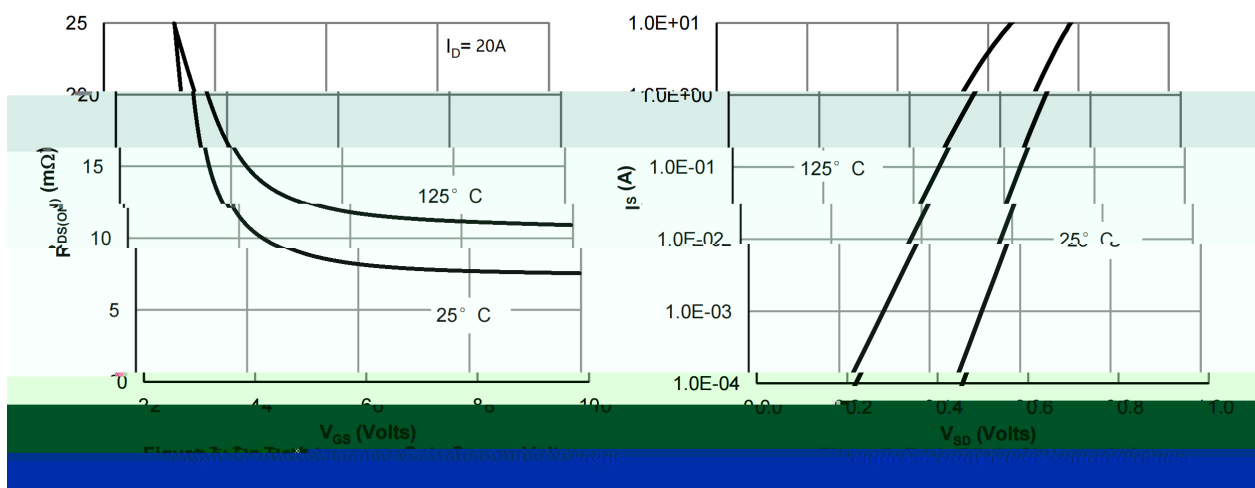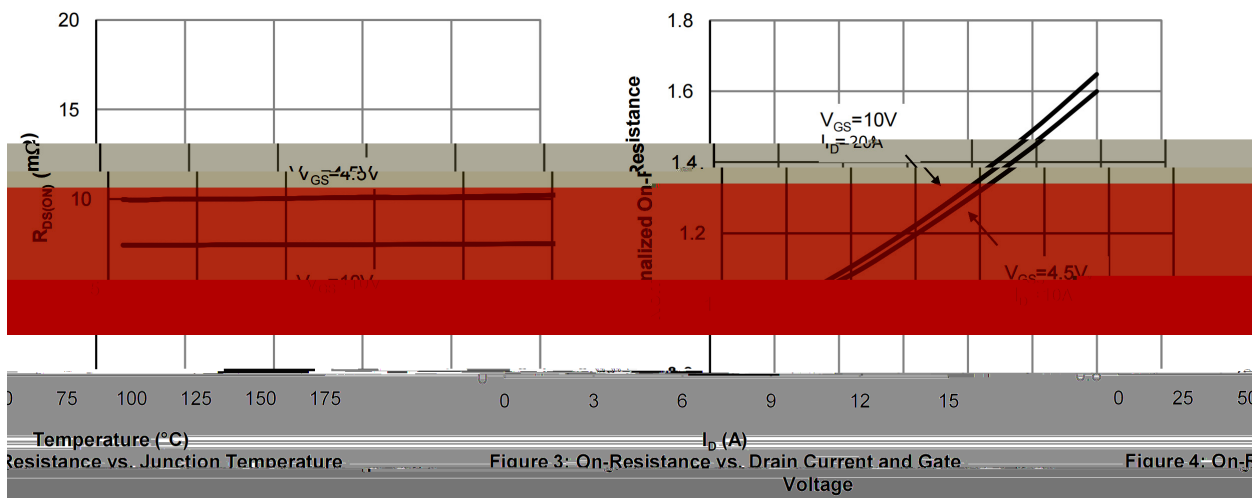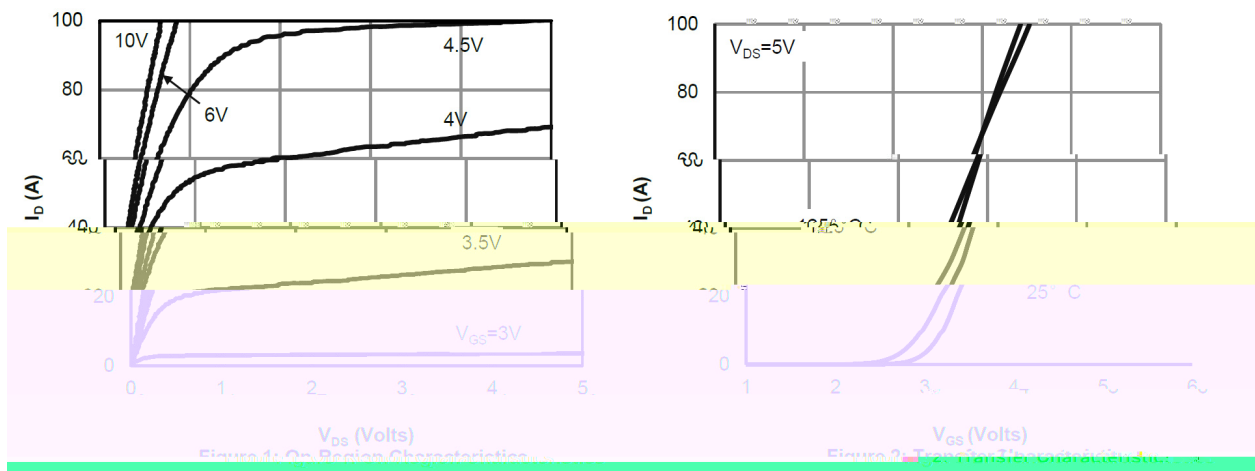

Electrical Characteristic Curve



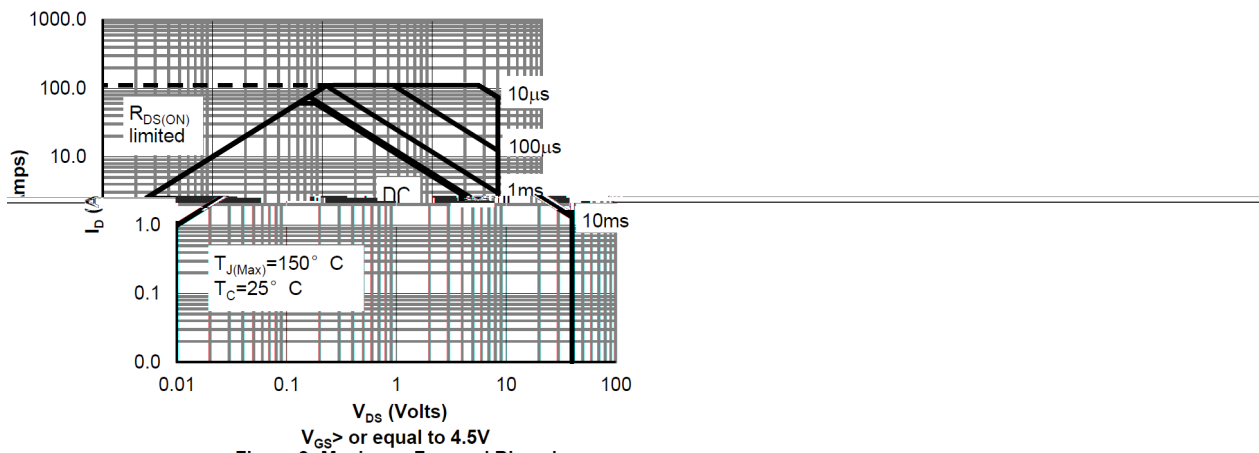


Figure 9: Maximum Forward Biased Safe Operating Area

Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

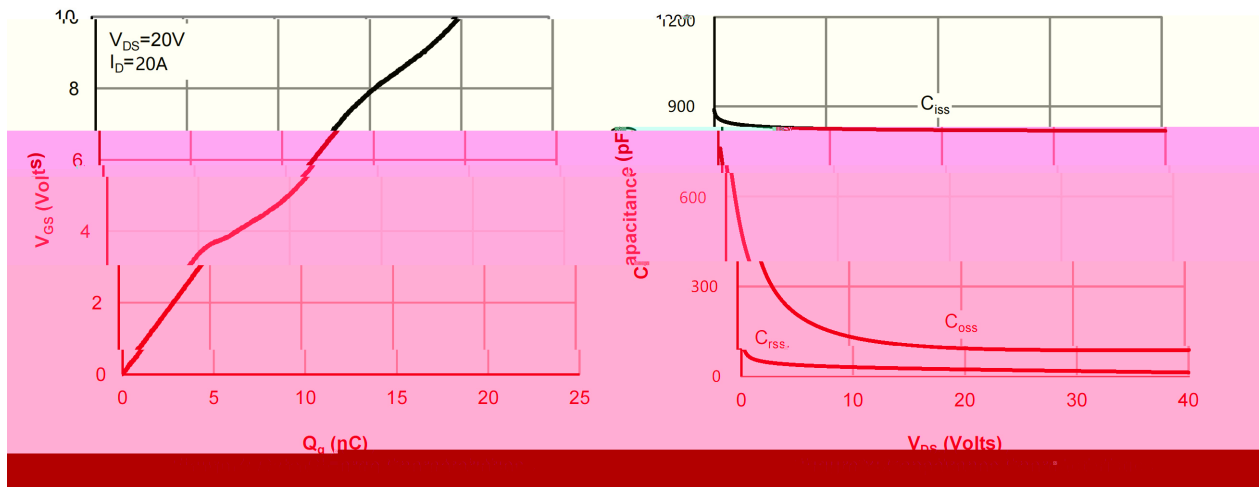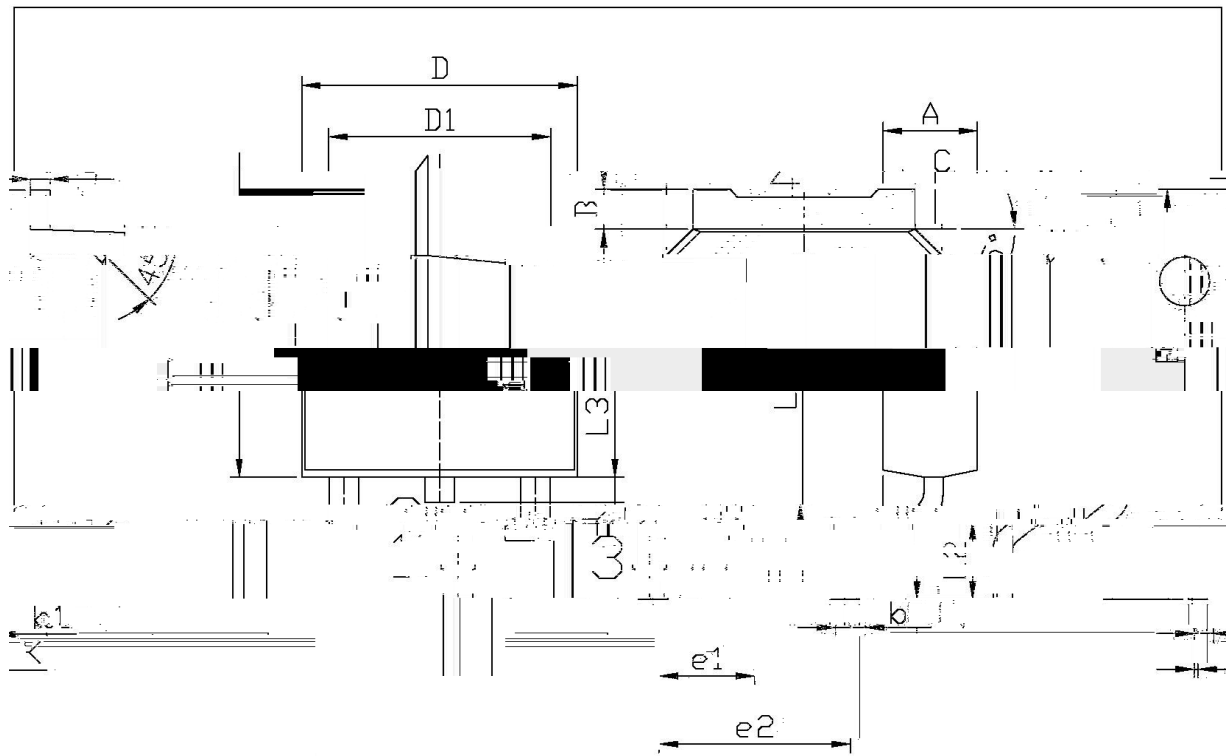


单位：mm

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
A	5.95	6.25	6.55	B	0.95	1.25	1.55
C	2.20	2.40	2.60	D	5.10	5.50	5.90
D1	5.10	5.50	5.90	L3	0.60	0.90	1.20
e1	2.24	2.34	2.44	e2	9.85	10.35	10.85
k1	0.45	0.55	0.65				

T0-252

/ Marking Instructions

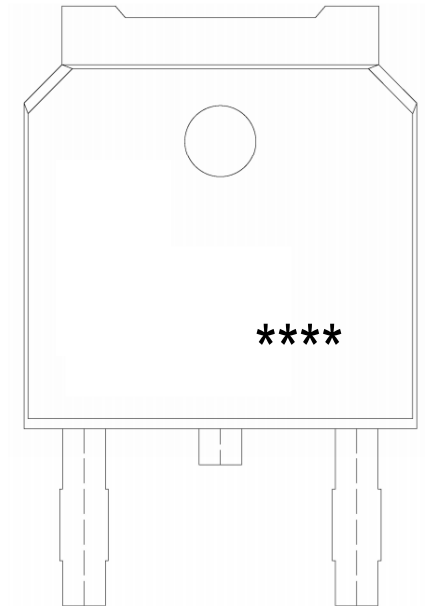

BR

080N04S

 $\pm$ $\pm$

8 8