

BRCS100N06DP

Rev.C Apr.-2025


N TO-252

N-CHANNEL MOSFET in a TO-252 Plastic Package.

Low gate charge, low crss, fast switching, HF Product.

DC/DC

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.









/ Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	60	V
Drain Current	$I_D(T_c=25^\circ\text{C})$	100	A
Peak Drain Current	I_{DM}	380	A
Gate-Source Voltage	V_{GS}	± 20	V
Single Pulsed Avalanche Energy	E_{AS}	602	mJ
Avalanche Current	I_{AS}	38.9	A
Total Power Dissipation	$P_D(T_c=25^\circ\text{C})$	60	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$
Thermal Resistance-Junction to Case	$R_{\theta JC}$	2.1	/W
Thermal Resistance-Junction to Ambient	$R_{\theta JA}$	62.5	

/ Electrical Characteristics($T_a=25^\circ\text{C}$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DS}	$V_{GS}=0V$ $I_D=250\text{ A}$	60			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V$ $V_{GS}=0V$			1	A
		$V_{DS}=60V$ $V_{GS}=0V$ $T_J=125^\circ\text{C}$			10	A
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\text{ A}$	2	2.6	4	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=50A$		5.9	7	$m\Omega$

/ Electrical Characteristic Curve

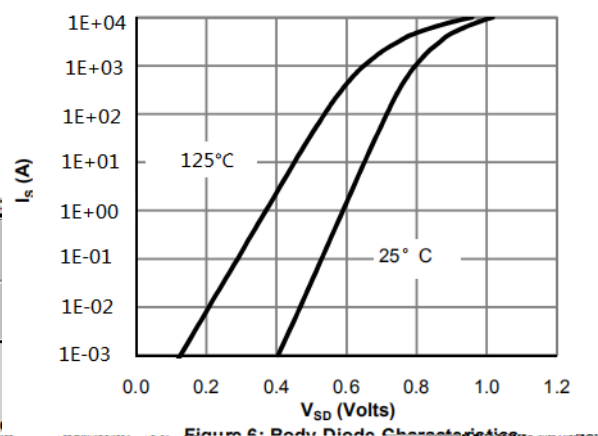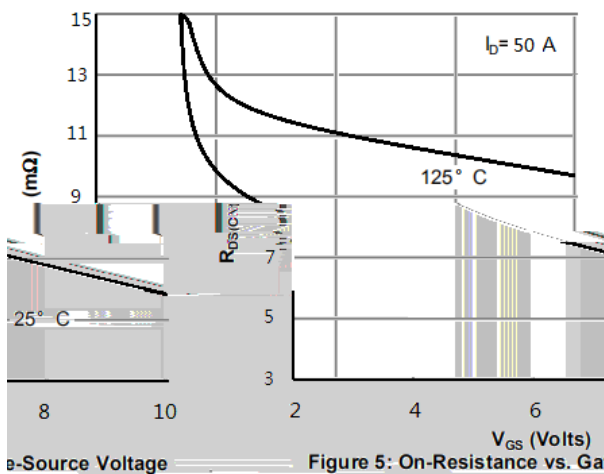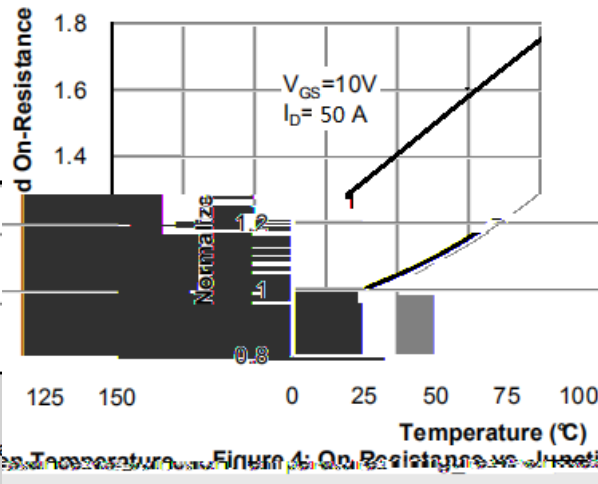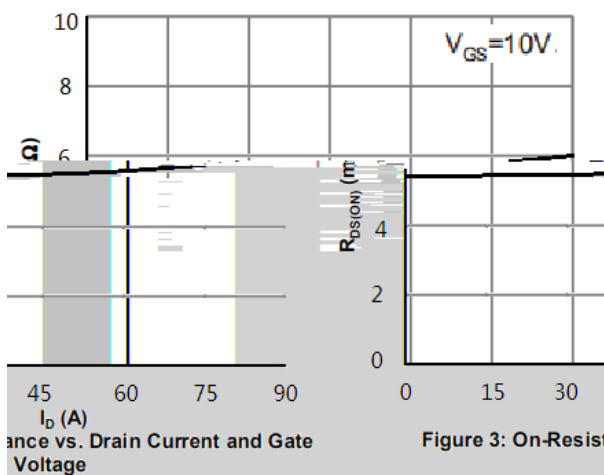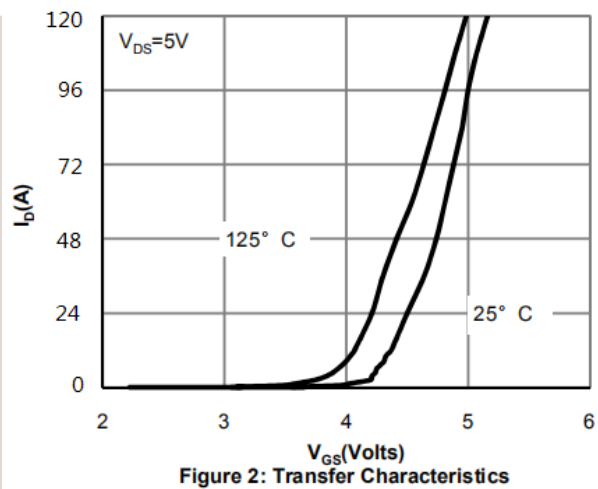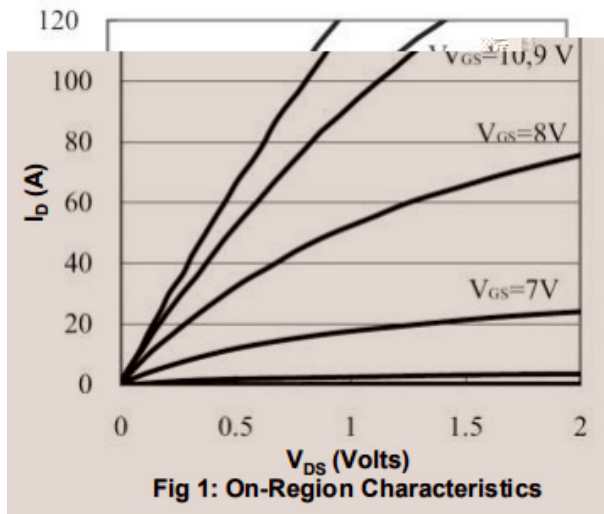

/ Electrical Characteristic Curve

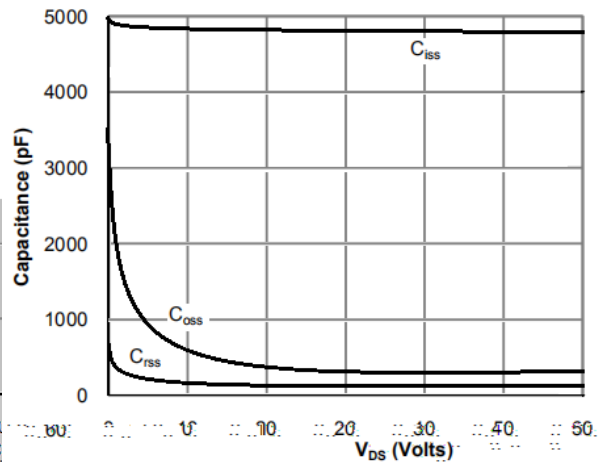
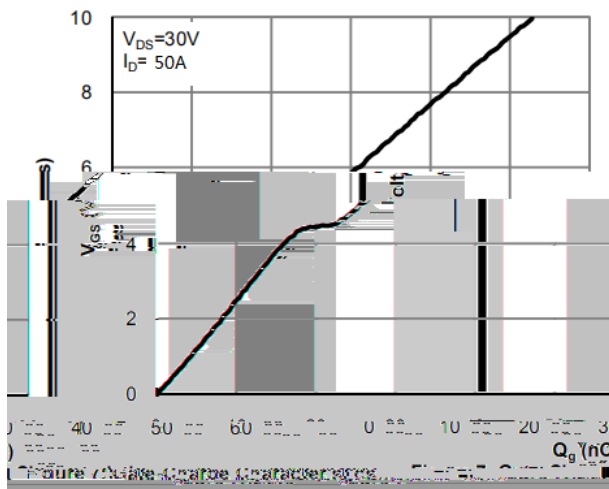


Figure 8: Capacitance Characteristics

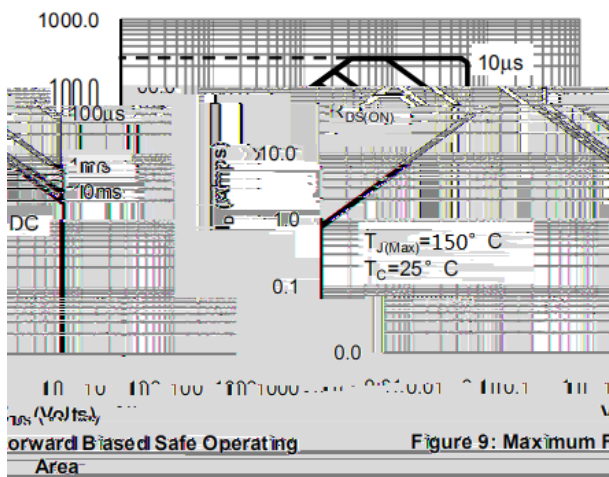


Figure 9: Maximum FBSOA


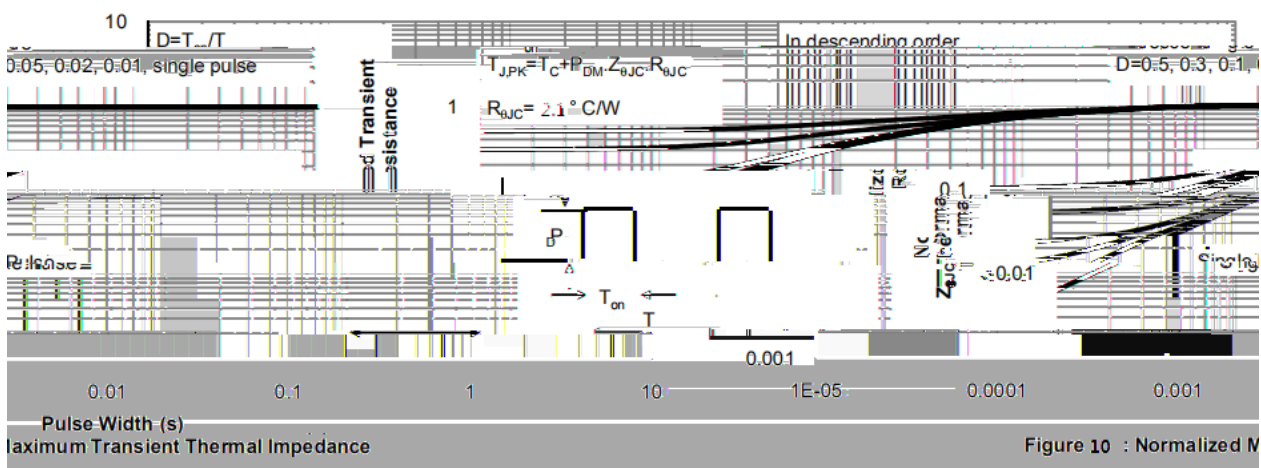


Figure 10 : Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

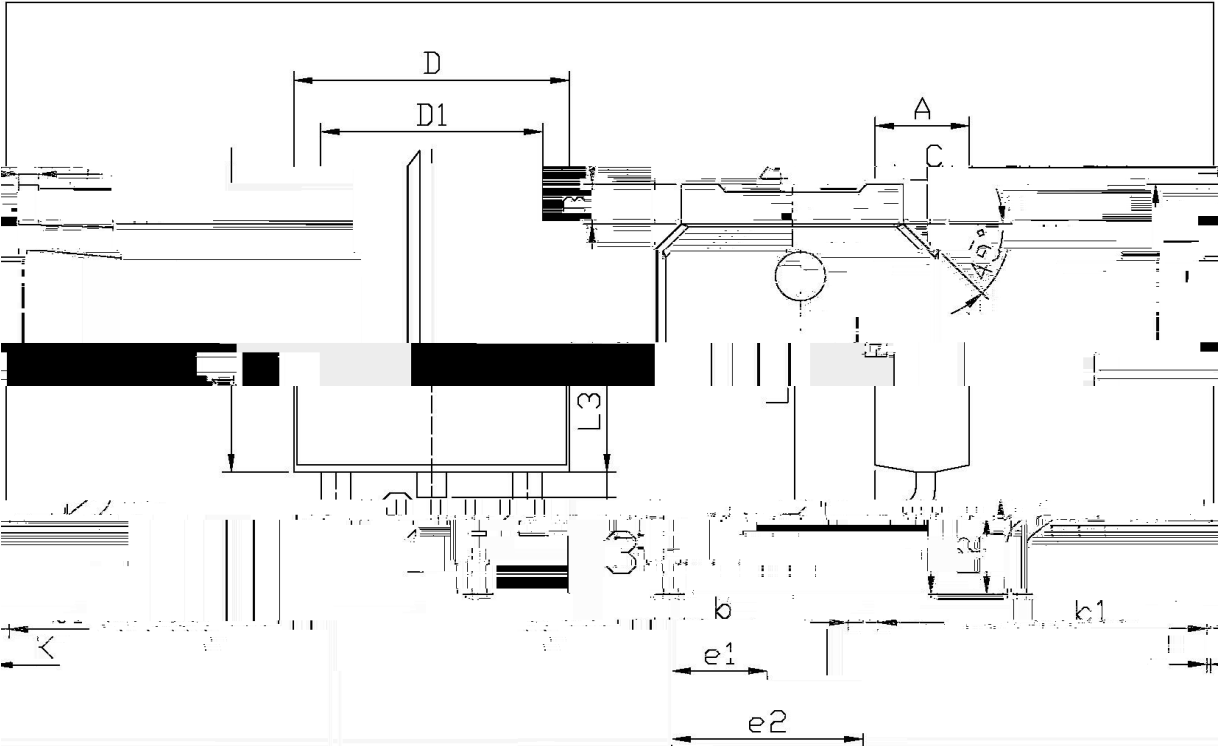

单位: mm


Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
25	6.25		4	2.20	2.40	E	5.0
24	2.34		"B	0.95	1.25	e1	2.0
10	1.73		b	0.70	0.80	e2	4.0
	9.85	10.35	b1	0.45	0.55	L1	
	0.3	0.60		1.70	2.00		
	0.90			6.45	6.75		
50	K	0.00	0.10	DL	5.10		5.0

□-252

T



/ Marking Instructions

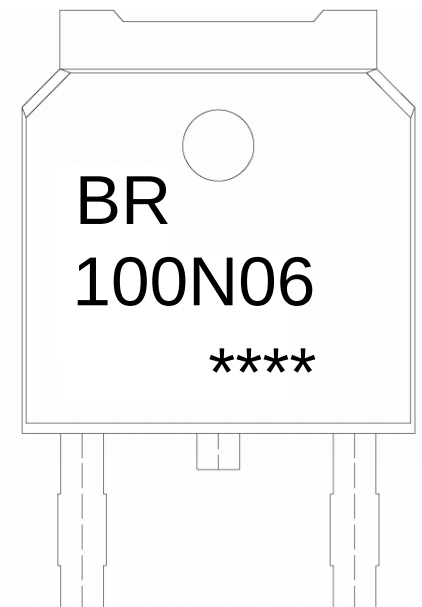

BR

100N06


Note:

BR: Company Code

100N06: Product Type Code

*****: Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

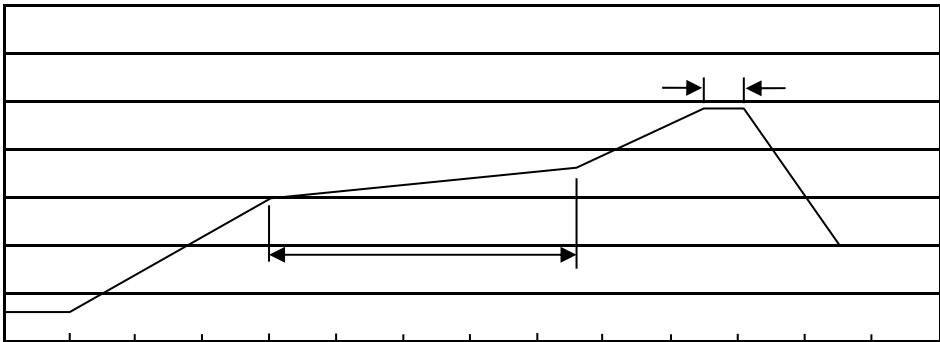

- Note:
- 11501806090sec;

2245±55±0.5sec;

3210/sec.
- 1.Preheating:150~180, Time:60~90sec.

2.Peak Temp.:245±5, Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±510±1 sec.Temp.:260±5℃Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices